



ALLIED MACHINE & ENGINEERING

Holemaking Solutions for Today's Manufacturing



Boring




Reaming



Burnishing



Threading



Specials



Superion[®]

► **SPECIALS**

Technical Information

Solid Carbide Drilling Tools



Out of the Box Solutions

The Superion Philosophy

Superion became a subsidiary of Allied Machine and Engineering in 2016.

We share a common mission to provide product excellence, expert technical support, and innovative holmaking solutions to our metal-cutting partners. As Superion's foundation was built on serving partners in the automotive industry and other lean manufacturing, we remain firmly rooted in a tradition of process improvements and capabilities.

We have strengthened these roots while growing to serve the unique cutting tool needs of new industries such as aerospace, defense, equipment testing, material processing, and more.

With significant investment in technology, Superion has opened the door for our team to manufacture new solutions including several carbide and PCD configurations. We focus on providing solutions that reduce our customers' costs, increase throughput and assist in developing processes that allow for consistent and repeatable performance.

Material-specific coatings / geometries	Reduce setup times	Decrease cost per hole
---	--------------------	------------------------

Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General Machining



Oil & Gas



Renewable Energy

Your safety and the safety of others is very important. This catalog contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalog, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalog. Safety messages follow these words.

WARNING

WARNING (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

NOTICE means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

NOTE and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit www.alliedmachine.com for the most up-to-date information and procedures.


Reference Icons

The following icons will appear throughout the catalog to help you navigate between products.



Setup / Assembly Information

Detailed instructions and information regarding the corresponding part(s)



Recommended Cutting Data

Speed and feed recommendations for optimum and safe drilling

Introduction Information

Superion Capabilities	2
Superion Applications	3
Case Studies	4 - 5
Superion Geometries	6 - 7

Recommended Cutting Data

Imperial (inch)	8 - 11
Metric (mm)	12 - 15

Coolant Recommendations 16

Deep Hole Drilling Guidelines 17

Troubleshooting Guide 18 - 19

Superion Quote Form 20

Superion Capabilities

A
DRILLING
B
BORING
C
REAMING
D
BURNISHING
E
THREADING
X
SPECIALS

WHAT IS SUPERION?

Superion capabilities provide cutting edge solutions in both solid carbide and PCD tooling.

WHY SHOULD YOU USE SUPERION?

- State-of-the-art manufacturing automation allows for high repeatability and consistency, regardless of the quantity you need.
- Superion provides application-specific solutions tailored to meet your toughest demands.
- Superion tooling excels in difficult and unique material applications.
- Our goal is to provide you a quality solution to exceed your need on a schedule that satisfies.

WHEN SHOULD YOU USE SUPERION?


- When finish is critical and dimensions are tight, Superion will deliver a tool to maintain your tolerances.
- When your tooling budget requires regrinds and the ability to remanufacture, Superion tackles your needs.
- If you're dealing with CFRP or other unique materials, Superion tooling is the right solution.



Tough Applications SOLVED

FROM CONCEPT TO REALITY

Allied's team of engineers is ready to assist you with your application. We'll gather all the information we need about your application and turn your concept into reality. Give us a call today to collaborate with you. We'll listen to your needs, formulate a concept, develop the model, and build the solution.

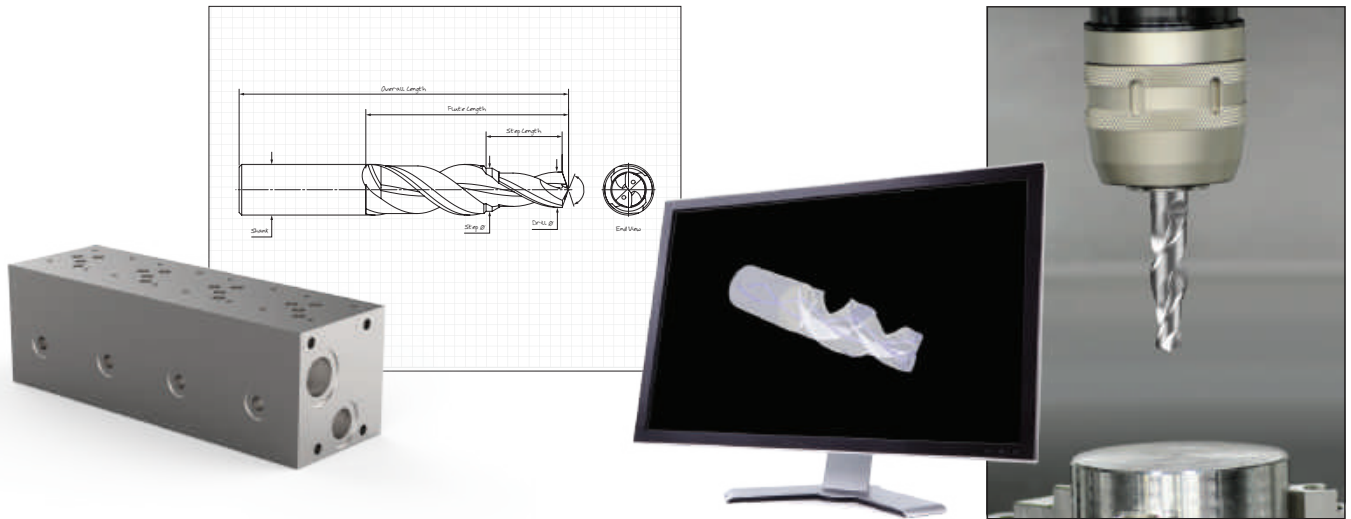


AEROSPACE / Landing Gear Components



DRILL BURNISH TOOLS

Reduce cycle time, increase throughput, and increase profitability by combining roughing and finishing operations using our burnishing geometry for applications in which surface finish and hole tolerance are critical.

AUTOMOTIVE / Crankshafts



COMBINATION TOOLS

Combine multiple steps and various profile features to improve throughput. Combination tools reduce cost per hole and increase profit potential.

HEAVY EQUIPMENT / Manifolds



SOLID CARBIDE TOOLS WITH COOLANT

Solid carbide solutions optimize the manufacturing of manifolds. Most port specs call for at least 3 steps, and combining these features can reduce costs and increase throughput.

AUTOMOTIVE / Transmission Components



SOLID CARBIDE STEP TOOLS


You can rely on Superior's state-of-the-art manufacturing facility, built specifically to satisfy the customer's need whether it's 10 drills or 1,000 drills. Superior will provide consistent and effective solutions to your production needs.

Case Study

A
DRILLING
B
BORING
C
REAMING
D
BURNISHING
E
THREADING
X
SPECIALS

If you need to hold a tight tolerance, we have the solution.

When an application requires you to hold a tight tolerance, it quickly eliminates many tooling options because those options aren't capable of holding the strict tolerance. Our customer was using a solid carbide drill to machine cylinder heads for the automotive industry. The cylinder blocks were made from A356 aluminum.




When the end user raised concerns over the hole tolerance created by our customer's previous tooling, our customer changed the required tolerance from ± 0.0005 " (± 0.013 mm) to ± 0.0003 " (± 0.009 mm). However, the previous tooling couldn't achieve the new tolerance requirements.

The customer tested the **Superion Solid Carbide Step Burnishing Drill** in this application. The Superior drill did exactly what the customer needed and successfully held the new tolerance of ± 0.0003 " (± 0.009 mm). It also held the new tolerance with a 1.66 CPK, which was higher than the previous tool's CPK even at the initial ± 0.0005 " (± 0.013 mm) tolerance.

Don't tolerate tolerance issues. **Call us to help you find the right tool for the job.**

		Measure	Superion® Step Burnishing Drill
Product:	Superion® Step Burnishing Drill	RPM	3,490
Objectives:	Achieve required tolerance	Speed	528 SFM (160.1 M/min)
Industry:	Automotive	Feed	0.0115 IPR (0.29 mm/rev)
Part:	Cylinder head	Penetration Rate	43 IPM (1,100 mm/min)
Material:	A356 aluminum	Cycle Time	4 sec
Hole Ø:	0.579" (14.70 mm)	Tool Life	3,000 parts
Hole Depth:	1.181" (30.00 mm)	Tolerance	± 0.0003 " (± 0.009 mm)

▶ Superior Step Burnishing Drill

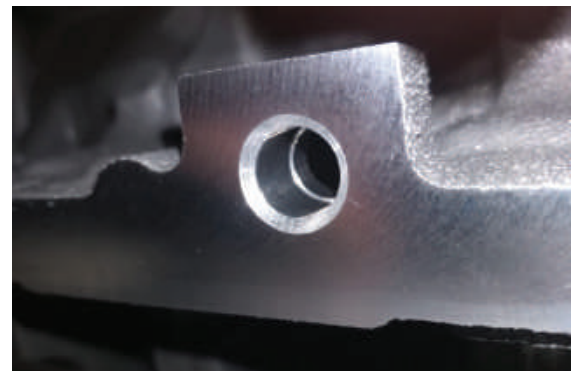

The Step Burnishing Drill provided:

- ✓ Required tolerance
- ✓ Increased CPK

Case Study: CS0503

Case Study

Old adage, modern innovation: the right tool for the job.

Reduce costs and eliminate headaches by calling us to help solve your challenges. If your current process doesn't seem to be providing the results you want, you might be using the wrong tooling. Our customer was using a diamond-coated end mill to machine guide pads on frac pocket plugs used in down-hole oil drilling. The guide pads were made from fiberglass and glass wound filament material, which is very abrasive and shortens the life of cutting tools.



When the diamond coating wore off the end mill, the carbide substrate was exposed directly to the abrasive material, and the tool would quickly fail. The customer needed an optimized tool to extend tool life in this abrasive material and to solidify the repeatability of the process.

The customer tested the **Superion® PCD Flat Bottom Drill** in this application. The PCD substrate is more wear-resistant in the fiberglass material and provided more even wear of the tool throughout the process. Much to the customer's delight, the Superion drill ran at a higher penetration rate, which shortened cycle time. Most importantly, the Superion drill increased the customer's tool life from 7,500 holes to 50,000 holes (a 567% increase).

A costly application became effective and worry-free by finding the right tooling. The Superion drill didn't just increase the customer's tool life; it provided a repeatable, reliable process so the customer could "set it and forget it."

Don't tolerate unnecessary hassle and stress in your production. **Call us to help you find the right tool for the job.**

Product:	Superion® PCD Flat Bottom Drill	Measure	Diamond Coated End Mill	Superion® PCD Flat Bottom Drill
		Objectives:	Increase tool life	RPM
Industry:	Oil & gas/petrochemical	Speed	448 SFM (136.55 M/min)	746 SFM (227.381 M/min)
Part:	Frac pocket plug guide pads	Feed Rate	0.008 IPR (0.203 mm/rev)	0.008 IPR (0.203 mm/rev)
Material:	Fiberglass and glass wound filament	Penetration Rate	36 IPM (914.4 mm/min)	60 IPM (1524 mm/min)
Hole Ø:	0.380" (9.652 mm)	Cycle Time	0.46 sec	0.28 sec
Hole Depth:	0.275" (6.985 mm)	Tool Life	7,500 holes	50,000 holes

► Superion PCD solid carbide flat bottom drill

567% tool life increase



The PCD substrate for wear-resistance in abrasive materials provided:

- ✓ Increased tool life
- ✓ Increased penetration rate
- ✓ Repeatable/reliable machining process

Case Study: CS0502

A
DRILLING
B
BORING
C
REAMING
D
BURNISHING
E
THREADING
X
SPECIALS

Superion Geometries

There's a Geometry for That

Allied Machine knows there isn't a one-size-fits-all solution when it comes to holmaking. To better accommodate the countless holes our customers drill, we offer multiple options in material-specific geometries and material-specific coatings.


Superion geometries feature a unique edge prep tailored to specific material groups to optimize tool life and edge strength. Some geometries also offer solutions for rough and finish burnishing.

If you're unsure which geometry would be best for your application, give our Application Engineers a call. They're standing by, ready to help.

☎ 1.330.343.4283 ext: 7611

☎ 1.800.321.5537 (toll free United States and Canada)


✉ appeng@alliedmachine.com

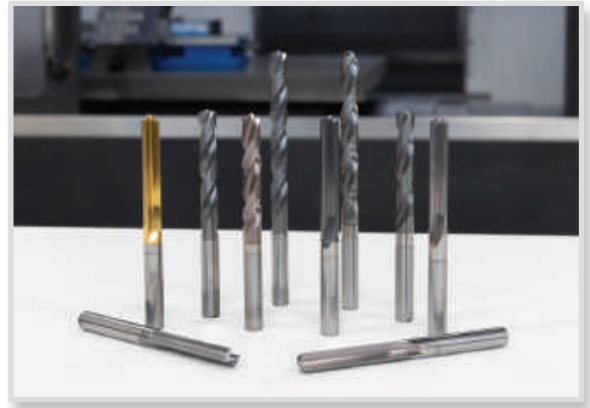

A
DRILLING
B
BORING
C
REAMING
D
URNISHING
E
HREADING
X
PECIALS


HPM

- Linear cutting edge aids in corner strength and improves chip formation in softer materials
- Free cutting primary and secondary clearance
- Ideal for drilling softer carbon, alloy and tool steel materials
- AM420 coating for enhanced heat thresholds and tool life
- TiCN coating for use in aluminum bronze



HPM2M

- HPM geometry with a double margin
- Recommended for improved hole tolerance and hole finish
- Recommended for interrupted cuts and drill depths greater than 8xD
- Double margins are optimized with a unique web for full engagement of all four margins at entry, leading to better stability
- AM420 coating for enhanced heat thresholds and tool life




HPS

- Radius cutting edge for improved chip formation
- Cam ground clearance for added point strength and stability
- Reduced bell mouth for longer drill depths
- OD flute edge prep for added corner strength
- Ideal for drilling harder steels, high-temp alloys, and stainless
- AM420 coating for enhanced heat thresholds and tool life in steels
- AM460 coating provides industry leading tool life in stainless and HRSA materials with our highest heat threshold coating available




HPS2M

- HPS geometry with a double margin
- Recommended for improved hole tolerance and hole finish
- Recommended for interrupted cuts and drill depths greater than 8xD
- Double margins are optimized with a unique web for full engagement of all four margins at entry, leading to better stability
- Ideal for drilling gray/white and SG/nodular cast iron
- AM420 coating for enhanced heat thresholds and tool life in steels
- AM440 coating for reduced flank wear in cast irons
- AM460 coating provides industry leading tool life in stainless and HRSA materials with our highest heat threshold coating available



HP106

- Optimized core, point, and web features for increased strength
- Utilizes a single margin design with straight flutes
- Ideal for drilling hardened steels and wear plates
- AM420 coating for enhanced heat thresholds and tool life



HPF


- Unique open geometry for high penetration rates specifically tailored for aluminum
- Double margins are optimized with a unique web for full engagement of all four margins at entry, leading to better stability
- Reduced helix angle for increased chip evacuation
- Enhanced surface finish on tool to improve chip flow and reduce built-up edge
- High lubricity TiCN coating for use in cast/wrought aluminum



Superion Geometries


CIB (cast iron burnishing drill)

- Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance
- Double margins designed for enhanced stability
- Minimized back taper to enhance straightness
- Ideal pre-drill when using carbide taps
- Straight flute design ideal for use on lathes
- Enhanced surface finish on tool to improve chip flow and reduce built-up edge
- AM440 coating for reduced flank wear in cast irons




CAB (cast aluminum burnishing drill)

- Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance
- Straight flute design ideal for use on lathes
- Double margins designed for enhanced stability
- Minimized back taper to enhance straightness
- Enhanced surface finish on tool to improve chip flow and reduce built-up edge
- TiCN coating to enhance lubricity when drilling in aluminum



WAB (wrought aluminum burnishing drill)

- Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance
- Straight flute design ideal for use on lathes
- Double margins designed for enhanced stability
- Minimized back taper to enhance straightness
- Geometry enhancements for drilling wrought aluminum
- Enhanced surface finish on tool to improve chip flow and reduce built-up edge
- TiCN coating to enhance lubricity when drilling in aluminum



BCB (brass copper burnishing drill)

- Straight flute design ideal for use on lathes
- Double margins designed for enhanced stability
- Minimized back taper to enhance straightness
- Geometry enhancements for drilling brass and copper
- Enhanced surface finish on tool to improve chip flow and reduce built-up edge
- TiN coating



A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING

X

SPECIALS

Recommended Drilling Data | Imperial (inch)

ISO	Material	Hardness (BHN)	General Application Geometry	Special Geometry*	Coating	Speed (SFM)	Feed Rate (IPR) by Diameter	
							0.118 - 0.157	0.157 - 0.197
P	Free Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HPM	● HPM2M	AM420	500	0.006	0.007
		150 - 200	HPM	● HPM2M	AM420	475	0.005	0.0065
		200 - 250	HPS	▲ HPS2M	AM420	450	0.004	0.006
	Low Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HPM	● HPM2M	AM420	455	0.006	0.007
		125 - 175	HPM	● HPM2M	AM420	440	0.006	0.0065
		175 - 225	HPM	● HPM2M	AM420	425	0.005	0.006
		225 - 275	HPS	▲ HPS2M	AM420	410	0.0045	0.006
	Medium Carbon Steel 1030, 1040, 1050, 1527, 1151, etc.	125 - 175	HPM	● HPM2M	AM420	440	0.0055	0.006
		175 - 225	HPM	● HPM2M	AM420	430	0.005	0.0055
		225 - 275	HPS	▲ HPS2M	AM420	400	0.0045	0.005
		275 - 325	HPS	▲ HPS2M	AM420	375	0.004	0.005
	Alloy Steel 4140, 5140, 8640, etc.	125-175	HPM	● HPM2M	AM420	405	0.0055	0.006
		175-225	HPM	● HPM2M	AM420	380	0.005	0.0055
		225-275	HPS	▲ HPS2M	AM420	365	0.004	0.005
		275-325	HPS	▲ HPS2M	AM420	340	0.004	0.005
		325-375	HP106	-	AM420	325	0.0035	0.0045
	High Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	HPS	▲ HPS2M	AM420	340	0.004	0.005
		300 - 350	HPS	▲ HPS2M	AM420	320	0.004	0.005
		350 - 400	HP106	-	AM420	250	0.0035	0.004
	Structural Steel A36, A285, A516, etc.	100 - 150	HPS	▲ HPS2M	AM420	450	0.0055	0.0065
150 - 250		HPS	▲ HPS2M	AM420	425	0.0045	0.0055	
250 - 350		HPS	▲ HPS2M	AM420	390	0.004	0.005	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	HPM	● HPM2M	AM420	270	0.0045	0.0045	
	200 - 250	HPS	▲ HPS2M	AM420	250	0.004	0.004	
S	High Temp Alloy Hastelloy B, Inconel 600, etc.	140-220	HPS	-	AM460	110	0.003	0.003
		220-310	HPS	-	AM460	100	0.002	0.002
	Titanium Alloy	140-220	HPS	-	AM460	150	0.0025	0.003
		220-310	HPS	-	AM460	120	0.002	0.0025
	Aerospace Alloy S82	185-275	HPS	-	AM460	160	0.003	0.003
		275-350	HPS	-	AM460	130	0.002	0.002

*Special Geometry

- Use HPM2M for greater drill depths over 8xD. HPM2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPM.
- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

⚠ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Imperial (inch)

Feed Rate (IPR) by Diameter								
0.197 - 0.236	0.236 - 0.276	0.276 - 0.315	0.315 - 0.394	0.394 - 0.472	0.472 - 0.551	0.551 - 0.630	0.630 - 0.709	0.709 - 0.787
0.008	0.009	0.010	0.012	0.013	0.015	0.017	0.018	0.020
0.0075	0.0085	0.0095	0.011	0.012	0.014	0.016	0.017	0.019
0.007	0.008	0.009	0.010	0.011	0.013	0.015	0.016	0.018
0.008	0.009	0.010	0.012	0.0135	0.0145	0.0165	0.0175	0.0195
0.0075	0.0085	0.0095	0.0115	0.013	0.014	0.016	0.017	0.019
0.007	0.008	0.009	0.011	0.0125	0.0135	0.015	0.016	0.018
0.007	0.008	0.009	0.010	0.012	0.013	0.015	0.016	0.018
0.007	0.0075	0.009	0.011	0.012	0.013	0.0145	0.016	0.0175
0.006	0.007	0.0085	0.0105	0.0115	0.0125	0.014	0.0155	0.017
0.006	0.007	0.0085	0.0105	0.011	0.0125	0.0135	0.0145	0.0165
0.0055	0.0065	0.008	0.010	0.011	0.012	0.013	0.014	0.016
0.0065	0.0075	0.0085	0.0105	0.0115	0.013	0.0145	0.016	0.017
0.006	0.007	0.008	0.010	0.011	0.0125	0.014	0.0155	0.0165
0.006	0.0065	0.008	0.0095	0.0105	0.012	0.0135	0.0145	0.0155
0.0055	0.006	0.0075	0.009	0.010	0.0115	0.013	0.014	0.015
0.005	0.0055	0.007	0.009	0.010	0.011	0.0125	0.0135	0.0145
0.006	0.0065	0.008	0.0095	0.0105	0.012	0.0135	0.0145	0.0155
0.0055	0.006	0.0075	0.009	0.01	0.0115	0.013	0.014	0.015
0.0045	0.0055	0.0065	0.008	0.0085	0.010	0.011	0.012	0.013
0.007	0.008	0.0095	0.012	0.013	0.014	0.0155	0.016	0.0185
0.006	0.007	0.008	0.011	0.012	0.012	0.0135	0.014	0.016
0.0055	0.0065	0.0075	0.0095	0.0105	0.0115	0.0125	0.0135	0.015
0.005	0.006	0.007	0.0095	0.010	0.011	0.0125	0.013	0.015
0.0045	0.0055	0.0065	0.0085	0.009	0.010	0.0115	0.012	0.014
0.0035	0.004	0.0045	0.0055	0.006	0.0065	0.007	0.0075	0.0085
0.003	0.0035	0.0035	0.0045	0.005	0.006	0.0065	0.0065	0.0075
0.0035	0.004	0.0045	0.006	0.006	0.007	0.0075	0.008	0.009
0.003	0.0035	0.004	0.005	0.0055	0.006	0.007	0.007	0.008
0.0035	0.004	0.004	0.0045	0.0055	0.006	0.0065	0.007	0.008
0.003	0.0035	0.0035	0.004	0.0045	0.0055	0.006	0.006	0.007

*Special Geometry

- Use HPM2M for greater drill depths over 8xD. HPM2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPM.
- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

▲ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Imperial (inch)

ISO	Material	Hardness (BHN)	General Application Geometry	Special Geometry	Coating	Speed (SFM)	Feed Rate (IPR) by Diameter	
							0.118 - 0.157	0.157 - 0.197
M	Stainless Steel 400 Series 416, 420, etc.	185-275	HPS	▲ HPS2M	AM460	250	0.004	0.0045
		275-350	HPS	▲ HPS2M	AM460	195	0.0035	0.004
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135-185	HPS	▲ HPS2M	AM460	200	0.0035	0.004
		185-275	HPS	▲ HPS2M	AM460	175	0.003	0.0035
	Super Duplex Stainless Steel	135-185	HPS	▲ HPS2M	AM460	150	0.0035	0.004
185-275		HPS	▲ HPS2M	AM460	135	0.003	0.0035	
H	Wear Plate Hardox, AR400, T-1, etc.	400	HP106	-	AM420	170	0.002	0.002
		500	HP106	-	AM420	140	0.002	0.002
		600	HP106	-	AM420	100	0.002	0.002
	Hardened Steel	300-400	HP106	-	AM420	170	0.002	0.002
		400-500	HP106	-	AM420	140	0.002	0.002
K	SG/Nodular Cast Iron	120-150	HPS2M	◆ CIB	AM440	500	0.008	0.0085
		150-200	HPS2M	◆ CIB	AM440	485	0.007	0.0075
		200-220	HPS2M	◆ CIB	AM440	470	0.006	0.007
		220-260	HPS2M	◆ CIB	AM440	455	0.006	0.007
		260-320	HPS2M	◆ CIB	AM440	415	0.005	0.0065
	Gray/White Cast Iron	120-150	HPS2M	◆ CIB	AM440	545	0.009	0.0095
		150-200	HPS2M	◆ CIB	AM440	530	0.008	0.0085
		200-220	HPS2M	◆ CIB	AM440	515	0.007	0.008
		220-260	HPS2M	◆ CIB	AM440	475	0.007	0.008
		260-320	HPS2M	◆ CIB	AM440	450	0.006	0.0075
N	Cast Aluminum	30	HPF	○ CAB	TiCN	950	0.0075	0.0085
		180	HPF	○ CAB	TiCN	755	0.0065	0.0075
	Wrought Aluminum	30	HPF	△ WAB	TiCN	1100	0.0075	0.0085
		180	HPF	△ WAB	TiCN	950	0.0065	0.0075
	Aluminum Bronze	100-200	HPM	-	TiCN	370	0.004	0.005
		200-250	HPM	-	TiCN	310	0.0035	0.0045
	Brass	100	BCB	-	TiN	750	0.005	0.006
Copper	60	BCB	-	TiN	510	0.002	0.0025	

*Special Geometry

- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.
- ◆ CIB (Cast Iron Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- CAB (Cast Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- △ WAB (Wrought Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

⚠ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Imperial (inch)

Feed Rate (IPR) by Diameter								
0.197 - 0.236	0.236 - 0.276	0.276 - 0.315	0.315 - 0.394	0.394 - 0.472	0.472 - 0.551	0.551 - 0.630	0.630 - 0.709	0.709 - 0.787
0.0055	0.0065	0.0075	0.009	0.0095	0.010	0.011	0.011	0.012
0.0045	0.0055	0.0065	0.008	0.0085	0.0095	0.010	0.010	0.011
0.0045	0.005	0.006	0.007	0.0075	0.008	0.009	0.0095	0.0105
0.004	0.004	0.005	0.006	0.0065	0.007	0.008	0.008	0.009
0.0045	0.005	0.006	0.007	0.007	0.0075	0.0075	0.008	0.0085
0.004	0.004	0.0045	0.0055	0.0055	0.0065	0.0065	0.007	0.007
0.002	0.003	0.003	0.004	0.005	0.0055	0.007	0.008	0.009
0.002	0.003	0.003	0.004	0.004	0.0045	0.006	0.007	0.008
0.002	0.003	0.003	0.004	0.004	0.0045	0.006	0.007	0.008
0.002	0.003	0.003	0.004	0.005	0.0055	0.007	0.008	0.009
0.002	0.003	0.003	0.004	0.004	0.0045	0.006	0.007	0.008
0.009	0.011	0.012	0.014	0.0155	0.017	0.019	0.0205	0.022
0.0085	0.01	0.0115	0.013	0.014	0.0155	0.0165	0.0185	0.021
0.008	0.009	0.011	0.012	0.013	0.014	0.015	0.017	0.019
0.008	0.009	0.011	0.012	0.013	0.014	0.015	0.017	0.019
0.0075	0.0085	0.01	0.0115	0.0125	0.0135	0.0145	0.0155	0.017
0.010	0.012	0.013	0.0155	0.0165	0.0185	0.020	0.022	0.024
0.0095	0.011	0.0125	0.0145	0.0155	0.0165	0.0175	0.0195	0.022
0.009	0.010	0.012	0.013	0.014	0.015	0.016	0.018	0.020
0.009	0.010	0.012	0.013	0.014	0.015	0.016	0.018	0.020
0.0085	0.0095	0.0115	0.0125	0.0135	0.0145	0.0155	0.0165	0.019
0.009	0.010	0.0125	0.0145	0.016	0.018	0.0195	0.020	0.022
0.0085	0.009	0.0115	0.0135	0.0155	0.017	0.0185	0.019	0.021
0.0095	0.011	0.0125	0.0145	0.017	0.0185	0.020	0.021	0.023
0.0085	0.010	0.0115	0.0135	0.0155	0.0175	0.019	0.020	0.022
0.006	0.007	0.008	0.009	0.01	0.012	0.013	0.014	0.015
0.005	0.006	0.0065	0.007	0.008	0.01	0.011	0.012	0.014
0.007	0.009	0.010	0.0115	0.0125	0.014	0.016	0.017	0.018
0.003	0.003	0.003	0.004	0.004	0.004	0.005	0.006	0.007

*Special Geometry

- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.
- ◆ CIB (Cast Iron Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- CAB (Cast Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- △ WAB (Wrought Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

▲ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Metric (mm)

ISO	Material	Hardness (BHN)	General Application Geometry	Special Geometry*	Coating	Speed (M/min)	Feed Rate (mm/rev) by Diameter	
							3.00 - 4.00	4.00 - 5.00
P	Free Machining Steel 1118, 1215, 12L14, etc.	100-150	HPM	● HPM2M	AM420	152	0.15	0.18
		150-200	HPM	● HPM2M	AM420	145	0.13	0.17
		200-250	HPS	▲ HPS2M	AM420	137	0.10	0.15
	Low Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85-125	HPM	● HPM2M	AM420	139	0.15	0.18
		125-175	HPM	● HPM2M	AM420	134	0.15	0.17
		175-225	HPM	● HPM2M	AM420	130	0.13	0.15
		225-275	HPS	▲ HPS2M	AM420	125	0.11	0.15
	Medium Carbon Steel 1030, 1040, 1050, 1527, 1151, etc.	125-175	HPM	● HPM2M	AM420	134	0.14	0.15
		175-225	HPM	● HPM2M	AM420	131	0.13	0.14
		225-275	HPS	▲ HPS2M	AM420	122	0.11	0.13
		275-325	HPS	▲ HPS2M	AM420	114	0.10	0.13
	Alloy Steel 4140, 5140, 8640, etc.	125-175	HPM	● HPM2M	AM420	123	0.14	0.15
		175-225	HPM	● HPM2M	AM420	116	0.13	0.14
		225-275	HPS	▲ HPS2M	AM420	111	0.10	0.13
		275-325	HPS	▲ HPS2M	AM420	104	0.10	0.13
		325-375	HP106	-	AM420	99	0.09	0.11
	High Strength Alloy 4340, 4330V, 300M, etc.	225-300	HPS	▲ HPS2M	AM420	104	0.10	0.13
		300-350	HPS	▲ HPS2M	AM420	98	0.10	0.13
		350-400	HP106	-	AM420	76	0.09	0.10
	Structural Steel A36, A285, A516, etc.	100-150	HPS	▲ HPS2M	AM420	137	0.14	0.17
150-250		HPS	▲ HPS2M	AM420	130	0.11	0.14	
250-350		HPS	▲ HPS2M	AM420	119	0.10	0.13	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150-200	HPM	● HPM2M	AM420	82	0.11	0.11	
	200-250	HPS	▲ HPS2M	AM420	76	0.10	0.10	
S	High Temp Alloy Hastelloy B, Inconel 600, etc.	140-220	HPS	-	AM460	34	0.08	0.08
		220-310	HPS	-	AM460	30	0.05	0.05
	Titanium Alloy	140-220	HPS	-	AM460	46	0.06	0.08
		220-310	HPS	-	AM460	37	0.05	0.06
	Aerospace Alloy S82	185-275	HPS	-	AM460	49	0.08	0.08
		275-350	HPS	-	AM460	40	0.05	0.05

*Special Geometry

- Use HPM2M for greater drill depths over 8xD. HPM2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPM.
- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Metric (mm)

Feed Rate (mm/rev) by Diameter								
5.00 - 6.00	6.00 - 7.00	7.00 - 8.00	8.00 - 10.00	10.00 - 12.00	12.00 - 14.00	14.00 - 16.00	16.00 - 18.00	18.00 - 20.00
0.20	0.23	0.25	0.30	0.33	0.38	0.43	0.46	0.51
0.19	0.22	0.24	0.28	0.30	0.36	0.41	0.43	0.48
0.18	0.20	0.23	0.25	0.28	0.33	0.38	0.41	0.46
0.20	0.23	0.25	0.30	0.34	0.37	0.42	0.44	0.50
0.19	0.22	0.24	0.29	0.33	0.36	0.41	0.43	0.48
0.18	0.20	0.23	0.28	0.32	0.34	0.38	0.41	0.46
0.18	0.20	0.23	0.25	0.30	0.33	0.38	0.41	0.46
0.18	0.19	0.23	0.28	0.30	0.33	0.37	0.41	0.44
0.15	0.18	0.22	0.27	0.29	0.32	0.36	0.39	0.43
0.15	0.18	0.22	0.27	0.28	0.32	0.34	0.37	0.42
0.14	0.17	0.20	0.25	0.28	0.30	0.33	0.36	0.41
0.17	0.19	0.22	0.27	0.29	0.33	0.37	0.41	0.43
0.15	0.18	0.20	0.25	0.28	0.32	0.36	0.39	0.42
0.15	0.17	0.20	0.24	0.27	0.30	0.34	0.37	0.39
0.14	0.15	0.19	0.23	0.25	0.29	0.33	0.36	0.38
0.13	0.14	0.18	0.23	0.25	0.28	0.32	0.34	0.37
0.15	0.17	0.20	0.24	0.27	0.30	0.34	0.37	0.39
0.14	0.15	0.19	0.23	0.25	0.29	0.33	0.36	0.38
0.11	0.14	0.17	0.20	0.22	0.25	0.28	0.30	0.33
0.18	0.20	0.24	0.30	0.33	0.36	0.39	0.41	0.47
0.15	0.18	0.20	0.27	0.30	0.30	0.34	0.36	0.41
0.14	0.17	0.19	0.24	0.27	0.29	0.32	0.34	0.38
0.13	0.15	0.18	0.24	0.25	0.28	0.32	0.33	0.38
0.11	0.14	0.17	0.22	0.23	0.25	0.29	0.30	0.36
0.09	0.10	0.11	0.14	0.15	0.17	0.18	0.19	0.22
0.08	0.09	0.09	0.11	0.13	0.15	0.17	0.17	0.19
0.09	0.10	0.11	0.15	0.15	0.18	0.19	0.20	0.23
0.08	0.09	0.10	0.13	0.14	0.15	0.18	0.18	0.20
0.09	0.10	0.10	0.11	0.14	0.15	0.17	0.18	0.20
0.08	0.09	0.09	0.10	0.11	0.14	0.15	0.15	0.18

*Special Geometry

- Use HPM2M for greater drill depths over 8xD. HPM2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPM.
- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

▲ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

A
DRILLING
B
BORING
C
REAMING
D
BURNISHING
E
THREADING
X
SPECIALS

Recommended Drilling Data | Metric (mm)

ISO	Material	Hardness (BHN)	General Application Geometry	Special Geometry	Coating	Speed (M/min)	Feed Rate (mm/rev) by Diameter	
							3.00 - 4.00	4.00 - 5.00
M	Stainless Steel 400 Series 416, 420, etc.	185-275	HPS	▲ HPS2M	AM460	76	0.10	0.11
		275-350	HPS	▲ HPS2M	AM460	59	0.09	0.10
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135-185	HPS	▲ HPS2M	AM460	61	0.09	0.10
		185-275	HPS	▲ HPS2M	AM460	53	0.08	0.09
	Super Duplex Stainless Steel	135-185	HPS	▲ HPS2M	AM460	46	0.09	0.10
185-275		HPS	▲ HPS2M	AM460	41	0.08	0.09	
H	Wear Plate Hardox, AR400, T-1, etc.	400	HP106	-	AM420	52	0.05	0.05
		500	HP106	-	AM420	43	0.05	0.05
		600	HP106	-	AM420	30	0.05	0.05
	Hardened Steel	300-400	HP106	-	AM420	52	0.05	0.05
		400-500	HP106	-	AM420	43	0.05	0.05
K	SG/Nodular Cast Iron	120-150	HPS2M	◆ CIB	AM440	152	0.20	0.22
		150-200	HPS2M	◆ CIB	AM440	148	0.18	0.19
		200-220	HPS2M	◆ CIB	AM440	143	0.15	0.18
		220-260	HPS2M	◆ CIB	AM440	139	0.15	0.18
		260-320	HPS2M	◆ CIB	AM440	127	0.13	0.17
	Gray/White Cast Iron	120-150	HPS2M	◆ CIB	AM440	166	0.23	0.24
		150-200	HPS2M	◆ CIB	AM440	162	0.20	0.22
		200-220	HPS2M	◆ CIB	AM440	157	0.18	0.20
		220-260	HPS2M	◆ CIB	AM440	145	0.18	0.20
		260-320	HPS2M	◆ CIB	AM440	137	0.15	0.19
N	Cast Aluminum	30	HPF	○ CAB	TiCN	290	0.19	0.22
		180	HPF	○ CAB	TiCN	230	0.17	0.19
	Wrought Aluminum	30	HPF	△ WAB	TiCN	335	0.19	0.22
		180	HPF	△ WAB	TiCN	290	0.17	0.19
	Aluminum Bronze	100-200	HPM	-	TiCN	113	0.10	0.13
		200-250	HPM	-	TiCN	95	0.09	0.11
	Brass	100	BCB	-	TiN	229	0.13	0.15
Copper	60	BCB	-	TiN	155	0.05	0.06	

*Special Geometry

▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.

◆ CIB (Cast Iron Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.

NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

○ CAB (Cast Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.

NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

△ WAB (Wrought Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.

NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation

Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

⚠ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Recommended Drilling Data | Metric (mm)

Feed Rate (mm/rev) by Diameter								
5.00 - 6.00	6.00 - 7.00	7.00 - 8.00	8.00 - 10.00	10.00 - 12.00	12.00 - 14.00	14.00 - 16.00	16.00 - 18.00	18.00 - 20.00
0.14	0.17	0.19	0.23	0.24	0.25	0.28	0.28	0.30
0.11	0.14	0.17	0.20	0.22	0.24	0.25	0.25	0.28
0.11	0.13	0.15	0.18	0.19	0.20	0.23	0.24	0.27
0.10	0.10	0.13	0.15	0.17	0.18	0.20	0.20	0.23
0.11	0.13	0.15	0.18	0.18	0.19	0.19	0.20	0.22
0.10	0.10	0.11	0.14	0.14	0.17	0.17	0.18	0.18
0.05	0.08	0.08	0.10	0.13	0.14	0.18	0.20	0.23
0.05	0.08	0.08	0.10	0.10	0.11	0.15	0.18	0.20
0.05	0.08	0.08	0.10	0.10	0.11	0.15	0.18	0.20
0.05	0.08	0.08	0.10	0.13	0.14	0.18	0.20	0.23
0.05	0.08	0.08	0.10	0.10	0.11	0.15	0.18	0.20
0.23	0.28	0.30	0.36	0.39	0.43	0.47	0.52	0.56
0.22	0.25	0.29	0.33	0.36	0.39	0.42	0.47	0.53
0.20	0.23	0.28	0.30	0.33	0.36	0.38	0.43	0.47
0.20	0.23	0.28	0.30	0.33	0.36	0.38	0.43	0.47
0.19	0.22	0.25	0.29	0.32	0.34	0.37	0.39	0.43
0.25	0.30	0.33	0.39	0.42	0.47	0.51	0.56	0.61
0.24	0.28	0.32	0.37	0.39	0.42	0.44	0.50	0.56
0.23	0.25	0.30	0.33	0.36	0.38	0.41	0.46	0.51
0.23	0.25	0.30	0.33	0.36	0.38	0.41	0.46	0.51
0.22	0.24	0.29	0.32	0.34	0.37	0.39	0.42	0.48
0.23	0.25	0.32	0.37	0.41	0.46	0.50	0.51	0.56
0.22	0.23	0.29	0.34	0.39	0.43	0.47	0.48	0.53
0.24	0.28	0.32	0.37	0.43	0.47	0.51	0.53	0.58
0.22	0.25	0.29	0.34	0.39	0.44	0.48	0.51	0.56
0.15	0.18	0.20	0.23	0.25	0.30	0.33	0.36	0.38
0.13	0.15	0.17	0.18	0.20	0.25	0.28	0.30	0.36
0.18	0.23	0.25	0.29	0.32	0.36	0.41	0.43	0.46
0.08	0.08	0.08	0.10	0.10	0.10	0.13	0.15	0.18

*Special Geometry

- ▲ Use HPS2M for greater drill depths over 8xD. HPS2M is used for any interruptions and produces a better hole tolerance and finish in comparison to HPS.
- ◆ CIB (Cast Iron Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- CAB (Cast Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.
- △ WAB (Wrought Aluminum Burnish): Unique point, web, and cutting edge designed to significantly improve hole finish and hole tolerance.
NOTE: Reduce speed and feed parameters above from 40% - 50% reduction.

Parameter Reductions for Length to Diameter Relationships

6xD	0.90 reduction for speed and feed adjustment
▲ 9xD	0.80 reduction for speed and feed adjustment
▲ 12xD	0.70 reduction for speed and feed adjustment
▲ 15xD - 20xD	0.60 reduction for speed and feed adjustment

Flood Coolant Applications

Recommend if diameter to depth is less than or equal to three times the diameter. Reduce speed by 20% and if needed drop feed by 10% to maintain optimal chip formation



Parameter Recommendations for Step Drills

- Feed rate is based off the pilot diameter
- Speed rate is based off the largest step diameter

▲ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

IMPORTANT: The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is also available through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

Coolant Recommendations

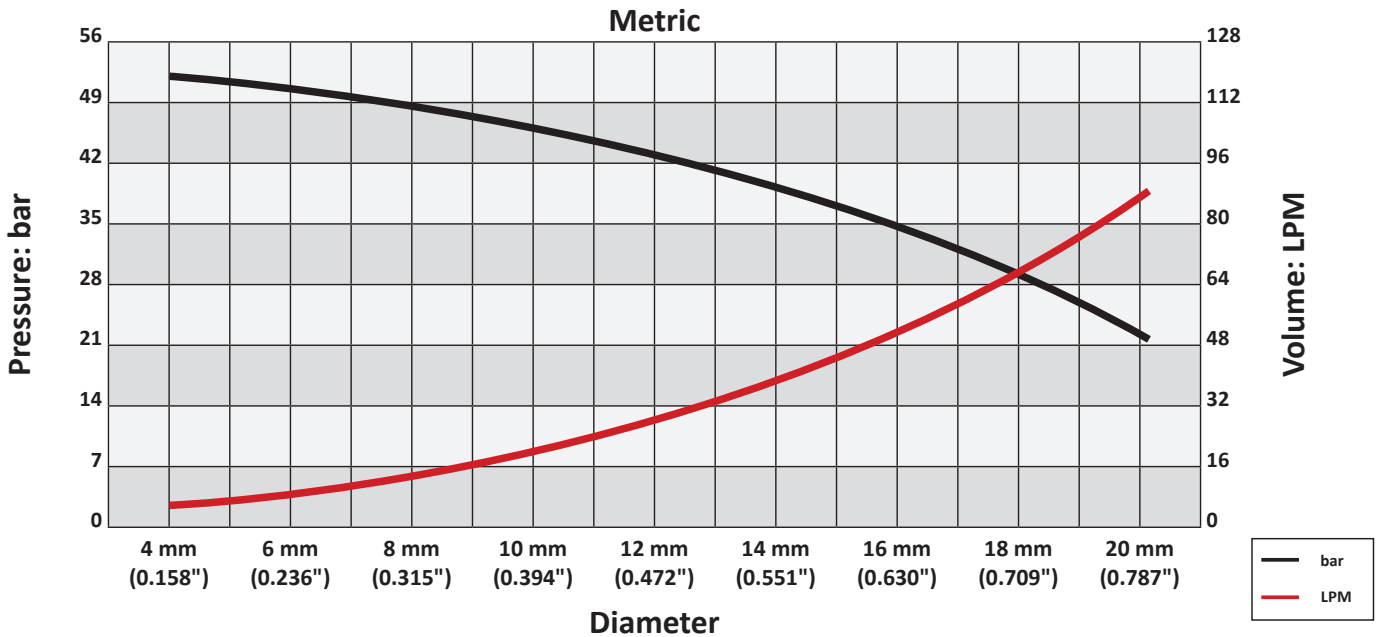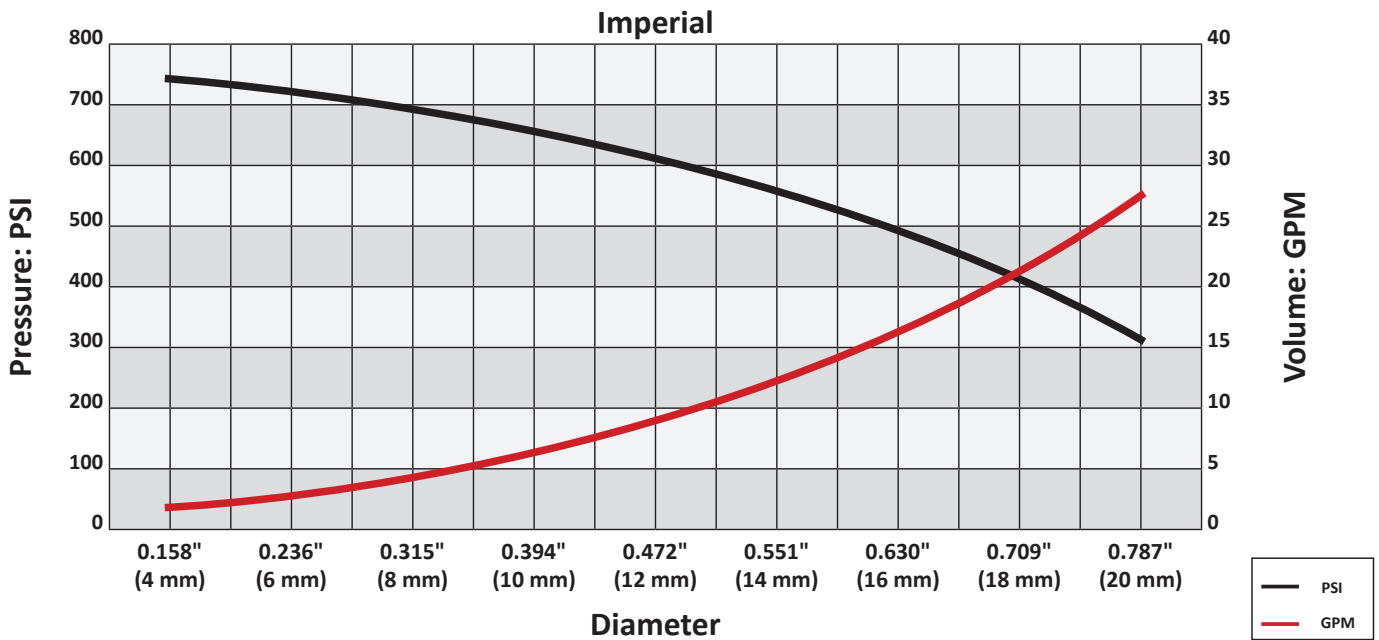

Coolant Adjustment

Drill Length	Pressure and Flow Multiplier
Up to 6xD	See above chart
>6 - 9xD	1.2
▲ >9 - 12xD	1.4
▲ >12 - 15xD	1.6
▲ >15 - 20xD	2

Coolant Recommendation Example | Imperial

If the recommended coolant pressure and flow is 600 PSI and 12 GPM for a 3xD tool, the adjusted pressure and flow for a 9xD tool would be:

$600 \times 1.2 = 720 \text{ PSI}$	$12 \times 1.2 = 14.4 \text{ GPM}$
------------------------------------	------------------------------------

Coolant Recommendation Example | Metric

If the recommended coolant pressure and flow is 42 bar and 32 LPM for a 3xD tool, the adjusted pressure and flow for a 9xD tool would be:









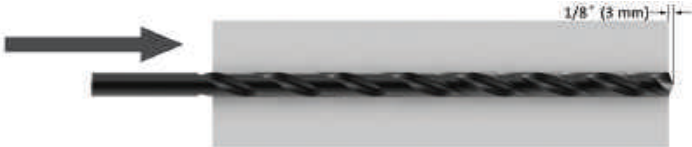



$42 \times 1.2 = 50.4 \text{ bar}$	$32 \times 1.2 = 38.4 \text{ LPM}$
------------------------------------	------------------------------------

⚠ WARNING Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A15: 17 for deep hole drilling guidelines in this section of the catalog. Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team. ext: 7611 | email: appeng@alliedmachine.com

NOTES:

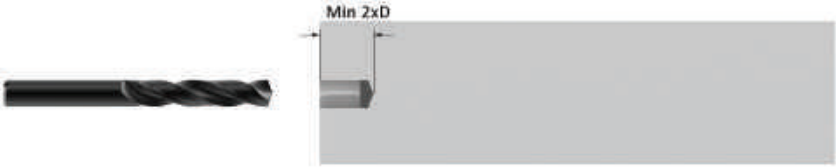- Coolant must have proper additives to prevent excessive foaming during drilling cycle.
- Positive displacement coolant pump is recommended to maintain coolant flow at recommended values.
- The coolant filter must be less than 5 microns. Fine filtration is necessary to prevent blockage of the smaller coolant holes of the solid carbide tool.

Deep Hole Drilling Guidelines

<p>1. Pilot Hole 100% RPM 100% IPR (mm/rev)</p>	<p>Establish the pilot hole using the same diameter short drill to a depth of 2xD minimum. Utilize a pilot drill with the same or larger included point angle.</p>	 <p>Coolant ON</p> 
<p>⚠ 2. Feed-in 50 RPM max 12 IPM (300 mm/min)</p>	<p>Feed the longer drill within 1/16" (1.5 mm) short of the established pilot hole bottom at a maximum of 50 RPM and 12 IPM (300 mm/min) feed rate.</p>	 <p>Coolant OFF</p> 
<p>3. Deep Hole Transition Drilling 50% RPM 75% IPR (mm/rev)</p>	<p>Drill additional 1xD past the bottom of the pilot hole at 50% reduction of recommended speed and 25% reduction of recommended feed. Minimum of one second dwell is required to meet full speed before feeding.</p>	 <p>Coolant ON</p> 
<p>4. Deep Hole Drilling - Blind 100% RPM 100% IPR (mm/rev)</p>	<p>Drill to full depth at recommended speed and feed for longer drill according to Allied speed and feed charts. No peck cycle recommended.</p>	 <p>Coolant ON</p> 
<p>5. Deep Hole Drilling - at Breakout 50% RPM 75% IPR (mm/rev)</p>	<p>For through holes only: Reduce speed by 50% and feed by 25% prior to breakout. Do not breakout more than 1/8" (3mm) past the full diameter of the drill.</p>	 <p>Coolant ON</p> 
<p>⚠ 6. Drill Retract 50 RPM max</p>	<p>Reduce speed to a maximum of 50 RPM before retracting from the hole.</p>	 <p>Coolant OFF</p> 

⚠ WARNING Tool failure can cause serious injury. To prevent:

- When using Superior drills greater than 9xD without support bushing, use a short Superior drill to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate drills more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit www.alliedmachine.com/DeepHoleGuidelines for the most up-to-date information and procedures.

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Troubleshooting Guide

Problem	Condition	Shorten Flute Length	Increase		Decrease		Increase		Use Through Tool Coolant ^B	Change Point Angle	Align / Repair Spindle
			Feed Rate ^G	Speed ^G	Feed Rate ^{A,G}	Speed ^G	Coolant Pressure	Coolant Flow			
Decrease Tool Life	Lack of Drill Rigidity	○									
	Improper Cutting Parameters		●		●	●					
	Excessive Margin Wear					●	○	○	○		●
	Cutting Edge Chipping				●						●
	Chattering/Vibration	○	●			○					●
	Built-up Edge ^D					●	○	○	●		
	Chipping of Point				●	●				○	●
Poor Chip Evacuation ^C	Long Chips		●			●	○	○			
	Chip Packing				●	●	●	○	●		
	Blue Chips				●	●	●	●	●		
Hole Form	Workpiece Deflection				●					○	
	Bell Mouth	○	●			●				○	
	Oversized Hole	○		●	●						●
	Undersized Hole		●			●	●	●			
	Hole Leadoff	○			●	○				○	●
Performance	Workpiece Burning				●	●	●	●	●		
	Tool Deflection	○			●	●				○	●
	Harder Materials				●	●			●		
	Retract Spiral	●			●	●					●
	Exit Burr			●	●					○	

●: Primary solution
○: Secondary solution

- A:** Do not reduce feed rates below threshold of good chip form
- B:** Run coolant through tool when drilling greater than 3xD.
- C:** Add peck cycle to help clear chips
- D:** Ensure coolant quality with regular maintenance free of swarf
- G:** Refer to speed and feed chart

IMPORTANT: Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com

A DRILLING
B BORING
C REAMING
D BURNISHING
E THREADING
X SPECIALS

Troubleshooting Guide

Problem	Condition	Different Coating	Different Geometry	Tool Clamping	Workpiece Fixturing	Regrind/Recondition	Check Tool Diameter	Entry Speed & Feed ^E	TIR Verification ^F	Exit Speed & Feed
Decrease Tool Life	Lack of Drill Rigidity			●	●					
	Improper Cutting Parameters									
	Excessive Margin Wear	○		●	●	○				
	Cutting Edge Chipping		○	●	●	○				
	Chattering/Vibration			●	●					
	Built up Edge ^D	○	○							
	Chipping of Point		○	●	●	○				
Poor Chip Evacuation ^C	Long Chips		○							
	Chip Packing		○							
	Blue Chips									
Hole Form	Workpiece Deflection		○		●					
	Bell Mouth			●	●			●		
	Oversized Hole			●	●	○			●	
	Undersized Hole					●	●		●	
	Hole Lead Off		○	●	●	○		●	●	
Performance	Workpiece Burning									
	Tool Deflection		○	●	●			●	○	
	Harder Materials	○	○							
	Retract Spiral		○	●					●	●
	Exit Burr		○							

●: Primary solution
○: Secondary solution

- C:** Add peck cycle to help clear chips
- D:** Ensure coolant quality with regular maintenance free of swarf
- E:** Reduce entry speed and feed parameters 20%
- F:** TIR range of 0.000"-0.001" (prefer 0.0000"-0.0005")

Speed and Feed Reduction Table		
Interruptions:		
Condition	Reduction Speed	Reduction Feed
Small Cross Hole (C.H)	0.90	0.85
Large Cross Hole(C.H)	0.75	0.70
Incline Angle Entry(I.A)	0.80	0.75
I.A + C.H	0.70	0.65
Coolant Type:		
Condition	Reduction Speed	Reduction Feed
**Flood	See Note	See Note
Dry	0.50	0.50
Mist	0.70	0.85
Machine:		
Machine Type	Reduction Speed	Reduction Feed
Lathe	0.90	0.85
Depth Ratio:		
Condition	Reduction Speed	Reduction Feed
6xD	0.90	0.90
9xD	0.80	0.80
12xD	0.70	0.70
15-20xD	0.60	0.60
Example: If the recommended speed and feed is 365 SFM and 0.010 IPR for a 0.276" - 0.315" diameter drill at 12xD, the speed and feed would be 255 SFM & 0.007 IPR. $365 \text{ SFM} \times 0.70 = 255 \text{ SFM}$ $0.010 \text{ IPR} \times 0.70 = 0.007 \text{ IPR}$		
**Flood coolant applications: Recommend if diameter to depth is less than or equal to 3xD. Reduce speed by 20% and if needed, drop feed by 10% to maintain optimal chip formation.		

IMPORTANT: Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com

A DRILLING
B BORING
C REAMING
D BURNISHING
E THREADING
X SPECIALS



Please email the completed form to:
your local FSE (if applicable) or appeng@alliedmachine.com.

Please include any prints for the part (specify the feature) and/
or tool for this project. More information will help ensure proper
tooling for this quote.

**LOGIN TO DOWNLOAD AND
COMPLETE THIS FORM OFFLINE:
alliedmachine.com/SuperionQuoteForm**

Name	
FSE (if applicable)	

Please fill in the fields below completely for a quote to be processed.

Distributor Information

Company Name: _____
 Contact: _____
 Account Number: _____
 Phone: _____
 Email: _____

End User Information

Company Name: _____
 Contact: _____
 Industry: _____
 Phone: _____
 Email: _____

Superion Objective What issue(s) are we solving? (i.e. penetration rate, finish, tool life, hole size, etc.)

Application Information

Hole Diameter: _____ in/mm	Tolerance: _____	Material: _____ (4150 / A36 / Cast Iron / etc.)
Pre-existing Diameter: _____ in/mm	Depth of Cut: _____ in/mm	Hardness: _____ (BHN / Rc)
Required Finish: _____ RMS	State: _____ (Casting / Hot rolled / Forging)	

Machine Information

Machine Type: _____ (Lathe / Screw machine / Machine center / etc.)	Builder: _____ (Haas, Mori Seiki, etc.)	Model #: _____
Shank Required: _____ (Cylindrical / Whistle Notch / Tang / etc.)		Power: _____ HP/KW
Rigidity: _____ <input type="checkbox"/> Excellent <input type="checkbox"/> Good <input type="checkbox"/> Poor	Orientation: _____ <input type="checkbox"/> Vertical <input type="checkbox"/> Horizontal	Tool Rotating: _____ <input type="checkbox"/> Yes <input type="checkbox"/> No
		Thrust: _____ lbs/N

Coolant Information

Coolant Delivery: _____ (Through tool/Flood)	Coolant Pressure: _____ PSI / bar
Coolant Type: _____ (Air mist, oil, synthetic, water soluble, etc.)	Coolant Volume: _____ GPM / LPM

Current Process Is this a new project? Yes ___ No ___ (If selected no, please fill the box out below)

Current Tooling: _____ (Manufacturer / Item Number)	Current Tool Life: _____ Holes _____ Parts _____ Inches
Current Speeds and Feeds: _____	Current Coating/Substrate: _____

Notes: _____

Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine & Engineering
is registered to
ISO 9001:2015 by DQS



Wohlhaupter GmbH
is registered to
ISO 9001:2015 by QA TECHNICH

United States

Allied Machine & Engineering

120 Deeds Drive
Dover OH 44622
United States

Phone:
+1.330.343.4283

Fax:
+1.330.602.3400

Toll Free USA and Canada:
800.321.5537

Toll Free USA and Canada:
800.223.5140

Allied Machine & Engineering

485 W Third Street
Dover OH 44622
United States

Phone:
+1.330.343.4283

Fax:
+1.330.364.7666
(Engineering Dept.)

Toll Free USA and Canada:
800.321.5537

Europe

Allied Machine & Engineering Co. (Europe) Ltd.

93 Vantage Point
Pensnett Estate
Kingswinford
West Midlands
DY6 7FR England

Phone:
+44 (0) 1384.400900

Wohlhaupter GmbH

Maybachstrasse 4
Postfach 1264
72636 Frickenhausen
Germany

Phone:
+49 (0) 7022.408.0

Fax:
+49 (0) 7022.408.212

Asia

Wohlhaupter India Pvt. Ltd.

B-23, 3rd Floor
B Block Community Centre
Janakpuri, New Delhi - 110058
India

Phone:
+91 (0) 11.41827044

Your local Allied Machine representative:

www.alliedmachine.com

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS
Wohlhaupter GmbH is registered to **ISO 9001:2015** by QTA TECHNIC



Copyright © 2021 Allied Machine & Engineering Corp. All rights reserved.
All trademarks designated with the ® symbol are registered in the United States and other countries.
Literature Order Number: A15-SUP
Publish Date: May 2021