



**ALLIED MACHINE
& ENGINEERING**

WOHLHAUPTER®

Holemaking Solutions for Today's Manufacturing



Drilling



Boring



Burnishing



Threading



ALVAN® Reamers

► **REAMING**

Finishing Solutions by S.C.A.M.I.



Specials

S.C.A.M.I.®

SECTION

C

Reaming

ALVAN® Reamers

Replaceable Head Style | Monobloc Style | Cutting Ring Style



S.C.A.M.I.®

Every Option for Every Application

Allied Machine & Engineering is pleased to offer ALVAN® Reamers through an exclusive supply agreement with S.C.A.M.I. s.n.c., an Italian manufacturer that provides high-quality cutting tools.

In addition to producing close tolerances and dimensional accuracy of machined holes, these high performance reaming products provide lower costs per hole through high-penetration rates, making them the ideal choice for finishing holes in a production environment. It can also prove to be an alternative to finish boring by providing more consistent hole sizes and lower cycle times.

Excellent hole tolerances

Improves hole quality and surface finish

Expandable design accommodates for wear

Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General Machining



Oil & Gas



Renewable Energy

Your safety and the safety of others is very important. This catalogue contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalogue, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalogue. Safety messages follow these words.

WARNING

WARNING (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

NOTICE means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

NOTE and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit www.alliedmachine.com for the most up-to-date information and procedures.


Reference Icons

The following icons will appear throughout the catalogue to help you navigate between products.




Setup / Assembly Information

Detailed instructions and information regarding the corresponding part(s)




Recommended Cutting Data

Speed and feed recommendations for optimum and safe reaming




Replaceable Reamer Heads

Refers to the reamer head options that connect to the reamer mandrels




Replaceable Reamer Screws

Refers to the reamer head screw options that connect the head to the reamer mandrels




Replaceable Reamer Mandrels

Refers to the reamer mandrel options that connect with the head and screw




Cutting Rings

Refers to the available cutting ring options



Cutting Ring Mandrels

Refers to the reamer mandrel options that connect with the cutting ring



Modular Connection Shanks

Refers to Cerit modular shanks that can connect with reamers



Through Coolant Option

Indicates that the product is coolant through

S.C.A.M.I.®

Allied Machine & Engineering offers ALVAN® Reamers through an exclusive supply agreement with S.C.A.M.I. s.n.c.

S.C.A.M.I. is an Italian manufacturer that has been producing high-quality cutting tools for over 40 years. In addition to producing close tolerances and dimensional accuracy of machined holes, this high-performance reaming product provides a lower cost per hole through its high penetration rates. This makes the ALVAN Reamer product line an ideal choice for finishing holes in a production environment. It can also prove to be an alternative to finish boring by providing more consistent hole sizes and lower cycle times.

For additional information about all Allied Machine products, visit www.alliedmachine.com. For technical assistance, contact our Application Engineering department.
email: appeng@alliedmachine.com

Introduction Information

Case Study Example	2
Reconditioning Service	3
Reaming Overview and Selection	4 - 7
Lead-ins, Coatings, Materials, and Dimples	8 - 9

Replaceable Head Reamers

Product Overview	10
Product Nomenclature	11
7000 Series	12 - 19
9000 Series	20 - 23
5000 Series	24 - 26

Monobloc Reamers	28 - 35
----------------------------	---------

Ring Style Reamers	36 - 59
------------------------------	---------

Shanks and Adapters	60 - 67
-------------------------------	---------

Recommended Cutting Data

	Replaceable Head Style	
	7000 Series	68 - 69
	9000 Series	70 - 71
	5000 Series	72 - 73
	Monobloc Style	74 - 75
	Cutting Ring Style	76 - 77
	Replaceable Head Style	
	7000 Series	78 - 79
	9000 Series	80 - 81
	5000 Series	82 - 83
	Monobloc Style	84 - 85
	Cutting Ring Style	86 - 87

Technical Information

Setup

7000 Series	88
9000 Series	89
5000 Series	90
Monobloc Style	91
Cutting Ring Style	92

Diameter Measurement	93
--------------------------------	----

TIR Measurement and Adjustment	94 - 95
--	---------

Troubleshooting Guide	96
---------------------------------	----



Case Study Example

CASE STUDY

Project Profile: Grey Cast Iron Hydraulic Transmission Component

Tooling Solution: ALVAN® Reamer - Monobloc Style

The Problem:

Previously, the customer was using a competitor boring tool running at the following parameters:

- 3802 RPM
- 152 m/min (500 SFM)
- 0.076 mm/rev (0.003 IPR)
- 290 mm/min (11.41 IPM)

With two passes, the tool made a 12.758 mm (0.5023") diameter hole to a 30.48 mm (1.20") depth.

- Cycle time = 12.6 seconds
- Tool life = 75 parts

Seeking to streamline the production process, the customer needed to increase tool life and lower the cost of production.

The Solution:

Allied Machine recommended the ALVAN® monobloc style reamer.

- **Reamer** = 92440 series carbide, uncoated, V lead

The tool ran at the following parameters:

- 2200 RPM
- 88 m/min (289 SFM)
- 0.48 mm/rev (0.019 IPR)
- 1061 mm/min (41.80 IPM)

The tool achieved the desired diameter and depth, and the results achieved the customer's goals.

- Cycle time = 1.7 seconds
- Tool life = 3,176 parts

The Advantages:

The customer was able to lower the cost of production and increase the tool life.

- Reduced cycle time *from 12.6 seconds to 1.7 seconds*
- Increased tool life *from 75 parts to an incredible 3,176 parts*
- Total cost savings = **£2,139/€2,436 (or 52%)**




The **PROOF** is in the
NUMBERS

Tool Life: Competitor Boring
(number of parts = 75)



Tool Life: ALVAN® Monobloc Style Reamer
(number of parts = 3,176)

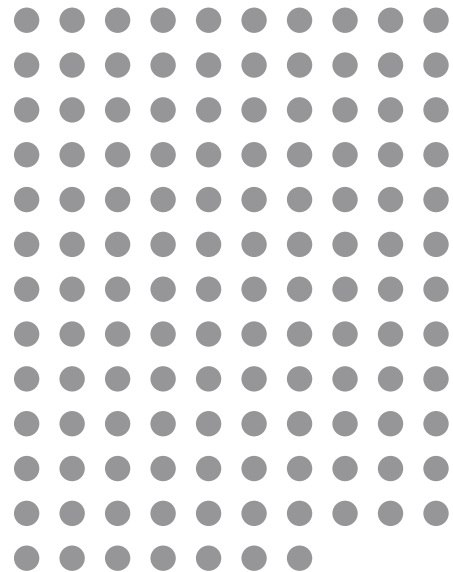

Overall **SAVINGS** of
52%




PREMIUM SOLUTION



Reconditioning Service

All ALVAN Reamers can be reconditioned to help reduce your overall tooling costs. This service is provided through Allied Machine & Engineering by utilising the expertise of S.C.A.M.I. We will process the tools with a 25-35 work day lead time, depending on the style, the date we receive the tools, and the purchase order.

Reamer Style	Lead Time (work days)	Part No.	Reconditioned Part No.
 Replaceable Head*	25	7405-SVG-025400 (+tolerance)	Regrind: RS-7405-SVG-025400 (+tolerance) Rebraz: RP-7405-SVG-025400 (+tolerance)
 Monobloc	35	3620-KNG-010000+003-003	Regrind: RS-3620-KNG-010000+003-003 Rebraz: RP-3620-KNG-010000+003-003
 Cutting Ring	35	2AVC-STG-040000+003-003	Regrind: RS-2AVC-STG-040000+003-003 Rebraz: RP-2AVC-STG-040000+003-003

*Only 7000 series heads are eligible for reconditioning.



Reaming Overview

A
DRILLING

B
BORING

C
REAMING

D
BURNISHING

E
THREADING

X
SPECIALS

REAMER STYLES

**Replaceable Head**
Pages C: 10 - 26

- Diameter range: 9.600 mm - 80.600 mm.
- Heads are available as fixed or expanding for improved productivity.
- Straight, left-hand, or right-hand helical flutes provide solutions for both through and blind holes.
- Cylindrical or modular shanks improve concentricity.

**Monobloc**
Pages C: 28 - 35

- Diameter range: 5.800 mm - 32.100 mm.
- Available with central or radial through coolant.
- Can be used for through or blind holes.
- Cylindrical shanks improve concentricity.
- Expandable to accommodate for wear.


**Cutting Ring**
Pages C: 36 - 59

- Diameter range: 17.600 mm - 200.600 mm.
- The cutting edges are positioned asymmetrically to assure the best roundness of the hole.
- Holes with tight tolerances can be accommodated, and the expansion ensures a perfect holding of the reaming diameter.

General Reaming Notes

- If the depth is over 9xD, use a short length reamer to pilot the hole. Then finish with the longer length ⚠.
- For blind hole applications, always use central coolant. If in doubt, contact Allied's Application Engineering department.
- More stock allowance can be taken in softer materials. Less stock allowance should be taken in harder materials.
- A common practice is to rapid out of the cut on through holes and to breakout only 2 mm past the reaming depth.

IMPORTANT: Always use Molykote® (anti-seize applicator) on the conical seat and the threads on the central screw for assembly.

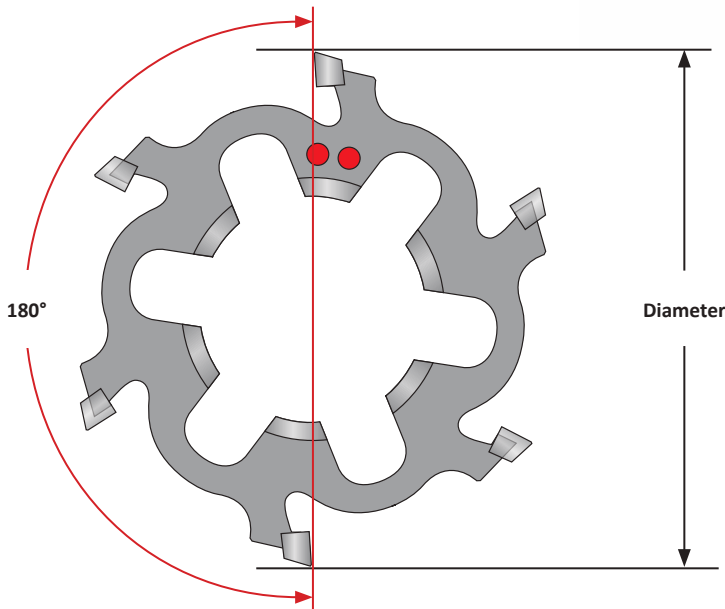

NOTE: The position of the dimples indicates which two cutting teeth are 180° opposed. Diameter measurements should be taken from these two cutting teeth.

⚠ WARNING Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a shorter reamer to establish the initial hole diameter that is a minimum of 2 diameters deep.
- Do not rotate reamers more than 50 RPM unless they are engaged with the workpiece or fixture.

Factory technical assistance is available for your specific applications through our Application Engineering Team. email: engineering.eu@alliedmachine.com

Quick Selection Guide

Breakdown by Diameter

Reamer Style	10.00 mm 0.3937"	30.00 mm 1.1811"	50.00 mm 1.9685"	70.00 mm 2.7559"	90.00 mm 3.5433"	110.00 mm 4.3307"	130.00 mm 5.1181"	150.00 mm 5.9055"	170.00 mm 6.6929"	190.00 mm 7.4803"	210.00 mm 8.2677"
Replaceable Head	5000 Series (Expandable) 9.600 mm - 32.600 mm (0.3780" - 1.2835")										
	7000 Series (Expandable) 11.800 mm - 60.609 mm (0.4646" - 2.3862")										
	7000 Series (Fixed) 11.800 mm - 60.609 mm (0.4646" - 2.3862")										
	9000 Series (Fixed) 11.800 mm - 40.600 mm (0.4646" - 1.5984")										
Monobloc 5.800 mm - 32.100 mm (0.2283" - 1.2638")											
Cutting Ring 32.600 mm - 200.600 mm (1.2835" - 7.8976")											

► Any product line with a black arrow indicates that non-standard diameters can be ordered by contacting Application Engineering.

Breakdown by Features

Reamer Style	Capable Tolerance	Fastest Setup	Replaceable Cutting Head	Expandable to Adjust for Wear	Recondition Available	Cylindrical Shanks	Modular Shanks	Through Coolant Options
Replaceable Head	 5000 Series (expandable)	H6	☒	☒	☒	☒	☒	☒
	 7000 Series (expandable)	H6	☒	☒	☒	☒	☒	☒
	 7000 Series (fixed)	H7	☒		☒	☒	☒	☒
	 9000 Series (fixed)	H7	☒			☒	☒	☒
 Monobloc	H6			☒	☒	☒		☒
 Cutting Ring	H6		☒	☒	☒	☒	☒	☒

For more details on how to select a reamer, see the following pages.



How the Reamer Works

A

How the Reamer Works

- The cut is made in the lead-in zone (3), and the chip is made on the cutting face (1). The chip is removed by coolant.
- The lead-in (3) is defined depending on the application, the workpiece material, and the stock allowance.
- The radial land (2) is important for holding a good alignment, improving the surface roughness, and giving an effect similar to burnishing. The dimension of the radial land depends on the diameter.
- The radial land (2) is manufactured to be tapered on the rear.
- Fixed reamers are manufactured at the exact tapered value. Expandable reamers must be adjusted to the exact diameter. Both are already supplied at the nominal diameter by the manufacturer.
- The undercut of the cutting edge (5) avoids retract marks on the piece when the reamer is retracted from the cut.
- The front of the cutting edge (6) does not cut; if this feature is needed, a frontal lead must be supplied.

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING

X


SPECIALS

When to Apply a Reamer

- When the requested tolerance on diameter is IT8 or less
- When the requested finish is 1.6 μm (63 μin) Ra or greater
- When the critical geometry characteristics of the hole are the roundness and straightness
- When parts are being mass produced
- When the parts are large and expensive

Elements of the Cutting Tooth

- (1) Cutting Face
- (2) Radial Land
- (3) Lead-in / Primary Face / Secondary Face
- (4) Rear Face
- (5) Undercut of Cutting Edge
- (6) Front of Cutting Edge

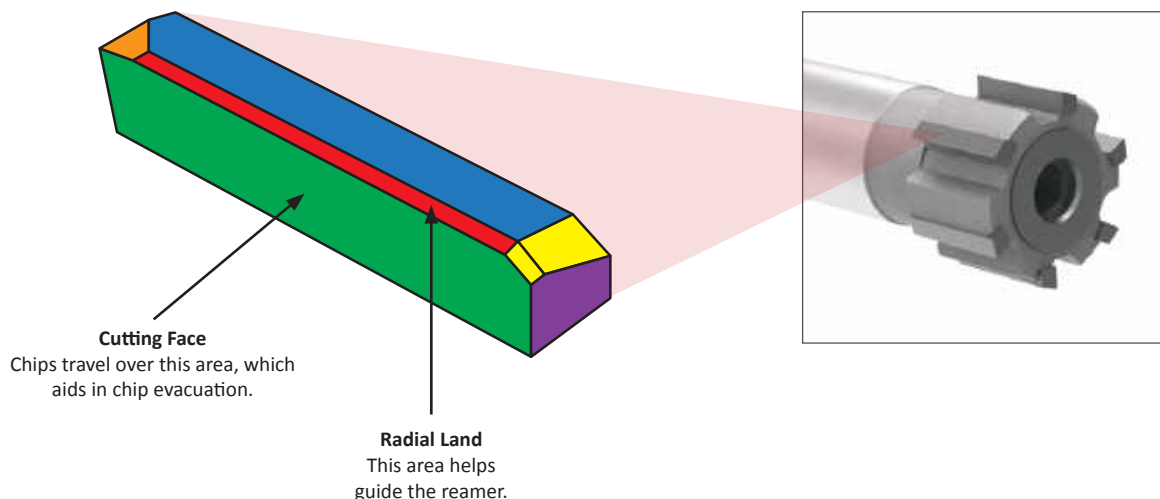

Reamer Recommendation Guide




ISO	Material	Hardness (BHN)	Through Hole				Blind Hole			
			Uninterrupted		Interrupted		Uninterrupted		Interrupted	
			Lead	Substrate & Coating	Lead	Substrate & Coating	Lead	Substrate & Coating	Lead	Substrate & Coating
P	Free-Machining Steel 1118, 1215, 12L14, etc.	<150	N or E	Cermet Uncoated	E	Cermet Uncoated	K	Cermet Uncoated	V	Cermet Uncoated
		150+								
	Low-Carbon Steel 1010, 1020, 1522, 1144, etc.	<250	N or E	Cermet Uncoated	E	Cermet Uncoated	K	Cermet Uncoated	V	Cermet Uncoated
	Medium-Carbon Steel 1030, 1040, 1050, 1140, 1151, etc.	<300	N or E	Cermet Uncoated	E	Cermet Uncoated	K*	Cermet Uncoated	V	Cermet Uncoated
	Alloy Steel 4140, 5140, 8640, etc.	<350	G or M*	Cermet Uncoated	M*	Cermet Uncoated	K*	Cermet Uncoated	G*	Cermet Uncoated
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	G or M*	Carbide Alcrona	M*	Carbide Alcrona	K*	Carbide Alcrona	G*	Carbide Alcrona
	Structural Steel	–	E	Cermet	M	Carbide TiAlN	K	Cermet	G	Carbide TiAlN
S	Tool Steel	–	M*	Carbide TiAlN	M*	Carbide TiAlN	K*	Carbide TiAlN	G*	Carbide TiAlN
	High-Temp Alloy	–	G*	Carbide TiAlN	G*	Carbide TiAlN	K*	Carbide TiAlN	G*	Carbide TiAlN
M	Titanium Alloys	–	T	Carbide TiAlN	T	Carbide TiAlN	T	Carbide TiAlN	T	Carbide TiAlN
	Austenitic Stainless Steel 304, 316, etc.	–	E	Carbide Alcrona	E	Carbide Alcrona	K	Carbide Alcrona	G*	Carbide Alcrona
K	Ferritic Martensitic Stainless Steel 416, 420, 17-4PH, 15-5PH, etc.	–	N or E	Cermet or Carbide Alcrona	E	Cermet or Carbide Alcrona	K	Cermet or Carbide Alcrona	G	Cermet or Carbide Alcrona
	Ductile Cast Iron Spheroidal - GS500	<130	V	Carbide Alcrona	V	Carbide Alcrona	K	Carbide Alcrona	V	Carbide Alcrona
N		130+		Cermet Alcrona		Cermet Alcrona		Cermet Alcrona		Cermet Alcrona
	Grey Cast Iron GC15 - GC20 - GC25 - GC35	–	V	Carbide TiAlN	V	Carbide TiAlN	K	Carbide TiAlN	V	Carbide TiAlN
N	Bronze Brass Copper	<300	E	Carbide Uncoated	E	Carbide Uncoated	K	Carbide Uncoated	G	Carbide Uncoated
	Aluminium	< 7% Si	V	Carbide Uncoated	V	Carbide Uncoated	V	Carbide Uncoated	G	Carbide Uncoated
		7% Si+	G	PCD Uncoated	G	PCD Uncoated	G	PCD Uncoated		PCD Uncoated


*Contact our Application Engineering department for special geometries to improve tool life.



Lead-in Angle Information






Straight Flute


Lead-in	Angles	Chip Evacuation	Description
A			Lead-in can be used to improve finish.
F			Can be used for stock removal at the bottom of the hole. Reduce the feed by 40% of the values on the recommended cutting data pages.
G			Standard and suitable for most materials.
L			May provide improved straightness. Reduce the feed by 40% of the values on the recommended cutting data pages.
N			Ideal for through holes. It is possible to increase the feed up to 100% of the values on the recommended cutting data pages.
T			Suitable for titanium based alloys.
V			Suitable for most materials and increases tool life.
K			Excellent at breaking small chips that are easy to evacuate in blind hole applications. Requires 50% increased feed rate, which will result in reduced tool life when compared to other leads.



Straight


Helical Flute (Right-Hand) - Blind Hole Applications Only


Lead-in	Angles	Chip Evacuation	Description
E			Standard and suitable for most materials.
M			May provide better penetration rates in steels over 200 BHN.
K			Excellent at breaking small chips that are easy to evacuate in blind hole applications. Requires 50% increased feed rate, which will result in reduced tool life when compared to other leads.



Helical

Helical Flute (Left-Hand) - Through Hole Applications Only






Lead-in	Angles	Chip Evacuation	Description
E			Standard and suitable for most materials. NOTE: Through hole applications only.
M			May provide better penetration rates in steels over 200 BHN. NOTE: Through hole applications only.



Helical

Coatings, Cutting Materials, and Dimple Indicators



Coating Information

			
Uncoated Ideal for nonferrous applications	TiN (N) Ideal for general purpose applications	TiAlN (A) Provides higher heat resistance to improve tool life	TiCN (C) Provides improved surface finish
			
Alcrona (K) Provides excellent wear resistance and can help increase cutting speeds	Hardcut (H) Ideal for cast iron and hardened steel applications	R Coating (R) Improved tool life in cast iron materials	T Coating (T) Optimised tool life in titanium and very hard materials

Cutting Material Information

Material	Indicator	Details
Carbide	K	A fine-grain carbide suitable for all conventional reaming applications. Recommended where rigidity is not excellent and speeds must be reduced.
Cermet	S	Cermet provides high wear resistance and is recommended for abrasive and increased speed applications. Not recommended for poor rigidity or interrupted cuts.

Dimple Indicators

Material	Replaceable Head Style		Monobloc Style	Cutting Ring Style
	9000 Series	7000 and 5000 Series		
Carbide	Chamfered Profile 	Two Dimples 	Two Dimples 	Two Dimples 
	Sharp Edge Profile 	Two Dimples with Line 	Two Dimples with Line 	Two Dimples with Line 
Cermet	Chamfered Profile 	Two Dimples 	Two Dimples 	Two Dimples 
	Sharp Edge Profile 	Two Dimples with Line 	Two Dimples with Line 	Two Dimples with Line

NOTE: The dimple location also indicates which two cutting teeth are 180° opposed



Replaceable Head Reamers

Product Overview

Expandable Heads

5000 Series	7000 Series
	
9.600 mm - 32.600 mm (0.3780" - 1.2835") - Heads arrive set to finish diameter and specified tolerance. - Twist-lock heads for precision locating of the head to the mandrel. - Best TIR repeatability from head to head providing consistent tool wear and maximized tool life.	11.800 mm - 60.609 mm (0.4646" - 2.3862") - Multiple diameters within the same arbor reduce inventory requirements. - Coolant configurations for blind and through hole applications. - Reamer head reconditions are available upon request. - Expands up to 1% on diameter to accommodate for wear. ± 0.005 mm (0.0002") tolerance capability.

Fixed Heads


7000 Series	9000 Series
	
11.800 mm - 60.609 mm (0.4646" - 2.3862") 60.610 mm - 80.600 mm (2.3863" - 3.1732") diameters available as specials by contacting Application Engineering. - Multiple diameters within the same arbor reduce inventory requirements. - Coolant configurations for blind and through hole applications. - Reamer head reconditions are available upon request. - Nonexpanding diameter for simple on-machine replacement. - H7 tolerance capability.	11.800 mm - 40.600 mm (0.4646" - 1.5984") - Heads are precision ground to finish diameter. - Quick-change heads require minimal downtime for replacement. - Sintered carbide or cermet design provides improved rigidity in difficult applications. - H7 tolerance capability.

Coatings

Uncoated	TiN	TiAlN	TiCN	Alcrona	Hardcut	R Coating	T Coating
							


Reference Key

Symbol	Attribute
D_1	Reamer head diameter
D_2	Shank diameter
L_1	Overall length
L_2	Length of cut
H	Hex key (listed with screws)

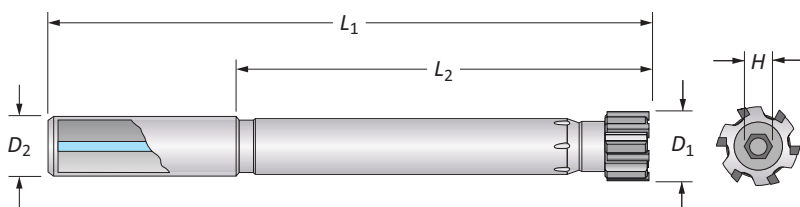

Mandrel Shanks Available:

- Cylindrical
- Modular Connection

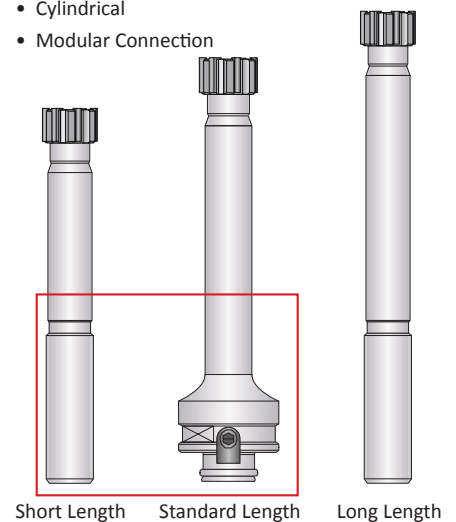

Product Nomenclature

7000 Series Replaceable Reamer Heads

I	7400	–	K	N	G	–	10000
1	2		3	4	5		7

1. Diameter Unit of Measure	2. Series		3. Substrate	4. Coating	
Blank = Metric diameter (mm) I = Imperial diameter (in) NOTE: For reconditions, put an “R” at the beginning of the item number (7000 series only).	<u>Expandable</u> 7405 7605 7705	<u>Fixed</u> 7400 7600 7700	K = Carbide S = Cermet	L = Uncoated carbide V = Uncoated cermet N = TiN C = TiCN A = TiAlN	K = Alcrona H = Hardcut R = R coating T = T coating
5. Lead-in			6. Diameter (D₁)		
A, F, G, L, N, T, V = Straight flute E, M = Helical Flute (right-hand or left-hand) K = Chipbreaker geometry (straight or right-hand helical)			XXXXX = X.XXXX" (Imperial) XXXXX = XX.XXX mm (Metric)		

Note: Contact Application engineering about optional add-on features for 7000 series.

9000/5000 Series Replaceable Reamer Heads

I	9700	–	K	N	G	H	–	10000	+	0000	–	0008
1	2		3	4	5	6		7		8		

1. Diameter Unit of Measure	2. Series		3. Substrate	4. Coating	
Blank = Metric diameter (mm) I = Imperial diameter (in)	<u>5000 Series</u> 5400 5401 5600 5700	<u>9000 Series</u> 9400 9600 9700	K = Carbide S = Cermet	L = Uncoated carbide V = Uncoated cermet N = TiN C = TiCN A = TiAlN	K = Alcrona H = Hardcut R = R coating T = T coating
5. Lead-in	6. Optional add-on		7. Diameter (D ₁)	8. Tolerance*	
A, F, G, L, N, T, V = Straight flute E, M = Helical Flute (right-hand or left-hand) K = Chipbreaker geometry (straight or right-hand helical)	Blank = No add-on H = Half circular face Z = Double back taper HZ = Half circular face and double back taper		XXXXX = X.XXXX" (Imperial) XXXXX = XX.XXX mm (Metric)	4 decimal places = inch tolerance 3 decimal places = mm tolerance *The total tolerance capable for 5000 series reamers is 0.0002" (0.005 mm) and H7 for 9000 series reamers.	

Series Details

Series	5000 Series				7000 Series						9000 Series		
	5400	5401	5600	5700	7405	7605	7705	7400	7600	7700	9400	9600	9700
Flute	Straight												
	Right-hand helical												
	Left-hand helical												
Head	Fixed												
	Expandable												
Coolant	Radial (through hole)												
	Central (blind hole)												

Replaceable Head Reamers

7000 SERIES

11.800 mm - 80.600 mm (0.4646" - 3.1732")

- ▶ Features both expandable and fixed diameter heads.
- ▶ Multiple diameters within the same arbor reduce inventory requirements.
- ▶ Coolant configurations for blind and through hole applications.
- ▶ Available with brazed carbide, cermet, or PCD cutting edges.
- ▶ Reamer head reconditions are available upon request.



fixed head reamers



- ▶ Nonexpanding diameter for simple on-machine replacement.
- ▶ H7 tolerance capability.

expandable head reamers



- ▶ Expands up to 1% on diameter to accommodate for wear.
- ▶ ± 0.005 mm (0.0002") tolerance capability.

Lead Time in Work Days

7000 Series		2 - 5 pcs	6 - 19 pcs	20+ pcs
Fixed	Coated	20	25	25
	Uncoated	15	20	20
Expandable	Coated	20	25	30
	Uncoated	15	20	25

Building Your Complete Tool

You will need all three pieces to complete your replaceable head reamer assembly. The item numbers for the screws and the mandrels are listed on their respective pages. However, there is a guide on the pages where the heads are located. You must follow the guide to build the item number for the reamer head that you need.

The complete mandrel item numbers are listed on their respective pages. You do not need to build the mandrel numbers.

1

Select Your Head



2

Select Your Screw



3

Select Your Mandrel





Replaceable Heads

Expandable | 7000 Series

Build Your Part No.

1

Series

2

Flute Style

Your flute style is based on your series selection (above).

3

Carbide Grade and Coating Codes

These are the combinations of grades and coatings you can choose from.

4

Lead-in Recommendations

5

Diameter

For the diameter portion of the item number, refer to the following tables:

7405 Series



7605 Series



7705 Series





	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

	E	M	K
P	●		○
S	●	○	
M	●		○
H	○	●	
K	○	●	○
N	●	○	

	E	M
P	●	
S	●	○
M	●	
H	○	●
K	○	●
N	●	○


Metric (mm)		Imperial (in)	
D ₁ Range	Tolerance (min/max)	D ₁ Range	Tolerance (min/max)
11.800 - 18.000	-0.005 / +0.005	0.4646 - 0.7086	-0.0002 / +0.0002
18.001 - 30.000		0.7087 - 1.1810	
30.001 - 40.000		1.1811 - 1.5747	
40.001 - 50.000		1.5748 - 1.9684	
50.001 - 60.609		1.9685 - 2.3862	

● Best ○ Better ○ Good

Ordering Example:

The customer needs the following:

- Straight fluted 7000 series reamer head
- Expandable style
- Carbide
- TiN coating
- G lead-in
- 50.000 mm diameter

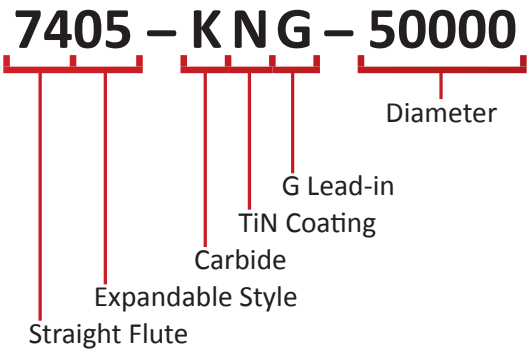


C: 68 - 87


C: 15 - 16


C: 17 - 19


C: 60 - 65

C: 88













Replaceable Heads

Fixed | 7000 Series

Build Your Part No.

1 Series	7400 Series	7600 Series	7700 Series																																																																																																																
2 Flute Style	Straight Flute 	Helical Flute (Right-Hand) 	Helical Flute (Left-Hand) 																																																																																																																
3 Carbide Grade and Coating Codes	These are the combinations of grades and coatings you can choose from.  <table border="1"> <thead> <tr> <th></th> <th>Uncoated</th> <th>TiN</th> <th>TiCN</th> <th>TiAlN</th> <th>Alcrona</th> <th>Hardcut</th> <th>R Coating</th> <th>T Coating</th> </tr> </thead> <tbody> <tr> <td>Carbide</td> <td>KL</td> <td>KN</td> <td>KC</td> <td>KA</td> <td>KK</td> <td>KH</td> <td>KR</td> <td>KT</td> </tr> <tr> <td>Cermet</td> <td>SV</td> <td>SN</td> <td>SC</td> <td>SA</td> <td>SK</td> <td>SH</td> <td>SR</td> <td>ST</td> </tr> </tbody> </table>				Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating	Carbide	KL	KN	KC	KA	KK	KH	KR	KT	Cermet	SV	SN	SC	SA	SK	SH	SR	ST																																																																																					
	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating																																																																																																											
Carbide	KL	KN	KC	KA	KK	KH	KR	KT																																																																																																											
Cermet	SV	SN	SC	SA	SK	SH	SR	ST																																																																																																											
4 Lead-in Recommendations	<table border="1"> <thead> <tr> <th></th> <th>T</th> <th>F</th> <th>N</th> <th>G</th> <th>L</th> <th>A</th> <th>V</th> <th>K</th> </tr> </thead> <tbody> <tr> <td>P</td> <td></td> <td></td> <td>●</td> <td>●</td> <td></td> <td>○</td> <td>○</td> <td>○</td> </tr> <tr> <td>S</td> <td>●</td> <td></td> <td></td> <td>○</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>M</td> <td></td> <td></td> <td>○</td> <td>●</td> <td></td> <td></td> <td></td> <td>○</td> </tr> <tr> <td>H</td> <td></td> <td></td> <td>○</td> <td>●</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>K</td> <td></td> <td></td> <td></td> <td>○</td> <td></td> <td></td> <td>●</td> <td>○</td> </tr> <tr> <td>N</td> <td></td> <td></td> <td></td> <td>●</td> <td></td> <td></td> <td>○</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th></th> <th>E</th> <th>M</th> <th>K</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>●</td> <td></td> <td>○</td> </tr> <tr> <td>S</td> <td>●</td> <td>○</td> <td></td> </tr> <tr> <td>M</td> <td>●</td> <td></td> <td>○</td> </tr> <tr> <td>H</td> <td>○</td> <td>●</td> <td></td> </tr> <tr> <td>K</td> <td>○</td> <td>●</td> <td>○</td> </tr> <tr> <td>N</td> <td>●</td> <td>○</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th></th> <th>E</th> <th>M</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>●</td> <td></td> </tr> <tr> <td>S</td> <td>●</td> <td>○</td> </tr> <tr> <td>M</td> <td>●</td> <td></td> </tr> <tr> <td>H</td> <td>○</td> <td>●</td> </tr> <tr> <td>K</td> <td>○</td> <td>●</td> </tr> <tr> <td>N</td> <td>●</td> <td>○</td> </tr> </tbody> </table>				T	F	N	G	L	A	V	K	P			●	●		○	○	○	S	●			○					M			○	●				○	H			○	●					K				○			●	○	N				●			○			E	M	K	P	●		○	S	●	○		M	●		○	H	○	●		K	○	●	○	N	●	○			E	M	P	●		S	●	○	M	●		H	○	●	K	○	●	N	●	○
	T	F	N	G	L	A	V	K																																																																																																											
P			●	●		○	○	○																																																																																																											
S	●			○																																																																																																															
M			○	●				○																																																																																																											
H			○	●																																																																																																															
K				○			●	○																																																																																																											
N				●			○																																																																																																												
	E	M	K																																																																																																																
P	●		○																																																																																																																
S	●	○																																																																																																																	
M	●		○																																																																																																																
H	○	●																																																																																																																	
K	○	●	○																																																																																																																
N	●	○																																																																																																																	
	E	M																																																																																																																	
P	●																																																																																																																		
S	●	○																																																																																																																	
M	●																																																																																																																		
H	○	●																																																																																																																	
K	○	●																																																																																																																	
N	●	○																																																																																																																	
5 Diameter (H7 Tolerance)	<table border="1"> <thead> <tr> <th colspan="2">Metric (mm)</th> <th colspan="2">Imperial (in)</th> </tr> <tr> <th>D₁ Range</th> <th>Tolerance (min/max)</th> <th>D₁ Range</th> <th>Tolerance (min/max)</th> </tr> </thead> <tbody> <tr> <td>11.800 - 18.000</td> <td>+0 / +0.018</td> <td>0.4646 - 0.7086</td> <td>+0 / +0.0007</td> </tr> <tr> <td>18.001 - 30.000</td> <td>+0 / +0.021</td> <td>0.7087 - 1.1810</td> <td>+0 / +0.0008</td> </tr> <tr> <td>30.001 - 50.000</td> <td>+0 / +0.025</td> <td>1.1811 - 1.9684</td> <td>+0 / +0.0010</td> </tr> <tr> <td>50.001 - 60.609</td> <td>+0 / +0.030</td> <td>1.9685 - 2.3862</td> <td>+0 / +0.0012</td> </tr> </tbody> </table> 60.610 mm - 80.600 mm (2.3863" - 3.1732") diameters are available as specials by contacting Application Engineering.			Metric (mm)		Imperial (in)		D ₁ Range	Tolerance (min/max)	D ₁ Range	Tolerance (min/max)	11.800 - 18.000	+0 / +0.018	0.4646 - 0.7086	+0 / +0.0007	18.001 - 30.000	+0 / +0.021	0.7087 - 1.1810	+0 / +0.0008	30.001 - 50.000	+0 / +0.025	1.1811 - 1.9684	+0 / +0.0010	50.001 - 60.609	+0 / +0.030	1.9685 - 2.3862	+0 / +0.0012																																																																																								
Metric (mm)		Imperial (in)																																																																																																																	
D ₁ Range	Tolerance (min/max)	D ₁ Range	Tolerance (min/max)																																																																																																																
11.800 - 18.000	+0 / +0.018	0.4646 - 0.7086	+0 / +0.0007																																																																																																																
18.001 - 30.000	+0 / +0.021	0.7087 - 1.1810	+0 / +0.0008																																																																																																																
30.001 - 50.000	+0 / +0.025	1.1811 - 1.9684	+0 / +0.0010																																																																																																																
50.001 - 60.609	+0 / +0.030	1.9685 - 2.3862	+0 / +0.0012																																																																																																																

● Best ○ Better ○ Good

Ordering Example:


The customer needs the following:

- Straight fluted 7000 series reamer head
- Fixed style
- Carbide
- TiN coating
- G lead-in
- 50.000 mm diameter
- H7 tolerance +0/ +0.025 mm for 50.00 mm diameter

7400 – K N G – 50000

Diagram illustrating the part number breakdown:


- 7400: Series
- K: Fixed Style
- N: Straight Flute
- G: Lead-in
- TiN Coating
- Carbide
- 50000: Diameter






Replaceable Head Screws

Fixed | 7000 Series

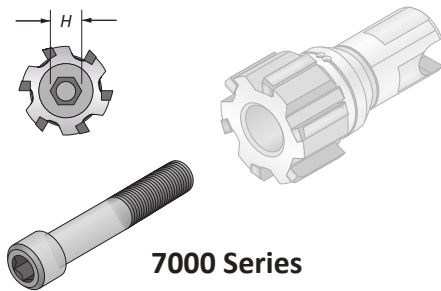

7000 Series

D ₁ Range*		Part No.	H (mm)
Metric (mm)	Imperial (in)		
11.800 - 14.609	0.4646 - 0.5751	7000-VI-001	2.5
14.610 - 17.609	0.5752 - 0.6932	7000-VI-002	3
17.610 - 21.609	0.6933 - 0.8507	7000-VI-003	4
21.610 - 26.609	0.8508 - 1.0475	7000-VI-004	5
26.610 - 32.609	1.0476 - 1.2838	7000-VI-005	6
32.610 - 40.609	1.2839 - 1.5987	7000-VI-006	6
40.610 - 50.609	1.5988 - 1.9924	7000-VI-007	8
50.610 - 60.609	1.9925 - 2.3862	7000-VI-008	10
60.610 - 80.600	2.3863 - 3.1732	7000-VI-009	12

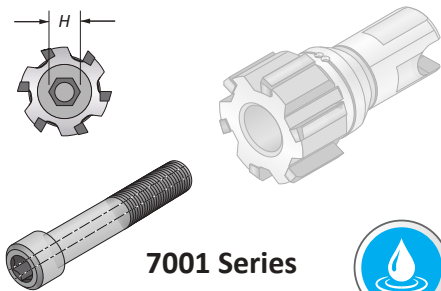

7001 Series



D ₁ Range*		Part No.	H (mm)
Metric (mm)	Imperial (in)		
11.800 - 14.609	0.4646 - 0.5751	7001-VI-001	2.5
14.610 - 17.609	0.5752 - 0.6932	7001-VI-002	3
17.610 - 21.609	0.6933 - 0.8507	7001-VI-003	4
21.610 - 26.609	0.8508 - 1.0475	7001-VI-004	5
26.610 - 32.609	1.0476 - 1.2838	7001-VI-005	6
32.610 - 40.609	1.2839 - 1.5987	7001-VI-006	6
40.610 - 50.609	1.5988 - 1.9924	7001-VI-007	8
50.610 - 60.609	1.9925 - 2.3862	7001-VI-008	10
60.610 - 80.600	2.3863 - 3.1732	7001-VI-009	12

* 60.610 mm - 80.600 mm (2.3863" - 3.1732") diameter heads are available as specials by contacting Application Engineering.

7000 Series Locking Screws	
Radial Coolant Only	No Coolant
7000 Series Mandrels	7001 Series Mandrels

7001 Series Locking Screws	
Radial and Central Coolant	Central Coolant Only
7000 Series Mandrels	7001 Series Mandrels

C: 68 - 87

C: 13 - 14

C: 17 - 19

C: 60 - 65


C: 88

key on C: 1




Replaceable Head Screws

Expandable | 7000 Series

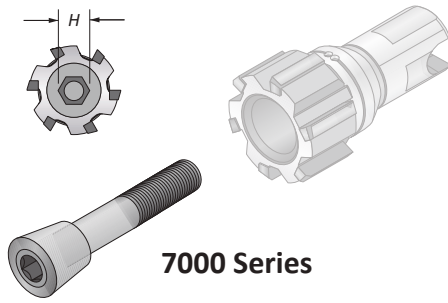

7000 Series

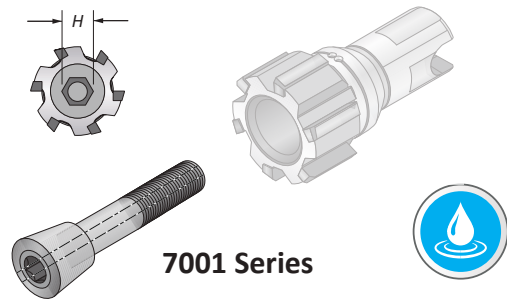

7001 Series

D ₁ Range		Part No.	H (mm)
Metric (mm)	Imperial (in)		
11.800 - 12.609	0.4646 - 0.4964	7000-VI-012	3.5
12.610 - 13.609	0.4965 - 0.5357	7000-VI-013	3.5
13.610 - 14.609	0.5358 - 0.5751	7000-VI-014	3.5
14.610 - 15.609	0.5752 - 0.6145	7000-VI-015	4
15.610 - 16.609	0.6146 - 0.6538	7000-VI-016	4
16.610 - 17.609	0.6539 - 0.6932	7000-VI-017	4
17.610 - 18.609	0.6933 - 0.7326	7000-VI-018	5
18.610 - 19.609	0.7327 - 0.7719	7000-VI-019	5
19.610 - 20.609	0.7720 - 0.8113	7000-VI-020	5
20.610 - 21.609	0.8114 - 0.8507	7000-VI-021	5
21.610 - 22.609	0.8508 - 0.8901	7000-VI-022	6
22.610 - 23.609	0.8902 - 0.9294	7000-VI-023	6
23.610 - 24.609	0.9295 - 0.9688	7000-VI-024	6
24.610 - 25.609	0.9689 - 1.0082	7000-VI-025	6
25.610 - 26.609	1.0083 - 1.0475	7000-VI-026	6
26.610 - 27.609	1.0476 - 1.0869	7000-VI-027	8
27.610 - 28.609	1.0870 - 1.1263	7000-VI-028	8
28.610 - 29.609	1.1264 - 1.1656	7000-VI-029	8
29.610 - 30.609	1.1657 - 1.2050	7000-VI-030	8
30.610 - 31.609	1.2051 - 1.2444	7000-VI-031	8
31.610 - 32.609	1.2445 - 1.2838	7000-VI-032	8
32.610 - 33.609	1.2839 - 1.3231	7000-VI-033	10
33.610 - 34.609	1.3232 - 1.3625	7000-VI-034	10
34.610 - 35.609	1.3626 - 1.4019	7000-VI-035	10
35.610 - 36.609	1.4020 - 1.4412	7000-VI-036	10
36.610 - 37.609	1.4413 - 1.4806	7000-VI-037	10
37.610 - 38.609	1.4807 - 1.5200	7000-VI-038	10
38.610 - 39.609	1.5201 - 1.5593	7000-VI-039	10
39.610 - 40.609	1.5594 - 1.5987	7000-VI-040	10
40.610 - 41.609	1.5988 - 1.6381	7000-VI-041	12
41.610 - 42.609	1.6382 - 1.6775	7000-VI-042	12
42.610 - 43.609	1.6776 - 1.7168	7000-VI-043	12
43.610 - 44.609	1.7169 - 1.7562	7000-VI-044	12
44.610 - 45.609	1.7563 - 1.7956	7000-VI-045	12
45.610 - 46.609	1.7957 - 1.8349	7000-VI-046	12
46.610 - 47.609	1.8350 - 1.8743	7000-VI-047	12
47.610 - 48.609	1.8744 - 1.9137	7000-VI-048	12
48.610 - 49.609	1.9138 - 1.9530	7000-VI-049	12
49.610 - 50.609	1.9531 - 1.9924	7000-VI-050	12
50.610 - 51.609	1.9925 - 2.0318	7000-VI-051	12
51.610 - 52.609	2.0319 - 2.0712	7000-VI-052	12
52.610 - 53.609	2.0713 - 2.1105	7000-VI-053	12
53.610 - 54.609	2.1106 - 2.1499	7000-VI-054	12
54.610 - 55.609	2.1500 - 2.1893	7000-VI-055	12
55.610 - 56.609	2.1894 - 2.2286	7000-VI-056	12
56.610 - 57.609	2.2287 - 2.2680	7000-VI-057	12
57.610 - 58.609	2.2681 - 2.3074	7000-VI-058	12
58.610 - 59.609	2.3075 - 2.3468	7000-VI-059	12
59.610 - 60.609	2.3469 - 2.3862	7000-VI-060	12

D ₁ Range		Part No.	H (mm)
Metric (mm)	Imperial (in)		
11.800 - 12.609	0.4646 - 0.4964	7001-VI-012	3.5
12.610 - 13.609	0.4965 - 0.5357	7001-VI-013	3.5
13.610 - 14.609	0.5358 - 0.5751	7001-VI-014	3.5
14.610 - 15.609	0.5752 - 0.6145	7001-VI-015	4
15.610 - 16.609	0.6146 - 0.6538	7001-VI-016	4
16.610 - 17.609	0.6539 - 0.6932	7001-VI-017	4
17.610 - 18.609	0.6933 - 0.7326	7001-VI-018	5
18.610 - 19.609	0.7327 - 0.7719	7001-VI-019	5
19.610 - 20.609	0.7720 - 0.8113	7001-VI-020	5
20.610 - 21.609	0.8114 - 0.8507	7001-VI-021	5
21.610 - 22.609	0.8508 - 0.8901	7001-VI-022	6
22.610 - 23.609	0.8902 - 0.9294	7001-VI-023	6
23.610 - 24.609	0.9295 - 0.9688	7001-VI-024	6
24.610 - 25.609	0.9689 - 1.0082	7001-VI-025	6
25.610 - 26.609	1.0083 - 1.0475	7001-VI-026	6
26.610 - 27.609	1.0476 - 1.0869	7001-VI-027	8
27.610 - 28.609	1.0870 - 1.1263	7001-VI-028	8
28.610 - 29.609	1.1264 - 1.1656	7001-VI-029	8
29.610 - 30.609	1.1657 - 1.2050	7001-VI-030	8
30.610 - 31.609	1.2051 - 1.2444	7001-VI-031	8
31.610 - 32.609	1.2445 - 1.2838	7001-VI-032	8
32.610 - 33.609	1.2839 - 1.3231	7001-VI-033	10
33.610 - 34.609	1.3232 - 1.3625	7001-VI-034	10
34.610 - 35.609	1.3626 - 1.4019	7001-VI-035	10
35.610 - 36.609	1.4020 - 1.4412	7001-VI-036	10
36.610 - 37.609	1.4413 - 1.4806	7001-VI-037	10
37.610 - 38.609	1.4807 - 1.5200	7001-VI-038	10
38.610 - 39.609	1.5201 - 1.5593	7001-VI-039	10
39.610 - 40.609	1.5594 - 1.5987	7001-VI-040	10
40.610 - 41.609	1.5988 - 1.6381	7001-VI-041	12
41.610 - 42.609	1.6382 - 1.6775	7001-VI-042	12
42.610 - 43.609	1.6776 - 1.7168	7001-VI-043	12
43.610 - 44.609	1.7169 - 1.7562	7001-VI-044	12
44.610 - 45.609	1.7563 - 1.7956	7001-VI-045	12
45.610 - 46.609	1.7957 - 1.8349	7001-VI-046	12
46.610 - 47.609	1.8350 - 1.8743	7001-VI-047	12
47.610 - 48.609	1.8744 - 1.9137	7001-VI-048	12
48.610 - 49.609	1.9138 - 1.9530	7001-VI-049	12
49.610 - 50.609	1.9531 - 1.9924	7001-VI-050	12
50.610 - 51.609	1.9925 - 2.0318	7001-VI-051	12
51.610 - 52.609	2.0319 - 2.0712	7001-VI-052	12
52.610 - 53.609	2.0713 - 2.1105	7001-VI-053	12
53.610 - 54.609	2.1106 - 2.1499	7001-VI-054	12
54.610 - 55.609	2.1500 - 2.1893	7001-VI-055	12
55.610 - 56.609	2.1894 - 2.2286	7001-VI-056	12
56.610 - 57.609	2.2287 - 2.2680	7001-VI-057	12
57.610 - 58.609	2.2681 - 2.3074	7001-VI-058	12
58.610 - 59.609	2.3075 - 2.3468	7001-VI-059	12
59.610 - 60.609	2.3469 - 2.3862	7001-VI-060	12





C: 68 - 87

C: 13 - 14

C: 17 - 19


C: 60 - 65

C: 88



Replaceable Head Mandrels

7000 Series | Diameter Range: 0.4646" - 3.1732" (11.800 mm - 80.600 mm)

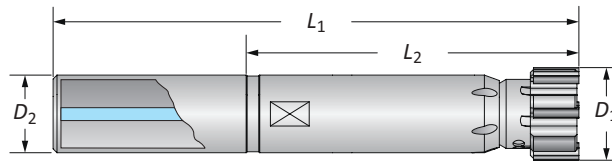




Cylindrical Shank | Short

D ₁ Range*		Mandrel			No. of Teeth	Part No.	
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)		7000 Series	7001 Series
11.800 - 14.609	0.4646 - 0.5751	50	95	12	6	7000-MC-001	7001-MC-001
14.610 - 17.609	0.5752 - 0.6932	65	113	16	6	7000-MC-002	7001-MC-002
17.610 - 21.609	0.6933 - 0.8507	75	125	20	6	7000-MC-003	7001-MC-003
21.610 - 26.609	0.8508 - 1.0475	85	135	20	6	7000-MC-004	7001-MC-004
26.610 - 32.609	1.0476 - 1.2838	105	161	25	6	7000-MC-005	7001-MC-005
32.610 - 40.609	1.2839 - 1.5987	120	180	32	6	7000-MC-006	7001-MC-006
40.610 - 45.609	1.5988 - 1.7956	120	180	32	6	7000-MC-007	7001-MC-007
45.610 - 50.609	1.7957 - 1.9924	120	180	32	8	7000-MC-075	7001-MC-075
50.610 - 60.609	1.9925 - 2.3862	120	190	32	8	7000-MC-008	7001-MC-008
60.610 - 80.600	2.3863 - 3.1732	120	180	32	8/10/12	7000-MC-009	—

Cylindrical Shank | Long

D ₁ Range*		Mandrel			No. of Teeth	Part No.	
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)		7000 Series	7001 Series
11.800 - 14.609	0.4646 - 0.5751	95	140	12	6	7000-ML-001	7001-ML-001
14.610 - 17.609	0.5752 - 0.6932	105	153	16	6	7000-ML-002	7001-ML-002
17.610 - 21.609	0.6933 - 0.8507	125	175	20	6	7000-ML-003	7001-ML-003
21.610 - 26.609	0.8508 - 1.0475	145	195	20	6	7000-ML-004	7001-ML-004
26.610 - 32.609	1.0476 - 1.2838	165	221	25	6	7000-ML-005	7001-ML-005
32.610 - 40.609	1.2839 - 1.5987	185	245	32	6	7000-ML-006	7001-ML-006
40.610 - 45.609	1.5988 - 1.7956	185	245	32	6	7000-ML-007	7001-ML-007
45.610 - 50.609	1.7957 - 1.9924	185	245	32	8	7000-ML-075	7001-ML-075
50.610 - 60.609	1.9925 - 2.3862	185	255	32	8	7000-ML-008	7001-ML-008
60.610 - 80.600	2.3863 - 3.1732	185	245	32	8/10/12	7000-ML-009	—

* 60.610 mm - 80.600 mm (2.3863" - 3.1732") diameter heads are available as specials by contacting Application Engineering.

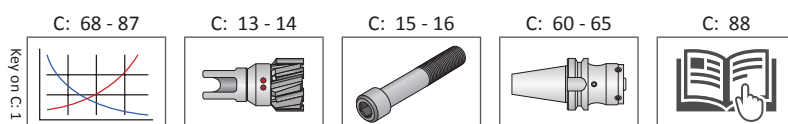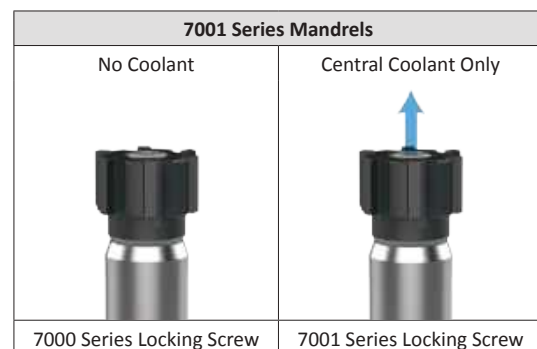
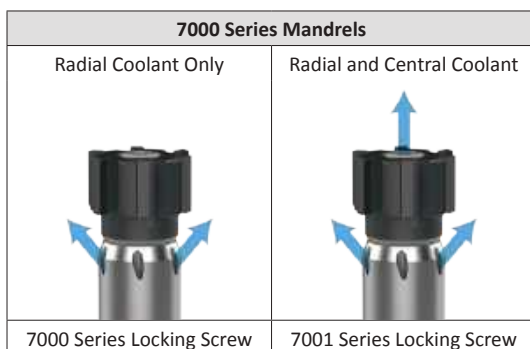


Application recommendation:

- Through hole application = radial coolant
- Blind hole application = central coolant




**Replaceable Head Mandrels**

7000 Series | Diameter Range: 0.4646" - 3.1732" (11.800 mm - 80.600 mm)

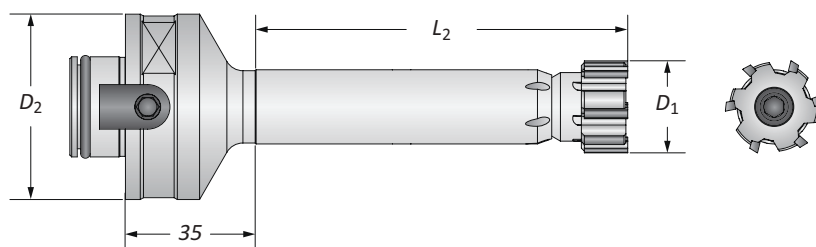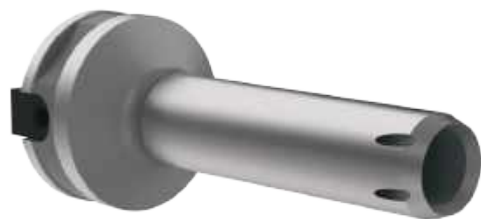**Modular Shank | Standard**

D_1 Range*		Mandrel		No. of Teeth	Part No.	
Metric (mm)	Imperial (in)	L_2 (mm)	D_2 (mm)		7000 Series	7001 Series
11.800 - 14.609	0.4646 - 0.5751	65	50	6	7000-MM-001	7001-MM-001
14.610 - 17.609	0.5752 - 0.6932	80	50	6	7000-MM-002	7001-MM-002
17.610 - 21.609	0.6933 - 0.8507	90	50	6	7000-MM-003	7001-MM-003
21.610 - 26.609	0.8508 - 1.0475	100	50	6	7000-MM-004	7001-MM-004
26.610 - 32.609	1.0476 - 1.2838	110	50	6	7000-MM-005	7001-MM-005
32.610 - 40.609	1.2839 - 1.5987	120	50	6	7000-MM-006	7001-MM-006
40.610 - 45.609	1.5988 - 1.7956	120	50	6	7000-MM-007	7001-MM-007
45.610 - 50.609	1.7957 - 1.9924	120	50	8	7000-MM-075	7001-MM-075
50.610 - 60.609	1.9925 - 2.3862	120	50	8	7000-MM-008	7001-MM-008
60.610 - 80.600	2.3863 - 3.1732	120	63	8/10/12	7000-MM-009	—

* 60.610 mm - 80.600 mm (2.3863" - 3.1732") diameter heads are available as specials by contacting Application Engineering.

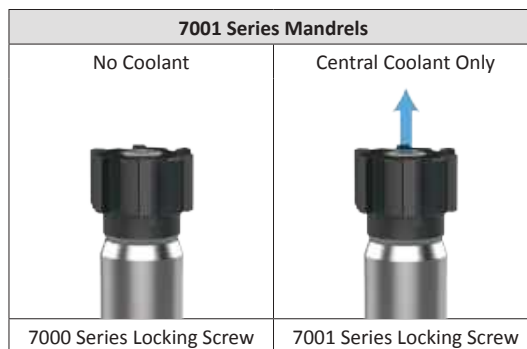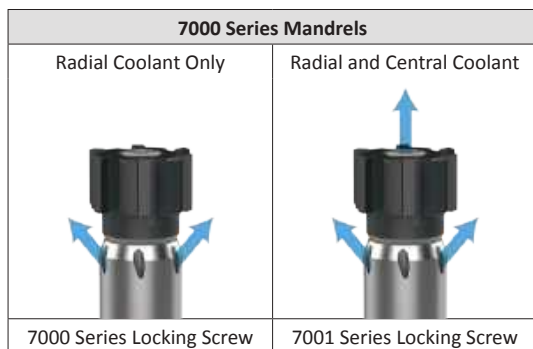**Application recommendation:**

- Through hole application = radial coolant
- Blind hole application = central coolant



Replaceable Head Reamers

9000 SERIES

11.800 mm - 40.600 mm (0.4646" - 1.5984")

- Features fixed diameter heads.
- Heads are precision ground to finish diameter.
- Quick-change heads require minimal downtime for replacement.
- Sintered carbide or cermet design provides improved rigidity in difficult applications.
- H7 tolerance capability.



Lead Time in Work Days

9000 Series	2 - 9 pcs	10 - 49 pcs	50 - 99 pcs	100+ pcs
Coated	20	25	30	35
Uncoated	15	20	25	30

Building Your Complete Tool

You will need all three pieces to complete your replaceable head reamer assembly. The item numbers for the screws and the mandrels are listed on their respective pages. However, there is a guide on the pages where the heads are located. You must follow the guide to build the item number for the reamer head that you need.

The complete mandrel item numbers are listed on their respective pages. You do not need to build the mandrel numbers.

1

Select Your Head

**2**

Select Your Screw

**3**

Select Your Mandrel





Replaceable Heads

Fixed | 9000 Series

Build Your Part No.



1 Series	9400 Series	9600 Series	9700 Series																																																																																																																					
2 Flute Style Your flute style is based on your series selection (above).	Straight Flute 	Helical Flute (Right-Hand) 	Helical Flute (Left-Hand) 																																																																																																																					
3 Carbide Grade and Coating Codes These are the combinations of grades and coatings you can choose from.	 <table> <tr> <th></th><th>Uncoated</th><th>TiN</th><th>TiCN</th><th>TiAlN</th><th>Alcrona</th><th>Hardcut</th><th>R Coating</th><th>T Coating</th></tr> <tr> <th>Carbide</th><td>KL</td><td>KN</td><td>KC</td><td>KA</td><td>KK</td><td>KH</td><td>KR</td><td>KT</td></tr> <tr> <th>Cermet</th><td>SV</td><td>SN</td><td>SC</td><td>SA</td><td>SK</td><td>SH</td><td>SR</td><td>ST</td></tr> </table>									Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating	Carbide	KL	KN	KC	KA	KK	KH	KR	KT	Cermet	SV	SN	SC	SA	SK	SH	SR	ST																																																																																					
	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating																																																																																																																
Carbide	KL	KN	KC	KA	KK	KH	KR	KT																																																																																																																
Cermet	SV	SN	SC	SA	SK	SH	SR	ST																																																																																																																
4 Lead-in Recommendations	<table> <tr> <th></th><th>T</th><th>F</th><th>N</th><th>G</th><th>L</th><th>A</th><th>V</th><th>K</th></tr> <tr> <th>P</th><td></td><td></td><td>●</td><td></td><td></td><td>○</td><td>○</td><td>○</td></tr> <tr> <th>S</th><td>●</td><td></td><td></td><td>○</td><td></td><td></td><td></td><td></td></tr> <tr> <th>M</th><td></td><td></td><td>○</td><td>●</td><td></td><td></td><td></td><td>○</td></tr> <tr> <th>H</th><td></td><td></td><td>○</td><td>●</td><td></td><td></td><td></td><td></td></tr> <tr> <th>K</th><td></td><td></td><td></td><td></td><td>○</td><td></td><td>●</td><td>○</td></tr> <tr> <th>N</th><td></td><td></td><td></td><td>●</td><td></td><td></td><td>○</td><td></td></tr> </table> <table> <tr> <th></th><th>E</th><th>M</th><th>K</th></tr> <tr> <th>P</th><td>●</td><td></td><td>○</td></tr> <tr> <th>S</th><td>●</td><td>○</td><td></td></tr> <tr> <th>M</th><td>●</td><td></td><td>○</td></tr> <tr> <th>H</th><td>○</td><td>●</td><td></td></tr> <tr> <th>K</th><td>○</td><td>●</td><td>○</td></tr> <tr> <th>N</th><td>●</td><td>○</td><td></td></tr> </table> <table> <tr> <th></th><th>E</th><th>M</th></tr> <tr> <th>P</th><td>●</td><td></td></tr> <tr> <th>S</th><td>●</td><td>○</td></tr> <tr> <th>M</th><td>●</td><td></td></tr> <tr> <th>H</th><td>○</td><td>●</td></tr> <tr> <th>K</th><td>○</td><td>●</td></tr> <tr> <th>N</th><td>●</td><td>○</td></tr> </table>									T	F	N	G	L	A	V	K	P			●			○	○	○	S	●			○					M			○	●				○	H			○	●					K					○		●	○	N				●			○			E	M	K	P	●		○	S	●	○		M	●		○	H	○	●		K	○	●	○	N	●	○			E	M	P	●		S	●	○	M	●		H	○	●	K	○	●	N	●	○
	T	F	N	G	L	A	V	K																																																																																																																
P			●			○	○	○																																																																																																																
S	●			○																																																																																																																				
M			○	●				○																																																																																																																
H			○	●																																																																																																																				
K					○		●	○																																																																																																																
N				●			○																																																																																																																	
	E	M	K																																																																																																																					
P	●		○																																																																																																																					
S	●	○																																																																																																																						
M	●		○																																																																																																																					
H	○	●																																																																																																																						
K	○	●	○																																																																																																																					
N	●	○																																																																																																																						
	E	M																																																																																																																						
P	●																																																																																																																							
S	●	○																																																																																																																						
M	●																																																																																																																							
H	○	●																																																																																																																						
K	○	●																																																																																																																						
N	●	○																																																																																																																						
5 Optional Add-ons	<table> <tr> <th>Add-on</th><th>Indicator</th><th>Description</th></tr> <tr> <td>Half Circular Face</td><td>H</td><td>Provides improved tool life in materials over 25 Rc.</td></tr> <tr> <td>Double Back Taper</td><td>X</td><td>Provides improved tool life in materials over 25 Rc but should not be used in applications requiring less than a 32 Ra surface finish.</td></tr> </table>								Add-on	Indicator	Description	Half Circular Face	H	Provides improved tool life in materials over 25 Rc.	Double Back Taper	X	Provides improved tool life in materials over 25 Rc but should not be used in applications requiring less than a 32 Ra surface finish.																																																																																																							
Add-on	Indicator	Description																																																																																																																						
Half Circular Face	H	Provides improved tool life in materials over 25 Rc.																																																																																																																						
Double Back Taper	X	Provides improved tool life in materials over 25 Rc but should not be used in applications requiring less than a 32 Ra surface finish.																																																																																																																						
6 Diameter (H7 Tolerance) For the diameter portion of the item number, refer to the following tables:	<table> <tr> <th colspan="2">Metric (mm)</th><th colspan="2">Imperial (in)</th></tr> <tr> <th>D₁ Range</th><th>Tolerance (min/max)</th><th>D₁ Range</th><th>Tolerance (min/max)</th></tr> <tr> <td>11.800 - 18.000</td><td>+0 / +0.018</td><td>0.4646 - 0.7086</td><td>+0 / +0.0007</td></tr> <tr> <td>18.001 - 30.000</td><td>+0 / +0.021</td><td>0.7087 - 1.1810</td><td>+0 / +0.0008</td></tr> <tr> <td>30.001 - 40.600</td><td>+0 / +0.025</td><td>1.1811 - 1.5984</td><td>+0 / +0.0010</td></tr> </table>								Metric (mm)		Imperial (in)		D ₁ Range	Tolerance (min/max)	D ₁ Range	Tolerance (min/max)	11.800 - 18.000	+0 / +0.018	0.4646 - 0.7086	+0 / +0.0007	18.001 - 30.000	+0 / +0.021	0.7087 - 1.1810	+0 / +0.0008	30.001 - 40.600	+0 / +0.025	1.1811 - 1.5984	+0 / +0.0010																																																																																												
Metric (mm)		Imperial (in)																																																																																																																						
D ₁ Range	Tolerance (min/max)	D ₁ Range	Tolerance (min/max)																																																																																																																					
11.800 - 18.000	+0 / +0.018	0.4646 - 0.7086	+0 / +0.0007																																																																																																																					
18.001 - 30.000	+0 / +0.021	0.7087 - 1.1810	+0 / +0.0008																																																																																																																					
30.001 - 40.600	+0 / +0.025	1.1811 - 1.5984	+0 / +0.0010																																																																																																																					

● Best ○ Better ○ Good

Ordering Example:

The customer needs the following:


- Straight fluted 9000 series reamer head
- Fixed style
- Carbide
- TiN coating
- G lead-in
- Half circular face
- 25.000 mm diameter
- H7 tolerance +0 / +0.021 mm for 25.000 mm diameter

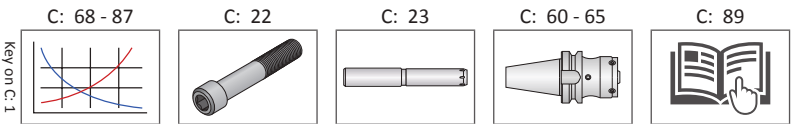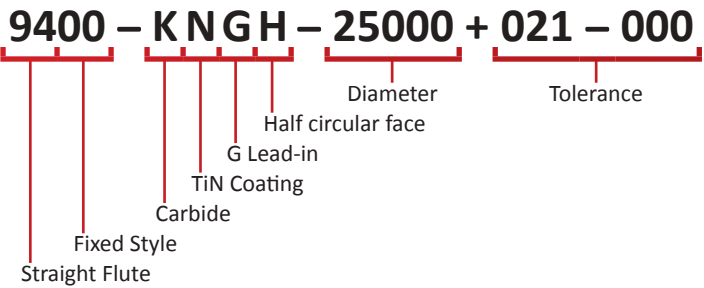




Replaceable Head Screws

Fixed | 9000 Series

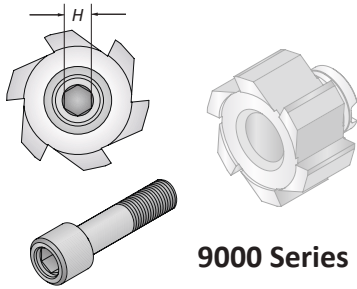

9000 Series

D ₁ Range (mm)	D ₁ Range (inch)	Part No.	H (mm)
11.800 - 14.609	0.4646 - 0.5751	9000-VI-001	2.5
14.610 - 17.609	0.5752 - 0.6932	9000-VI-002	3
17.610 - 21.609	0.6933 - 0.8507	9000-VI-003	4
21.610 - 26.609	0.8508 - 1.0475	9000-VI-004	5
26.610 - 32.609	1.0476 - 1.2838	9000-VI-005	6
32.610 - 40.600	1.2839 - 1.5984	9000-VI-006	6

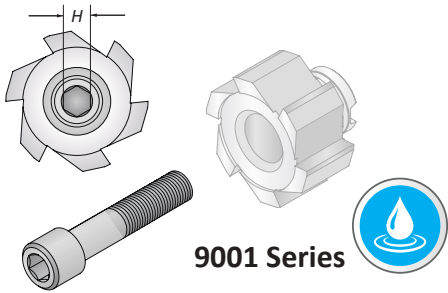

9001 Series

D ₁ Range (mm)	D ₁ Range (inch)	Part No.	H (mm)
11.800 - 14.609	0.4646 - 0.5751	9001-VI-001	2.5
14.610 - 17.609	0.5752 - 0.6932	9001-VI-002	3
17.610 - 21.609	0.6933 - 0.8507	9001-VI-003	4
21.610 - 26.609	0.8508 - 1.0475	9001-VI-004	5
26.610 - 32.609	1.0476 - 1.2838	9001-VI-005	6
32.610 - 40.600	1.2839 - 1.5984	9001-VI-006	6



C: 68 - 87

C: 21

C: 23

C: 60 - 65

C: 89

Key on C: 1

Replaceable Head Mandrels

9000 Series | Diameter Range: 11.800 mm - 40.600 mm (0.4646" - 1.5984")

A

DRILLING

B

BORING

C

REAMING

D


BURNISHING

E

THREADING

X

SPECIALS

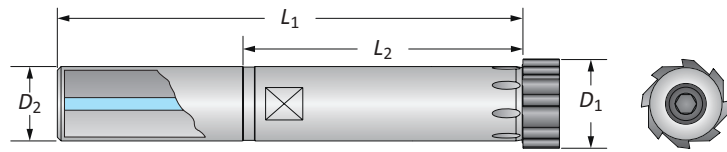


Cylindrical Shank | Short

D ₁ Range		Mandrel			No. of Teeth	Part No.
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)		
11.800 - 14.609	0.4646 - 0.5751	50.00	95.00	12.00	6	9000-MC-001
14.610 - 17.609	0.5752 - 0.6932	65.00	113.00	16.00	6	9000-MC-002
17.610 - 21.609	0.6933 - 0.8507	75.00	125.00	20.00	6	9000-MC-003
21.610 - 26.609	0.8508 - 1.0475	85.00	135.00	20.00	8	9000-MC-004
26.610 - 32.609	1.0476 - 1.2838	105.00	161.00	25.00	8	9000-MC-005
32.610 - 36.609	1.2839 - 1.4412	120.00	180.00	32.00	10	9000-MC-006
36.610 - 40.600	1.4413 - 1.5984	120.00	180.00	32.00	10	9000-MC-007


Cylindrical Shank | Long

D ₁ Range		Mandrel			No. of Teeth	Part No.
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)		
11.800 - 14.609	0.4646 - 0.5751	95.00	140.00	12.00	6	9000-ML-001
14.610 - 17.609	0.5752 - 0.6932	105.00	153.00	16.00	6	9000-ML-002
17.610 - 21.609	0.6933 - 0.8507	125.00	175.00	20.00	6	9000-ML-003
21.610 - 26.609	0.8508 - 1.0475	145.00	195.00	20.00	8	9000-ML-004
26.610 - 32.609	1.0476 - 1.2838	165.00	221.00	25.00	8	9000-ML-005
32.610 - 36.609	1.2839 - 1.4412	185.00	245.00	32.00	10	9000-ML-006
36.610 - 40.600	1.4413 - 1.5984	185.00	245.00	32.00	10	9000-ML-007

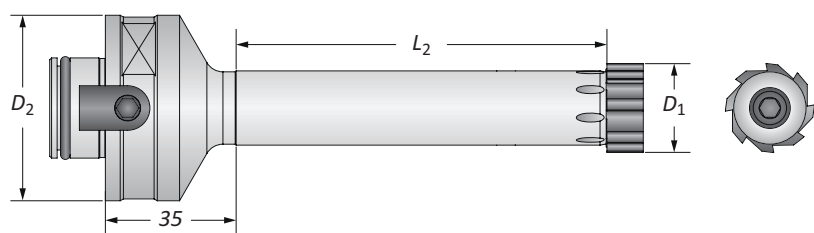

Modular Shank | Standard

D ₁ Range		Mandrel		No. of Teeth	Part No.
Metric (mm)	Imperial (in)	L ₂ (mm)	D ₂ (mm)		
11.800 - 14.609	0.4646 - 0.5751	65.00	50.00	6	9000-MM-001
14.610 - 17.609	0.5752 - 0.6932	80.00	50.00	6	9000-MM-002
17.610 - 21.609	0.6933 - 0.8507	100.00	50.00	6	9000-MM-003
21.610 - 26.609	0.8508 - 1.0475	110.00	50.00	8	9000-MM-004
26.610 - 32.609	1.0476 - 1.2838	120.00	50.00	8	9000-MM-005
32.610 - 36.609	1.2839 - 1.4412	120.00	50.00	10	9000-MM-006
36.610 - 40.600	1.4413 - 1.5984	120.00	50.00	10	9000-MM-007

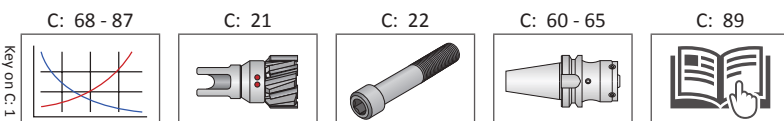

Replaceable Head Reamers

5000 SERIES

9.600 mm - 32.600 mm (0.3780" - 1.2835")

- ▶ Features expandable diameter heads.
- ▶ Heads arrive set to finish diameter and specified tolerance.
- ▶ Twist-lock heads for precision locating of the head to the mandrel.
- ▶ Best TIR repeatability from head to head providing consistent tool wear and maximised tool life.
- ▶ Available with brazed carbide or cermet cutting edges.



Lead Time in Work Days

5000 Series	2 - 9 pcs	10 - 49 pcs	50 - 99 pcs	100+ pcs
Coated	20	25	30	35
Uncoated	15	20	25	30

Building Your Complete Tool

You will need both pieces to complete your replaceable head reamer assembly. The complete mandrel item numbers are listed on their respective pages. However, there is a guide on the pages where the heads are located. You must follow the guide to build the item number for the reamer head that you need.

The 5000 series reamers use a twist lock on reamer head, so the screw is included with the head assembly.

1

Select Your Head



2

Select Your Mandrel





Replaceable Heads

Expandable | 5000 Series

Build Your Part No.																																																																																																																									
1 Series	5400 Series Radial Coolant	5401 Series Central Coolant	5600 Series Central Coolant				5700 Series Radial Coolant																																																																																																																		
2 Flute Style	Straight Flute		Helical Flute (Right-Hand)				Helical Flute (Left-Hand)																																																																																																																		
3 Carbide Grade and Coating Codes																																																																																																																									
		Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating																																																																																																																
	Carbide	KL	KN	KC	KA	KK	KH	KR	KT																																																																																																																
	Cermet	SV	SN	SC	SA	SK	SH	SR	ST																																																																																																																
4 Lead-in Recommendations	<table><tr><td></td><td>T</td><td>F</td><td>N</td><td>G</td><td>L</td><td>A</td><td>V</td><td>K</td></tr><tr><td>P</td><td></td><td></td><td>●</td><td>●</td><td></td><td>○</td><td>○</td><td>○</td></tr><tr><td>S</td><td>●</td><td></td><td></td><td>○</td><td></td><td></td><td></td><td></td></tr><tr><td>M</td><td></td><td></td><td>○</td><td>●</td><td></td><td></td><td></td><td>○</td></tr><tr><td>H</td><td></td><td></td><td>○</td><td>●</td><td></td><td></td><td></td><td></td></tr><tr><td>K</td><td></td><td></td><td></td><td>○</td><td></td><td></td><td>●</td><td>○</td></tr><tr><td>N</td><td></td><td></td><td></td><td>●</td><td></td><td></td><td>○</td><td></td></tr></table>			T	F	N	G	L	A	V	K	P			●	●		○	○	○	S	●			○					M			○	●				○	H			○	●					K				○			●	○	N				●			○		<table><tr><td></td><td>E</td><td>M</td><td>K</td></tr><tr><td>P</td><td>●</td><td></td><td>○</td></tr><tr><td>S</td><td>●</td><td>○</td><td></td></tr><tr><td>M</td><td>●</td><td></td><td>○</td></tr><tr><td>H</td><td>○</td><td>●</td><td></td></tr><tr><td>K</td><td>○</td><td>●</td><td>○</td></tr><tr><td>N</td><td>●</td><td>○</td><td></td></tr></table>					E	M	K	P	●		○	S	●	○		M	●		○	H	○	●		K	○	●	○	N	●	○		<table><tr><td></td><td>E</td><td>M</td></tr><tr><td>P</td><td>●</td><td></td></tr><tr><td>S</td><td>●</td><td>○</td></tr><tr><td>M</td><td>●</td><td></td></tr><tr><td>H</td><td>○</td><td>●</td></tr><tr><td>K</td><td>○</td><td>●</td></tr><tr><td>N</td><td>●</td><td>○</td></tr></table>				E	M	P	●		S	●	○	M	●		H	○	●	K	○	●	N	●	○
		T	F	N	G	L	A	V	K																																																																																																																
P			●	●		○	○	○																																																																																																																	
S	●			○																																																																																																																					
M			○	●				○																																																																																																																	
H			○	●																																																																																																																					
K				○			●	○																																																																																																																	
N				●			○																																																																																																																		
	E	M	K																																																																																																																						
P	●		○																																																																																																																						
S	●	○																																																																																																																							
M	●		○																																																																																																																						
H	○	●																																																																																																																							
K	○	●	○																																																																																																																						
N	●	○																																																																																																																							
	E	M																																																																																																																							
P	●																																																																																																																								
S	●	○																																																																																																																							
M	●																																																																																																																								
H	○	●																																																																																																																							
K	○	●																																																																																																																							
N	●	○																																																																																																																							
5 Optional Add-ons	Add-on		Indicator	Description																																																																																																																					
	Half Circular Face		H	Provides improved tool life in materials over 25 Rc.																																																																																																																					
	Double Back Taper		X	Provides improved tool life in materials over 25 Rc but should not be used in applications requiring less than a 32 Ra surface finish.																																																																																																																					
6 Diameter	<table><tr><th colspan="4">Metric (mm)</th><th colspan="4">Imperial (in)</th></tr><tr><th>D₁ Range</th><th colspan="3">Tolerance (min/max)</th><th>D₁ Range</th><th colspan="3">Tolerance (min/max)</th></tr><tr><td>9.600 - 11.609</td><td colspan="3" rowspan="6">-0.005 / +0.005</td><td>0.3780 - 0.4570</td><td colspan="3" rowspan="6">-0.0002 / +0.0002</td></tr><tr><td>11.610 - 14.609</td></tr><tr><td>14.610 - 17.609</td></tr><tr><td>17.610 - 21.609</td></tr><tr><td>21.610 - 26.609</td></tr><tr><td>26.610 - 32.600</td></tr><tr><td colspan="4"></td><td>1.0476 - 1.2835</td><td colspan="3"></td></tr></table>									Metric (mm)				Imperial (in)				D ₁ Range	Tolerance (min/max)			D ₁ Range	Tolerance (min/max)			9.600 - 11.609	-0.005 / +0.005			0.3780 - 0.4570	-0.0002 / +0.0002			11.610 - 14.609	14.610 - 17.609	17.610 - 21.609	21.610 - 26.609	26.610 - 32.600					1.0476 - 1.2835																																																																														
	Metric (mm)				Imperial (in)																																																																																																																				
	D ₁ Range	Tolerance (min/max)			D ₁ Range	Tolerance (min/max)																																																																																																																			
	9.600 - 11.609	-0.005 / +0.005			0.3780 - 0.4570	-0.0002 / +0.0002																																																																																																																			
	11.610 - 14.609																																																																																																																								
	14.610 - 17.609																																																																																																																								
	17.610 - 21.609																																																																																																																								
	21.610 - 26.609																																																																																																																								
26.610 - 32.600																																																																																																																									
				1.0476 - 1.2835																																																																																																																					

● Best ○ Better ○ Good

Ordering Example:

The customer needs the following:

- Straight fluted 5000 series reamer head
- Central coolant configuration (blind holes)
- Fixed style
- Carbide
- TiN coating
- G lead-in
- Half circular face
- 25.000 mm diameter
- -0.005 mm / +0.005 mm tolerance for 25.000 mm diameter

5401 – K N G H – 25000 + 005 – 005

Flute Style Coolant Configuration Coating Lead-in Face Diameter Tolerance

C: 68 - 87


C: 26

C: 60 - 65

C: 90

**Replaceable Head Mandrels**


5000 Series | Diameter Range: 9.600 mm - 32.600 mm (0.3780" - 1.2835")

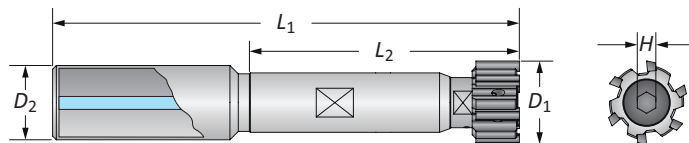**Cylindrical Shank | Short**

D ₁ Range		Mandrel			H	No. of Teeth	Part No.	Wrench
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)	(mm)			
9.600 - 11.609	0.3780 - 0.4570	50.00	95.00	12.00	3	6	5000-MC-001	5000-CH-007
11.610 - 14.609	0.4571 - 0.5751	50.00	95.0	12.00	3.5	6	5000-MC-002	5000-CH-008
14.610 - 17.609	0.5752 - 0.6932	65.00	113.00	16.00	4	6	5000-MC-003	5000-CH-010
17.610 - 21.609	0.6933 - 0.8507	75.00	125.00	20.00	5	6	5000-MC-004	5000-CH-012
21.610 - 26.609	0.8508 - 1.0475	85.00	135.00	20.00	6	6	5000-MC-005	5000-CH-015
26.610 - 32.600	1.0476 - 1.2835	105.00	161.00	25.00	8	6	5000-MC-006	5000-CH-019

Cylindrical Shank | Long

D ₁ Range		Mandrel			H	No. of Teeth	Part No.	Wrench
Metric (mm)	Imperial (in)	L ₂ (mm)	L ₁ (mm)	D ₂ (mm)	(mm)			
9.600 - 11.609	0.3780 - 0.4570	95.00	140.00	12.00	3	6	5000-ML-001	5000-CH-007
11.610 - 14.609	0.4571 - 0.5751	95.00	140.00	12.00	3.5	6	5000-ML-002	5000-CH-008
14.610 - 17.609	0.5752 - 0.6932	105.00	153.00	16.00	4	6	5000-ML-003	5000-CH-010
17.610 - 21.609	0.6933 - 0.8507	125.00	175.00	20.00	5	6	5000-ML-004	5000-CH-012
21.610 - 26.609	0.8508 - 1.0475	145.00	195.00	20.00	6	6	5000-ML-005	5000-CH-015
26.610 - 32.600	1.0476 - 1.2835	165.00	221.00	25.00	8	6	5000-ML-006	5000-CH-019

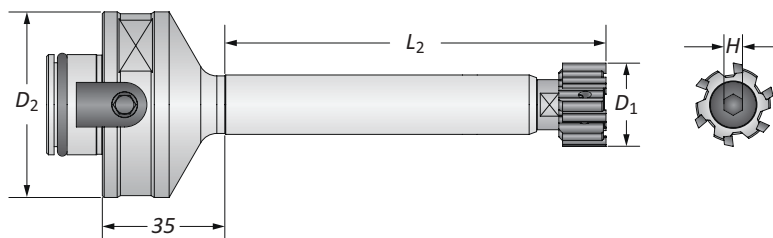**Modular Shank | Standard**




D ₁ Range		Mandrel	H	No. of Teeth	Part No.	Wrench
Metric (mm)	Imperial (in)	L ₂ (mm)	(mm)			
9.600 - 11.609	0.3780 - 0.4570	65.00	3	6	5000-MM-001	5000-CH-007
11.610 - 14.609	0.4571 - 0.5751	65.00	3.5	6	5000-MM-002	5000-CH-008
14.610 - 17.609	0.5752 - 0.6932	80.00	4	6	5000-MM-003	5000-CH-010
17.610 - 21.609	0.6933 - 0.8507	100.00	5	6	5000-MM-004	5000-CH-012
21.610 - 26.609	0.8508 - 1.0475	110.00	6	6	5000-MM-005	5000-CH-015
26.610 - 32.600	1.0476 - 1.2835	120.00	8	6	5000-MM-006	5000-CH-019

C: 68 - 87

C: 25

C: 60 - 65

C: 90




Monobloc Style Reamers


Product Overview

Monobloc Reamer Features

- Diameter range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")
- Available with straight or left-hand helical flutes
- Expandable up to 1% of nominal diameter
- Available with cylindrical shanks only
- Work day lead time 15 - 25 days (quantity dependent)
- Available for recondition



Straight Flute



Left-Hand Helical Flute



Uncoated



TiN Coated



TiAlN Coated



TiCN Coated



Alcrona Coated



Hardcut Coated




R Coated




T Coated

Straight Flute - Through or Blind Holes

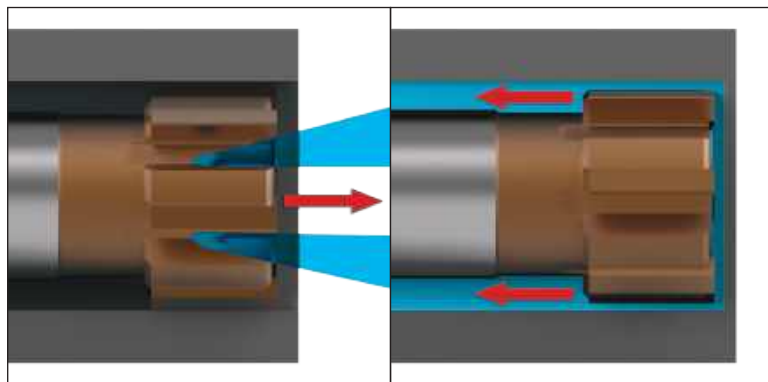

Use for either through hole or blind hole applications. The coolant flow determines the direction of the chip evacuation.

Left-Hand Helical Flute - Through Holes Only

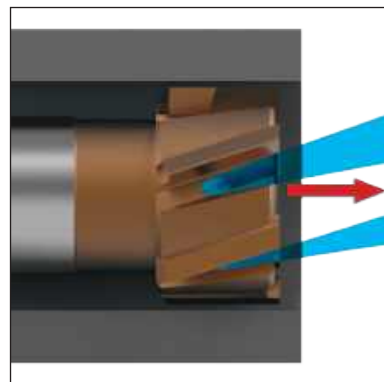

Use when reaming through hole applications. The cutting action of the helical flutes forces the chips forward for evacuation.

Product Nomenclature

Monobloc Style Reamers


I	9	3627	–	KL	E	–	006250	+	0000	–	0005
1	2	3		4	5		6		7		

NOTE: If diameter and tolerance are specified in inch units, put an “I” at the beginning of the item number

1. Diameter Unit of Measure Blank = Metric diameter (mm) I = Imperial diameter (in)	2. Shank Measure Blank = Metric 9 = Inch	3. Series 2441 = Short length, straight flute - central coolant (blind holes) 3620 = Short length, straight flute - radial coolant (through holes) 3627 = Short length, helical flute - radial coolant (through holes) 2431 = Long length, straight flute - central coolant (blind holes) 3610 = Long length, straight flute - radial coolant (through holes) 3617 = Long length, helical flute - radial coolant (through holes)
4. Coating and Substrate KL = Uncoated carbide KN = TiN coated carbide KC = TiCN coated carbide KA = TiAlN coated carbide KK = Alcrona coated carbide KH = Hardcut coated carbide KR = R coated carbide KT = T coated carbide SV = Uncoated cermet SN = TiN coated cermet SC = TiCN coated cermet SA = TiAlN coated cermet SK = Alcrona coated cermet SH = Hardcut coated cermet SR = R coated cermet ST = T coated cermet		5. Lead-in E, M = Left-hand helical flute A, F, G, L, N, T, V, K = Straight flute K = Chipbreaker geometry for straight or helical flute
6. Diameter XXX.XXX = Metric (mm) XX.XXXX = Imperial (inch)		7. Tolerance* 3 decimal places = mm tolerance 4 decimal places = inch tolerance *The total tolerance capable is 0.005 mm (0.0002")

Reference Key


Symbol	Attribute
D₁	Reamer diameter
D₂	Shank diameter
L₁	Overall length
L₂	Body length
L₁₅	Cutting edge length
H	Hex key

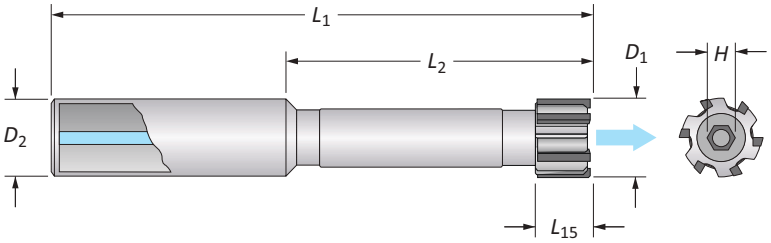



Monobloc Reamers

2441 Series | Short Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

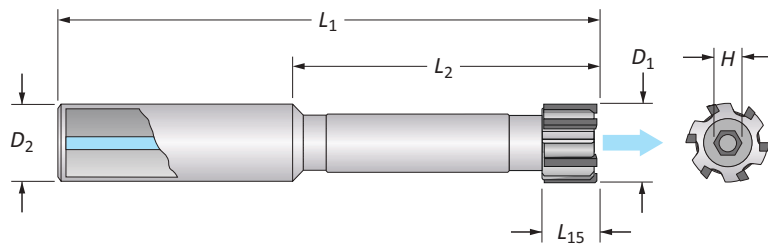

Series	2441		Flute	Straight		Application	Blind Holes		Coolant	Central	
Metric Shank Part No. 2441-XXX-D ₁ +XXXX-XXXX					Inch Shank Part No. 92441-XXX-D ₁ +XXXX-XXXX					No. of Teeth	H (mm)
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	40	80	12	0.2283 - 0.2602	0.315	1.575	3.071	0.500	4	1.5
6.610 - 7.609	8	40	80	12	0.2603 - 0.2996	0.315	1.575	3.071	0.500	4	2
7.610 - 8.609	10	40	80	12	0.2997 - 0.3389	0.394	1.575	3.071	0.500	4	2.5
8.610 - 9.609	10	50	90	12	0.3390 - 0.3783	0.394	1.969	3.465	0.500	4	2.5
9.610 - 10.609	10	50	95	12	0.3784 - 0.4177	0.394	1.969	3.740	0.500	6	3
10.610 - 11.609	10	60	105	12	0.4178 - 0.4570	0.394	1.969	3.740	0.500	6	3
11.610 - 12.609	10	60	105	12	0.4571 - 0.4964	0.394	1.969	3.740	0.500	6	3
12.610 - 13.609	10	60	105	12	0.4965 - 0.5358	0.394	1.969	3.740	0.500	6	4
13.610 - 14.609	10	70	115	12	0.5359 - 0.5752	0.394	1.969	3.740	0.500	6	4
14.610 - 15.609	10	70	115	12	0.5753 - 0.6145	0.394	1.969	3.740	0.500	6	4
15.610 - 16.609	10	80	130	16	0.6146 - 0.6539	0.394	1.969	3.937	0.625	6	4
16.610 - 17.609	10	80	130	16	0.6540 - 0.6933	0.394	1.969	3.937	0.625	6	5
17.610 - 18.609	12	90	140	16	0.6934 - 0.7326	0.472	1.969	3.937	0.625	6	5
18.610 - 19.109	12	90	150	20	0.7327 - 0.7523	0.472	2.362	4.724	0.750	6	5
19.110 - 20.109	12	100	160	20	0.7524 - 0.7917	0.472	2.362	4.724	0.750	6	5
20.110 - 21.109	12	100	160	20	0.7918 - 0.8311	0.472	2.362	4.724	0.750	6	5
21.110 - 22.109	12	100	160	20	0.8312 - 0.8704	0.472	2.362	4.724	0.750	6	6
22.110 - 23.109	12	100	160	20	0.8705 - 0.9098	0.472	2.362	4.724	0.750	6	6
23.110 - 24.109	12	100	160	20	0.9099 - 0.9492	0.472	2.362	4.724	0.750	6	6
24.110 - 25.109	12	100	160	20	0.9493 - 0.9885	0.472	2.362	4.724	0.750	6	6
25.110 - 26.109	16	110	170	25	0.9886 - 1.0279	0.472	2.953	5.315	1.000	6	6
26.110 - 27.109	16	110	170	25	1.0280 - 1.0673	0.551	2.953	5.315	1.000	6	6
27.110 - 28.109	16	110	170	25	1.0674 - 1.1067	0.551	2.953	5.315	1.000	6	8
28.110 - 29.109	16	110	170	25	1.1068 - 1.1460	0.551	2.953	5.315	1.000	6	8
29.110 - 30.109	16	110	170	25	1.1461 - 1.1854	0.551	2.953	5.315	1.000	6	8
30.110 - 31.109	16	110	170	25	1.1855 - 1.2248	0.551	2.953	5.315	1.000	6	8
31.110 - 32.100	16	110	170	25	1.2249 - 1.2638	0.551	2.953	5.315	1.000	6	8

Coating and Substrate Code (Part No. 2441-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 2441-XXX-D₁+XXXX-XXXX)

ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good

Ordering Example

The customer needs:

- Metric shank
- Carbide
- TiN coating
- F lead-in
- 30.60 mm diameter
- Blind hole
- ±0.005 mm tolerance

2441-KNF-030600+005-005

2441 Series - Metric Shank




K Carbide

N TiN Coating

F Lead-in


030600 Diameter

+005 Tolerance



Monobloc Reamers

3620 Series | Short Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

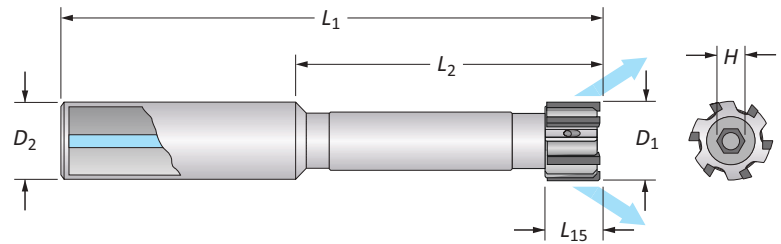

Series	3620	Flute	Straight	Application	Through Holes	Coolant	Radial				
Metric Shank					Inch Shank					No. of Teeth	H (mm)
Part No. 3620-XXX-D ₁ +XXXX-XXXX					Part No. 93620-XXX-D ₁ +XXXX-XXXX						
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	40	78	12	0.2283 - 0.2602	0.315	1.575	3.071	0.500	4	1.5
6.610 - 7.609	8	40	78	12	0.2603 - 0.2996	0.315	1.575	3.071	0.500	4	2
7.610 - 8.609	10	40	78	12	0.2997 - 0.3389	0.394	1.575	3.071	0.500	4	2.5
8.610 - 9.609	10	50	88	12	0.3390 - 0.3783	0.394	1.969	3.465	0.500	4	2.5
9.610 - 10.609	10	50	95	12	0.3784 - 0.4177	0.394	1.969	3.740	0.500	6	3
10.610 - 11.609	10	50	95	12	0.4178 - 0.4570	0.394	1.969	3.740	0.500	6	3
11.610 - 12.609	10	50	95	12	0.4571 - 0.4964	0.394	1.969	3.740	0.500	6	3
12.610 - 13.609	10	50	95	12	0.4965 - 0.5358	0.394	1.969	3.740	0.500	6	4
13.610 - 14.609	10	50	95	12	0.5359 - 0.5752	0.394	1.969	3.740	0.500	6	4
14.610 - 15.609	10	50	95	12	0.5753 - 0.6145	0.394	1.969	3.740	0.500	6	4
15.610 - 16.609	10	50	100	16	0.6146 - 0.6539	0.394	1.969	3.937	0.625	6	4
16.610 - 17.609	10	50	100	16	0.6540 - 0.6933	0.394	1.969	3.937	0.625	6	5
17.610 - 18.609	12	50	100	16	0.6934 - 0.7326	0.472	1.969	3.937	0.625	6	5
18.610 - 19.109	12	60	120	20	0.7327 - 0.7523	0.472	2.362	4.724	0.750	6	5
19.110 - 20.109	12	60	120	20	0.7524 - 0.7917	0.472	2.362	4.724	0.750	6	5
20.110 - 21.109	12	60	120	20	0.7918 - 0.8311	0.472	2.362	4.724	0.750	6	5
21.110 - 22.109	12	60	120	20	0.8312 - 0.8704	0.472	2.362	4.724	0.750	6	6
22.110 - 23.109	12	60	120	20	0.8705 - 0.9098	0.472	2.362	4.724	0.750	6	6
23.110 - 24.109	12	60	120	20	0.9099 - 0.9492	0.472	2.362	4.724	0.750	6	6
24.110 - 25.109	12	60	120	20	0.9493 - 0.9885	0.472	2.362	4.724	0.750	6	6
25.110 - 26.109	16	70	135	25	0.9886 - 1.0279	0.472	2.953	5.315	1.000	6	6
26.110 - 27.109	16	70	135	25	1.0280 - 1.0673	0.551	2.953	5.315	1.000	6	6
27.110 - 28.109	16	70	135	25	1.0674 - 1.1067	0.551	2.953	5.315	1.000	6	8
28.110 - 29.109	16	70	135	25	1.1068 - 1.1460	0.551	2.953	5.315	1.000	6	8
29.110 - 30.109	16	70	135	25	1.1461 - 1.1854	0.551	2.953	5.315	1.000	6	8
30.110 - 31.109	16	70	135	25	1.1855 - 1.2248	0.551	2.953	5.315	1.000	6	8
31.110 - 32.100	16	70	135	25	1.2249 - 1.2638	0.551	2.953	5.315	1.000	6	8

Coating and Substrate Code (Part No. 3620-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 3620-XXX-D₁+XXXX-XXXX)

ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good


Ordering Example

The customer needs:

- Metric shank
- Carbide
- TiN coating
- F lead-in
- 30.60 mm diameter
- Through hole
- ±0.005 mm tolerance

3620-KNF-030600+005-005


3620 Series - Metric Shank
 F Lead-in
 TiN Coating
 Carbide
 Diameter
 Tolerance





Monobloc Reamers

3627 Series | Short Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

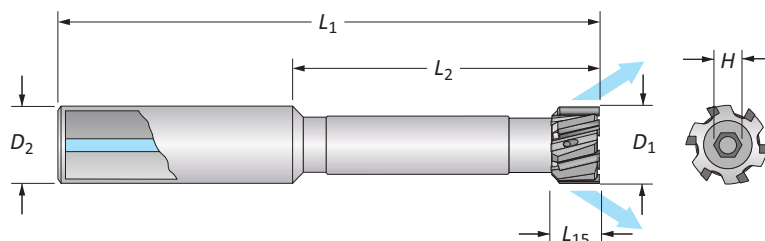

Series	3627	Flute	Helical	Application	Through Holes	Coolant	Radial				
Metric Shank					Inch Shank					No. of Teeth	H (mm)
Part No. 3627-XXX-D ₁ +XXXX-XXXX					Part No. 93627-XXX-D ₁ +XXXX-XXXX						
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	40	80	12	0.2283 - 0.2602	0.315	1.575	3.150	0.500	4	1.5
6.610 - 7.609	8	40	80	12	0.2603 - 0.2996	0.315	1.575	3.150	0.500	4	2
7.610 - 8.609	10	40	80	12	0.2997 - 0.3389	0.394	1.575	3.150	0.500	4	2.5
8.610 - 9.609	10	50	90	12	0.3390 - 0.3783	0.394	1.969	3.543	0.500	4	2.5
9.610 - 10.609	10	50	95	12	0.3784 - 0.4177	0.394	1.969	3.740	0.500	6	3
10.610 - 11.609	10	60	105	12	0.4178 - 0.4570	0.394	2.362	4.134	0.500	6	3
11.610 - 12.609	10	60	105	12	0.4571 - 0.4964	0.394	2.362	4.134	0.500	6	3
12.610 - 13.609	10	60	105	12	0.4965 - 0.5358	0.394	2.362	4.134	0.500	6	4
13.610 - 14.609	10	70	115	12	0.5359 - 0.5752	0.394	2.756	4.528	0.500	6	4
14.610 - 15.609	10	70	115	12	0.5753 - 0.6145	0.394	2.756	4.528	0.500	6	4
15.610 - 16.609	10	80	130	16	0.6146 - 0.6539	0.394	3.150	5.118	0.625	6	4
16.610 - 17.609	10	80	130	16	0.6540 - 0.6933	0.394	3.150	5.118	0.625	6	5
17.610 - 18.609	12	90	140	16	0.6934 - 0.7326	0.472	3.543	5.512	0.625	6	5
18.610 - 19.109	12	90	150	20	0.7327 - 0.7523	0.472	3.543	5.906	0.750	6	5
19.110 - 20.109	12	100	160	20	0.7524 - 0.7917	0.472	3.937	6.299	0.750	6	5
20.110 - 21.109	12	100	160	20	0.7918 - 0.8311	0.472	3.937	6.299	0.750	6	5
21.110 - 22.109	12	100	160	20	0.8312 - 0.8704	0.472	3.937	6.299	0.750	6	6
22.110 - 23.109	12	100	160	20	0.8705 - 0.9098	0.472	3.937	6.299	0.750	6	6
23.110 - 24.109	12	100	160	20	0.9099 - 0.9492	0.472	3.937	6.299	0.750	6	6
24.110 - 25.109	12	100	160	20	0.9493 - 0.9885	0.472	3.937	6.299	0.750	6	6
25.110 - 26.109	16	110	170	25	0.9886 - 1.0279	0.472	4.331	6.693	1.000	6	6
26.110 - 27.109	16	110	170	25	1.0280 - 1.0673	0.551	4.331	6.693	1.000	6	6
27.110 - 28.109	16	110	170	25	1.0674 - 1.1067	0.551	4.331	6.693	1.000	6	8
28.110 - 29.109	16	110	170	25	1.1068 - 1.1460	0.551	4.331	6.693	1.000	6	8
29.110 - 30.109	16	110	170	25	1.1461 - 1.1854	0.551	4.331	6.693	1.000	6	8
30.110 - 31.109	16	110	170	25	1.1855 - 1.2248	0.551	4.331	6.693	1.000	6	8
31.110 - 32.100	16	110	170	25	1.2249 - 1.2638	0.551	4.331	6.693	1.000	6	8

Coating and Substrate Code (Part No. 3627-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 3627-XXX-D₁+XXXX-XXXX)

ISO Material	E	M
P	●	○
S	●	○
M	●	○
H	○	●
K	○	●
N	●	○

● Best ○ Better ○ Good

Ordering Example:

- The customer needs:
- Metric shank
 - Carbide
 - TiN coating
 - F lead-in
 - 30.60 mm diameter
 - Through hole
 - ±0.005 mm tolerance

3627-KNF-030600+005-005

3627 Series - Metric Shank




K Carbide

N TiN Coating

F Lead-in


030600 Diameter

+005 Tolerance



Monobloc Reamers

2431 Series | Long Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

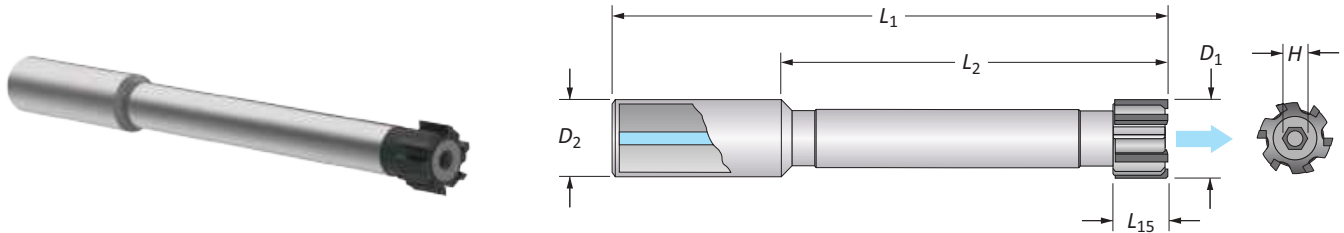

Series	2431	Flute	Straight	Application	Blind Holes	Coolant	Central				
Metric Shank					Inch Shank					No. of Teeth	H (mm)
Part No. 2431-XXX-D ₁ +XXXX-XXXX					Part No. 92431-XXX-D ₁ +XXXX-XXXX						
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	85	123	12	0.2283 - 0.2602	0.315	3.346	4.843	0.500	4	1.5
6.610 - 7.609	8	85	123	12	0.2603 - 0.2996	0.315	3.346	4.843	0.500	4	2
7.610 - 8.609	10	85	123	12	0.2997 - 0.3389	0.394	3.346	4.843	0.500	4	2.5
8.610 - 9.609	10	85	123	12	0.3390 - 0.3783	0.394	3.346	4.843	0.500	4	2.5
9.610 - 10.609	10	115	160	12	0.3784 - 0.4177	0.394	4.528	6.299	0.500	6	3
10.610 - 11.609	10	115	160	12	0.4178 - 0.4570	0.394	4.528	6.299	0.500	6	3
11.610 - 12.609	10	115	160	12	0.4571 - 0.4964	0.394	4.528	6.299	0.500	6	3
12.610 - 13.609	10	115	160	12	0.4965 - 0.5358	0.394	4.528	6.299	0.500	6	4
13.610 - 14.609	10	115	160	12	0.5359 - 0.5752	0.394	4.528	6.299	0.500	6	4
14.610 - 15.609	10	115	160	12	0.5753 - 0.6145	0.394	4.528	6.299	0.500	6	4
15.610 - 16.609	10	130	180	16	0.6146 - 0.6539	0.394	5.118	7.087	0.625	6	4
16.610 - 17.609	10	130	180	16	0.6540 - 0.6933	0.394	5.118	7.087	0.625	6	5
17.610 - 18.609	12	130	180	16	0.6934 - 0.7326	0.472	5.118	7.087	0.625	6	5
18.610 - 19.109	12	140	200	20	0.7327 - 0.7523	0.472	5.512	7.874	0.750	6	5
19.110 - 20.109	12	140	200	20	0.7524 - 0.7917	0.472	5.512	7.874	0.750	6	5
20.110 - 21.109	12	140	200	20	0.7918 - 0.8311	0.472	5.512	7.874	0.750	6	5
21.110 - 22.109	12	140	200	20	0.8312 - 0.8704	0.472	5.512	7.874	0.750	6	6
22.110 - 23.109	12	140	200	20	0.8705 - 0.9098	0.472	5.512	7.874	0.750	6	6
23.110 - 24.109	12	140	200	20	0.9099 - 0.9492	0.472	5.512	7.874	0.750	6	6
24.110 - 25.109	12	140	200	20	0.9493 - 0.9885	0.472	5.512	7.874	0.750	6	6
25.110 - 26.109	16	150	210	25	0.9886 - 1.0279	0.472	5.906	8.268	1.000	6	6
26.110 - 27.109	16	150	210	25	1.0280 - 1.0673	0.551	5.906	8.268	1.000	6	6
27.110 - 28.109	16	150	210	25	1.0674 - 1.1067	0.551	5.906	8.268	1.000	6	8
28.110 - 29.109	16	150	210	25	1.1068 - 1.1460	0.551	5.906	8.268	1.000	6	8
29.110 - 30.109	16	150	210	25	1.1461 - 1.1854	0.551	5.906	8.268	1.000	6	8
30.110 - 31.109	16	150	210	25	1.1855 - 1.2248	0.551	5.906	8.268	1.000	6	8
31.110 - 32.100	16	150	210	25	1.2249 - 1.2638	0.551	5.906	8.268	1.000	6	8

Coating and Substrate Code (Part No. 2431-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 2431-XXX-D₁+XXXX-XXXX)

ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good

Ordering Example

The customer needs:

- Metric shank
- Carbide
- TiN coating
- F lead-in
- 30.60 mm diameter
- Blind hole
- ±0.005 mm tolerance

2431-KNF-030600+005-005

2431 Series - Metric Shank


F Lead-in

TiN Coating

Carbide


Diameter

Tolerance



Monobloc Reamers

3610 Series | Long Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

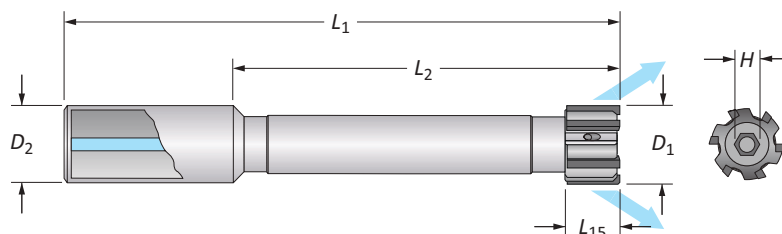

Series	3610	Flute	Straight	Application	Through Holes	Coolant	Radial				
Metric Shank					Inch Shank					No. of Teeth	H (mm)
Part No. 3610-XXX-D ₁ +XXXX-XXXX					Part No. 93610-XXX-D ₁ +XXXX-XXXX						
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	85	123	12	0.2283 - 0.2602	0.315	3.346	4.843	0.500	4	1.5
6.610 - 7.609	8	85	123	12	0.2603 - 0.2996	0.315	3.346	4.843	0.500	4	2
7.610 - 8.609	10	85	123	12	0.2997 - 0.3389	0.394	3.346	4.843	0.500	4	2.5
8.610 - 9.609	10	85	123	12	0.3390 - 0.3783	0.394	3.346	4.843	0.500	4	2.5
9.610 - 10.609	10	115	160	12	0.3784 - 0.4177	0.394	4.528	6.299	0.500	6	3
10.610 - 11.609	10	115	160	12	0.4178 - 0.4570	0.394	4.528	6.299	0.500	6	3
11.610 - 12.609	10	115	160	12	0.4571 - 0.4964	0.394	4.528	6.299	0.500	6	3
12.610 - 13.609	10	115	160	12	0.4965 - 0.5358	0.394	4.528	6.299	0.500	6	4
13.610 - 14.609	10	115	160	12	0.5359 - 0.5752	0.394	4.528	6.299	0.500	6	4
14.610 - 15.609	10	115	160	12	0.5753 - 0.6145	0.394	4.528	6.299	0.500	6	4
15.610 - 16.609	10	130	180	16	0.6146 - 0.6539	0.394	5.118	7.087	0.625	6	4
16.610 - 17.609	10	130	180	16	0.6540 - 0.6933	0.394	5.118	7.087	0.625	6	5
17.610 - 18.609	12	130	180	16	0.6934 - 0.7326	0.472	5.118	7.087	0.625	6	5
18.610 - 19.109	12	140	200	20	0.7327 - 0.7523	0.472	5.512	7.874	0.750	6	5
19.110 - 20.109	12	140	200	20	0.7524 - 0.7917	0.472	5.512	7.874	0.750	6	5
20.110 - 21.109	12	140	200	20	0.7918 - 0.8311	0.472	5.512	7.874	0.750	6	5
21.110 - 22.109	12	140	200	20	0.8312 - 0.8704	0.472	5.512	7.874	0.750	6	6
22.110 - 23.109	12	140	200	20	0.8705 - 0.9098	0.472	5.512	7.874	0.750	6	6
23.110 - 24.109	12	140	200	20	0.9099 - 0.9492	0.472	5.512	7.874	0.750	6	6
24.110 - 25.109	12	140	200	20	0.9493 - 0.9885	0.472	5.512	7.874	0.750	6	6
25.110 - 26.109	16	150	210	25	0.9886 - 1.0279	0.472	5.906	8.268	1.000	6	6
26.110 - 27.109	16	150	210	25	1.0280 - 1.0673	0.551	5.906	8.268	1.000	6	6
27.110 - 28.109	16	150	210	25	1.0674 - 1.1067	0.551	5.906	8.268	1.000	6	8
28.110 - 29.109	16	150	210	25	1.1068 - 1.1460	0.551	5.906	8.268	1.000	6	8
29.110 - 30.109	16	150	210	25	1.1461 - 1.1854	0.551	5.906	8.268	1.000	6	8
30.110 - 31.109	16	150	210	25	1.1855 - 1.2248	0.551	5.906	8.268	1.000	6	8
31.110 - 32.100	16	150	210	25	1.2249 - 1.2638	0.551	5.906	8.268	1.000	6	8

Coating and Substrate Code (Part No. 3610-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 3610-XXX-D₁+XXXX-XXXX)

ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good




Ordering Example

The customer needs:

- Metric shank
- Carbide
- TiN coating
- F lead-in
- 30.60 mm diameter
- Through hole
- ±0.005 mm tolerance


3610-KNF-030600+005-005

3610 Series - Metric Shank
 F Lead-in
 TiN Coating
 Carbide
 Diameter
 Tolerance



Monobloc Reamers

3617 Series | Long Length | Diameter Range: 5.800 mm - 32.100 mm (0.2283" - 1.2638")

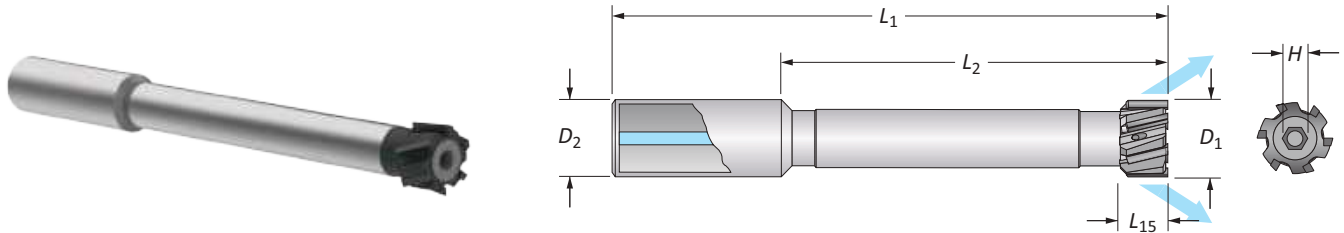

Series	3617	Flute	Helical		Application	Through Holes		Coolant		Radial	
Metric Shank					Inch Shank					No. of Teeth	H (mm)
Part No. 3617-XXX-D ₁ +XXXX-XXXX					Part No. 93617-XXX-D ₁ +XXXX-XXXX						
D ₁ Range	L ₁₅	L ₂	L ₁	D ₂	D ₁ Range	L ₁₅	L ₂	L ₁	D ₂		
5.800 - 6.609	8	85	123	12	0.2283 - 0.2602	0.315	3.346	4.843	0.500	4	1.5
6.610 - 7.609	8	85	123	12	0.2603 - 0.2996	0.315	3.346	4.843	0.500	4	2
7.610 - 8.609	10	85	123	12	0.2997 - 0.3389	0.394	3.346	4.843	0.500	4	2.5
8.610 - 9.609	10	85	123	12	0.3390 - 0.3783	0.394	3.346	4.843	0.500	4	2.5
9.610 - 10.609	10	115	160	12	0.3784 - 0.4177	0.394	4.528	6.299	0.500	6	3
10.610 - 11.609	10	115	160	12	0.4178 - 0.4570	0.394	4.528	6.299	0.500	6	3
11.610 - 12.609	10	115	160	12	0.4571 - 0.4964	0.394	4.528	6.299	0.500	6	3
12.610 - 13.609	10	115	160	12	0.4965 - 0.5358	0.394	4.528	6.299	0.500	6	4
13.610 - 14.609	10	115	160	12	0.5359 - 0.5752	0.394	4.528	6.299	0.500	6	4
14.610 - 15.609	10	115	160	12	0.5753 - 0.6145	0.394	4.528	6.299	0.500	6	4
15.610 - 16.609	10	130	180	16	0.6146 - 0.6539	0.394	5.118	7.087	0.625	6	4
16.610 - 17.609	10	130	180	16	0.6540 - 0.6933	0.394	5.118	7.087	0.625	6	5
17.610 - 18.609	12	130	180	16	0.6934 - 0.7326	0.472	5.118	7.087	0.625	6	5
18.610 - 19.109	12	140	200	20	0.7327 - 0.7523	0.472	5.512	7.874	0.750	6	5
19.110 - 20.109	12	140	200	20	0.7524 - 0.7917	0.472	5.512	7.874	0.750	6	5
20.110 - 21.109	12	140	200	20	0.7918 - 0.8311	0.472	5.512	7.874	0.750	6	5
21.110 - 22.109	12	140	200	20	0.8312 - 0.8704	0.472	5.512	7.874	0.750	6	6
22.110 - 23.109	12	140	200	20	0.8705 - 0.9098	0.472	5.512	7.874	0.750	6	6
23.110 - 24.109	12	140	200	20	0.9099 - 0.9492	0.472	5.512	7.874	0.750	6	6
24.110 - 25.109	12	140	200	20	0.9493 - 0.9885	0.472	5.512	7.874	0.750	6	6
25.110 - 26.109	16	150	210	25	0.9886 - 1.0279	0.472	5.906	8.268	1.000	6	6
26.110 - 27.109	16	150	210	25	1.0280 - 1.0673	0.551	5.906	8.268	1.000	6	6
27.110 - 28.109	16	150	210	25	1.0674 - 1.1067	0.551	5.906	8.268	1.000	6	8
28.110 - 29.109	16	150	210	25	1.1068 - 1.1460	0.551	5.906	8.268	1.000	6	8
29.110 - 30.109	16	150	210	25	1.1461 - 1.1854	0.551	5.906	8.268	1.000	6	8
30.110 - 31.109	16	150	210	25	1.1855 - 1.2248	0.551	5.906	8.268	1.000	6	8
31.110 - 32.100	16	150	210	25	1.2249 - 1.2638	0.551	5.906	8.268	1.000	6	8


Coating and Substrate Code (Part No. 3617-XXX-D₁+XXXX-XXXX)

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	KL	KN	KC	KA	KK	KH	KR	KT
Cermet	SV	SN	SC	SA	SK	SH	SR	ST

Lead-in (Part No. 3617-XXX-D₁+XXXX-XXXX)

ISO Material	E	M
P	●	
S	●	○
M	●	
H	○	●
K	○	●
N	●	○

● Best ○ Better ○ Good

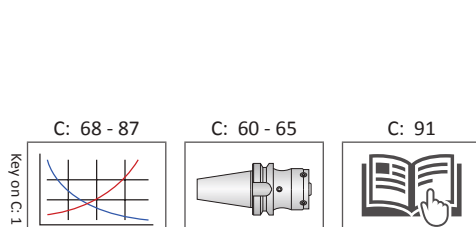

Ordering Example

The customer needs:

- Metric shank
- Carbide
- TiN coating
- F lead-in
- 30.60 mm diameter
- Through hole
- ±0.005 mm tolerance

3617-KNF-030600+005-005

3617 Series - Metric Shank

Lead-in: F Lead-in

Coating: TiN Coating

Material: Carbide

Diameter: 30.60 mm

Tolerance: ±0.005 mm



Cutting Ring Style Reamers

Product Overview

Cutting Ring Reamer Features

- Diameter range: 17.600 mm - 200.600 mm (0.6929" - 7.8976")
- Available with straight or left-hand helical flutes
- Expandable up to 4% of nominal diameter
- Mandrels are available for both through holes or blind holes
- Work day lead time 20 - 25 days
- Available for recondition



Straight Flute



Left-Hand Helical Flute



Uncoated



TiN Coated



TiAlN Coated



TiCN Coated



Alcrona Coated




Hardcut Coated



R Coated



T Coated

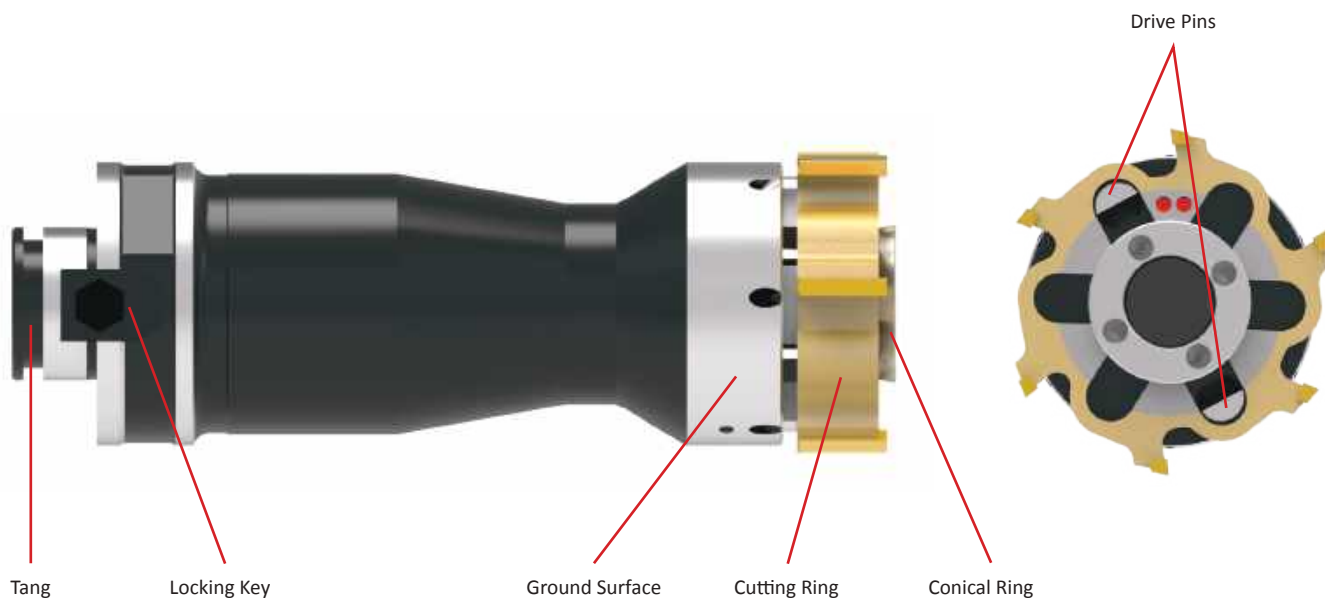

Product Nomenclature

Cutting Rings


I	2ANC-ST	F	-	019686	+	0000	-	0005
1	2	3		4		5		

NOTE: If diameter and tolerance are specified in inch units, put an "I" at the beginning of the item number

1. Diameter Unit of Measure Blank = Metric diameter (mm) I = Imperial diameter (in)	2. Coating and Substrate 2000-KT = Uncoated carbide 2TIN-KT = TiN coated carbide 2TIC-KT = TiCN coated carbide 2TIA-KT = TiAlN coated carbide 2TLK-KT = Alcrona coated carbide 2TLH-KT = Hardcut coated carbide 2TLR-KT = R coated carbide 2TLT-KT = T coated carbide 2AVC-ST = Uncoated cermet 2ANC-ST = TiN coated cermet 2ACC-ST = TiCN coated cermet 2AAC-ST = TiAlN coated cermet 2ALK-ST = Alcrona coated cermet 2TLH-ST = Hardcut coated cermet 2TLR-ST = R coated cermet 2TLT-ST = T coated cermet	
3. Lead-in E, M = Left-hand helical flute A, F, G, L, N, T, V, K = Straight flute K = Chipbreaker geometry for straight or helical flute	4. Diameter XXX.XXX = Metric (mm) XX.XXXX = Imperial (inch)	5. Tolerance 3 decimal places = mm tolerance 4 decimal places = inch tolerance

Reference Key

Symbol	Attribute
D₁	Reamer diameter
D₂	Shank diameter
D₃	Maximum conical ring diameter
L₁	Overall length
L₂	Length of cut
L₅	Maximum overhang
L₇	Shank length
L₁₅	Flute length

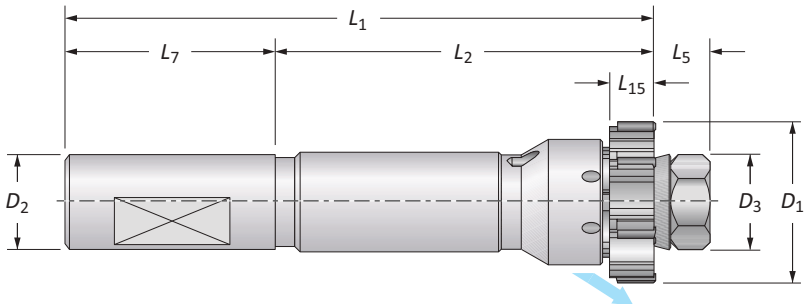

Building Your Complete Tool


You will need both pieces to complete your ring style reamer assembly. There is a guide on the page where the rings are located. You must follow the guide to build the item number for the reamer ring that you need.

However, the complete mandrel item numbers are listed on their respective pages. You do not need to build the mandrel numbers.



1

Select Your Ring



2


Select Your Mandrel





Cutting Rings

Metric (mm) | Diameter Range: 32.600 mm - 200.600 mm



D_1 Range	L_{15}		Number of Teeth
Metric (mm)	Straight Flute	Helical Flute	
32.600 - 45.599	16.00	16.00	6
45.600 - 79.599	18.50	18.50	6
79.600 - 100.599	18.50	18.50	8
100.600 - 110.599	18.50	18.50	10
110.600 - 200.600	18.50	18.50	12

2ANC-ST F - 055298 + 003 - 003

F Lead-in
Cermet with TiN Coating

Diameter

Tolerance

Coating and Substrate Codes

Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	2000-KT	2TIN-KT	2TIC-KT	2TIA-KT	2TLK-KT	2TLH-KT	2TLR-KT	2TLT-KT
Cermet	2AVC-ST	2ANC-ST	2ACC-ST	2AAC-ST	2ALK-ST	2ALH-ST	2ALR-ST	2ALT-ST

Lead-in Recommendation (Straight Flute)


ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good

Lead-in Recommendation (Helical Flute)

ISO Material	E	M
P	●	
S	●	○
M	●	
H	○	●
K	○	●
N	●	○

● Best ○ Better ○ Good

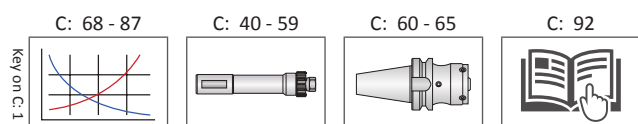

Cutting Rings

Imperial (inch) | Diameter Range: 1.2835" - 7.8976"



D ₁ Range	L ₁₅		Number of Teeth
	Straight Flute	Helical Flute	
Imperial (inch)			
1.2835 - 1.7952	0.630	0.630	6
1.7953 - 3.1338	0.728	0.728	6
3.1339 - 3.9606	0.728	0.728	8
3.9607 - 4.3543	0.728	0.728	10
4.3544 - 7.8976	0.728	0.728	12

I 2ANC-ST F - 019686 + 0002 - 0002

Imperial Diameter | Cermet with TiN Coating | F Lead-in | Diameter | Tolerance

Coating and Substrate Codes

								
Grade	Uncoated	TiN	TiCN	TiAlN	Alcrona	Hardcut	R Coating	T Coating
Carbide	2000-KT	2TIN-KT	2TIC-KT	2TIA-KT	2TLK-KT	2TLH-KT	2TLR-KT	2TLT-KT
Cermet	2AVC-ST	2ANC-ST	2ACC-ST	2AAC-ST	2ALK-ST	2ALH-ST	2ALR-ST	2ALT-ST

Lead-in Recommendation (Straight Flute)


ISO Material	T	F	N	G	L	A	V	K
P			●	●		○	○	○
S	●			○				
M			○	●				○
H			○	●				
K				○			●	○
N				●			○	

● Best ○ Better ○ Good

Lead-in Recommendation (Helical Flute)

ISO Material	E	M
P	●	
S	●	○
M	●	
H	○	●
K	○	●
N	●	○


● Best ○ Better ○ Good





Ring Style Mandrels

4550 Series | Short Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

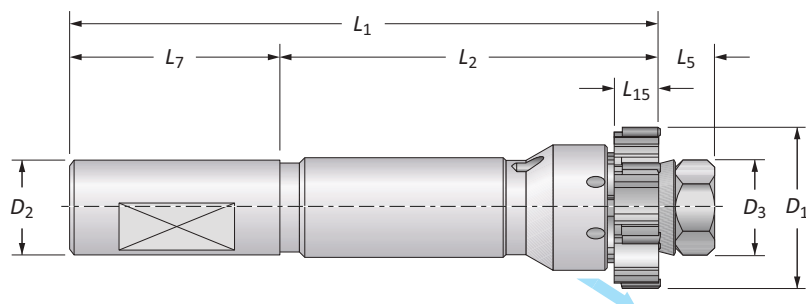


Series	4550	Shank Type	Cylindrical	Application	Through Holes	Coolant	Radial
--------	------	------------	-------------	-------------	---------------	---------	--------

		Mandrel					Shank		Teeth	Part No. (Complete Mandrel^)	
		D_3	L_5	L_{15}	L_2	L_1	L_7	D_2		With Flat	Without Flat
m	D_1 Range										
	17.600 - 21.599	12	11	11	81	142	50	20	6	4550-MC-010*	4550A-MC-010*
	21.600 - 25.599	12	11	12	81	142	50	20	6	4550-MC-020*	4550A-MC-020*
	25.600 - 32.599	15.6	11	14	102	163	50	20	6	4550-MC-030*	4550A-MC-030*
	32.600 - 40.599	22	14	16	102	172	56	25	6	4550-MC-040	4550A-MC-040
	40.600 - 45.599	25.4	15	16	102	173	56	25	6	4550-MC-050	4550A-MC-050
	45.600 - 49.599	30	20.5	18.5	105	185.5	60	32	6	4550-MC-060	4550A-MC-060
	49.600 - 60.599	30	20.5	18.5	105	185.5	60	32	6	4550-MC-070	4550A-MC-070
	60.600 - 70.599	40	24.5	18.5	105	189.5	60	32	6	4550-MC-080	4550A-MC-080
	70.600 - 79.599	40	24.5	18.5	105	189.5	60	32	6	4550-MC-090	4550A-MC-090
79.600 - 90.599	56	28.5	18.5	105	203.5	70	40	8	4550-MC-100	4550A-MC-100	
90.600 - 100.599	56	28.5	18.5	105	203.5	70	40	8	4550-MC-110	4550A-MC-110	
i	0.6929 - 0.8504	0.472	0.433	0.433	3.189	5.591	1.969	0.750	6	94550-MC-010*	94550A-MC-010*
	0.8505 - 1.0078	0.472	0.433	0.472	3.189	5.591	1.969	0.750	6	94550-MC-020*	94550A-MC-020*
	1.0079 - 1.2834	0.614	0.433	0.551	4.016	6.417	1.969	0.750	6	94550-MC-030*	94550A-MC-030*
	1.2835 - 1.5984	0.866	0.551	0.630	4.016	6.772	2.205	1.000	6	94550-MC-040	94550A-MC-040
	1.5985 - 1.7952	1.000	0.591	0.630	4.016	6.811	2.205	1.000	6	94550-MC-050	94550A-MC-050
	1.7953 - 1.9527	1.181	0.807	0.728	4.134	7.303	2.362	1.250	6	94550-MC-060	94550A-MC-060
	1.9528 - 2.3858	1.181	0.807	0.728	4.134	7.303	2.362	1.250	6	94550-MC-070	94550A-MC-070
	2.3859 - 2.7795	1.575	0.965	0.728	4.134	7.461	2.362	1.250	6	94550-MC-080	94550A-MC-080
	2.7796 - 3.1338	1.575	0.965	0.728	4.134	7.461	2.362	1.250	6	94550-MC-090	94550A-MC-090
	3.1339 - 3.5669	2.205	1.122	0.728	4.134	8.012	2.756	1.500	8	94550-MC-100	94550A-MC-100
	3.5670 - 3.9606	2.205	1.122	0.728	4.134	8.012	2.756	1.500	8	94550-MC-110	94550A-MC-110

^Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

m = Metric (mm)
i = Imperial (in)

Ring Style Mandrels


4550 Series | Short Length | Spare Parts



Part No. (Complete Mandrel^)		Spare Parts					
With Flat	Without Flat	Drive Pins	Number of Drive Pins	Conical Ring	Nut	Wrench Size (mm)	
4550-MC-010	4550A-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10	m
4550-MC-020	4550A-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10	
4550-MC-030	4550A-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13	
4550-MC-040	4550A-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19	
4550-MC-050	4550A-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22	
4550-MC-060	4550A-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦	
4550-MC-070	4550A-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦	
4550-MC-080	4550A-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦	
4550-MC-090	4550A-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦	
4550-MC-100	4550A-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦	
4550-MC-110	4550A-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦	
94550-MC-010	94550A-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10	i
94550-MC-020	94550A-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10	
94550-MC-030	94550A-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13	
94550-MC-040	94550A-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19	
94550-MC-050	94550A-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22	
94550-MC-060	94550A-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦	
94550-MC-070	94550A-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦	
94550-MC-080	94550A-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦	
94550-MC-090	94550A-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦	
94550-MC-100	94550A-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦	
94550-MC-110	94550A-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦	

^Complete mandrel does not include cutting ring.

♦ Spanner wrench




m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels

4555 Series | Short Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

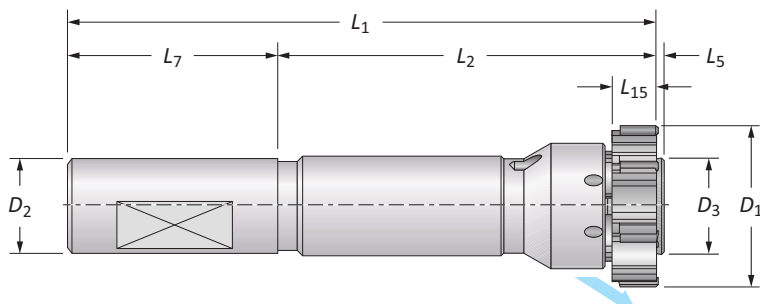

Series		4555		Shank Type		Cylindrical		Application		Blind Holes		Coolant		Radial	
D ₁ Range		Mandrel					Shank		Teeth	Part No. (Complete Mandrel^)					
		D ₃	L ₅	L ₁₅	L ₂	L ₁	L ₇	D ₂		With Flat	Without Flat				
m	17.600 - 21.599	11.2	1	11	81	132	50	20	6	4555-MC-010*	4555A-MC-010*				
	21.600 - 25.599	11.2	1	12	81	132	50	20	6	4555-MC-020*	4555A-MC-020*				
	25.600 - 29.599	15.1	1	14	102	153	50	20	6	4555-MC-030*	4555A-MC-030*				
	29.600 - 32.599	15.1	1	14	102	153	50	20	6	4555-MC-035*	4555A-MC-035*				
	32.600 - 36.599	20.3	1	16	102	159	56	25	6	4555-MC-040	4555A-MC-040				
	36.600 - 40.599	20.3	1	16	102	159	56	25	6	4555-MC-045	4555A-MC-045				
	40.600 - 45.599	24.1	1	16	102	159	56	25	6	4555-MC-050	4555A-MC-050				
	45.600 - 49.599	27.9	1.5	18.5	105	166.5	60	32	6	4555-MC-060	4555A-MC-060				
	49.600 - 55.599	27.9	1.5	18.5	105	166.5	60	32	6	4555-MC-070	4555A-MC-070				
	55.600 - 60.599	27.9	1.5	18.5	105	166.5	60	32	6	4555-MC-075	4555A-MC-075				
	60.600 - 65.599	37.1	1.5	18.5	105	166.5	60	32	6	4555-MC-080	4555A-MC-080				
	65.600 - 70.599	37.1	1.5	18.5	105	166.5	60	32	6	4555-MC-085	4555A-MC-085				
	70.600 - 79.599	37.1	1.5	18.5	105	166.5	60	32	6	4555-MC-090	4555A-MC-090				
79.600 - 90.599	53.1	1.5	18.5	105	176.5	70	40	8	4555-MC-100	4555A-MC-100					
90.600 - 100.599	53.1	1.5	18.5	105	176.5	70	40	8	4555-MC-110	4555A-MC-110					
i	0.6929 - 0.8504	0.441	0.039	0.433	3.189	5.197	1.969	0.750	6	94555-MC-010*	94555A-MC-010*				
	0.8505 - 1.0078	0.441	0.039	0.472	3.189	5.197	1.969	0.750	6	94555-MC-020*	94555A-MC-020*				
	1.0079 - 1.1653	0.594	0.039	0.551	4.016	6.024	1.969	0.750	6	94555-MC-030*	94555A-MC-030*				
	1.1654 - 1.2834	0.594	0.039	0.551	4.016	6.024	1.969	0.750	6	94555-MC-035*	94555A-MC-035*				
	1.2835 - 1.4409	0.799	0.039	0.630	4.016	6.260	2.205	1.000	6	94555-MC-040	94555A-MC-040				
	1.4410 - 1.5984	0.799	0.039	0.630	4.016	6.260	2.205	1.000	6	94555-MC-045	94555A-MC-045				
	1.5985 - 1.7952	0.949	0.039	0.630	4.016	6.260	2.205	1.000	6	94555-MC-050	94555A-MC-050				
	1.7953 - 1.9527	1.098	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-060	94555A-MC-060				
	1.9528 - 2.1889	1.098	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-070	94555A-MC-070				
	2.1890 - 2.3858	1.098	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-075	94555A-MC-075				
	2.3859 - 2.5826	1.461	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-080	94555A-MC-080				
	2.5827 - 2.7795	1.461	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-085	94555A-MC-085				
	2.7796 - 3.1338	1.461	0.059	0.728	4.134	6.555	2.362	1.250	6	94555-MC-090	94555A-MC-090				
3.1339 - 3.5669	2.091	0.059	0.728	4.134	6.949	2.756	1.500	8	94555-MC-100	94555A-MC-100					
3.5670 - 3.9606	2.091	0.059	0.728	4.134	6.949	2.756	1.500	8	94555-MC-110	94555A-MC-110					

[^]Complete mandrel does not include cutting ring.



*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

C: 68 - 87

C: 38 - 39

C: 60 - 65

C: 92



m = Metric (mm)

i = Imperial (in)


Ring Style Mandrels

4555 Series | Short Length | Spare Parts



Part No. (Complete Mandrel^)		Spare Parts						
With Flat	Without Flat	1 Drive Pins	Number of Drive Pins	2 Conical Ring	Conical Ring (2nd Expansion)	Conical Ring (3rd Expansion)	3 Adjusting Key	Wrench Size (mm)
4555-MC-010	4555A-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
4555-MC-020	4555A-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
4555-MC-030	4555A-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
4555-MC-035	4555A-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
4555-MC-040	4555A-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
4555-MC-045	4555A-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
4555-MC-050	4555A-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
4555-MC-060	4555A-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4555-MC-070	4555A-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4555-MC-075	4555A-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4555-MC-080	4555A-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4555-MC-085	4555A-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4555-MC-090	4555A-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4555-MC-100	4555A-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
4555-MC-110	4555A-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
94555-MC-010	94555A-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
94555-MC-020	94555A-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
94555-MC-030	94555A-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
94555-MC-035	94555A-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
94555-MC-040	94555A-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
94555-MC-045	94555A-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
94555-MC-050	94555A-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
94555-MC-060	94555A-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
94555-MC-070	94555A-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
94555-MC-075	94555A-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
94555-MC-080	94555A-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
94555-MC-085	94555A-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
94555-MC-090	94555A-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
94555-MC-100	94555A-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
94555-MC-110	94555A-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46

^Complete mandrel does not include cutting ring.

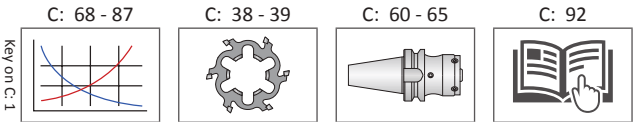


m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels


4500 Series | Long Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

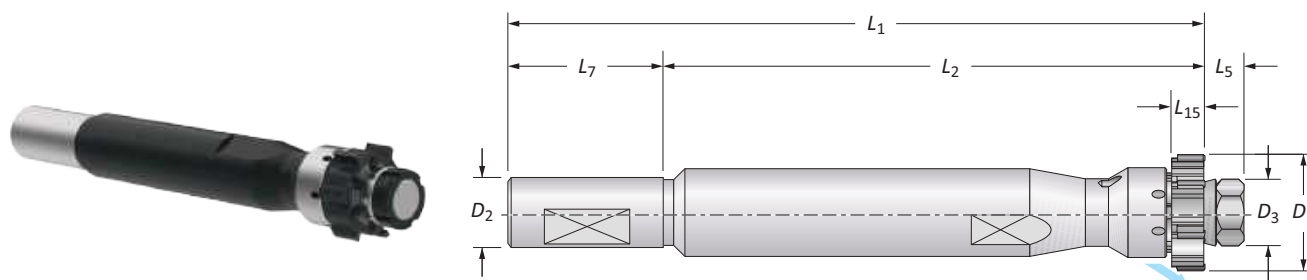

Series		4500	Shank Type		Cylindrical		Application		Through Holes		Coolant		Radial	
		Mandrel					Shank		Teeth	Part No. (Complete Mandrel^)				
D ₁ Range		D ₃	L ₅	L ₁₅	L ₂	L ₁	L ₇	D ₂		With Flat	Without Flat			
m	17.600 - 21.599	12	11	11	121	182	50	20	6	4500-MC-010*	4500A-MC-010*			
	21.600 - 25.599	12	11	12	121	182	50	20	6	4500-MC-020*	4500A-MC-020*			
	25.600 - 32.599	15.6	11	14	153	214	50	20	6	4500-MC-030*	4500A-MC-030*			
	32.600 - 40.599	22	14	16	179	249	56	25	6	4500-MC-040	4500A-MC-040			
	40.600 - 45.599	25.4	15	16	201	272	56	25	6	4500-MC-050	4500A-MC-050			
	45.600 - 49.599	30	20.5	18.5	214	294.5	60	32	6	4500-MC-060	4500A-MC-060			
	49.600 - 60.599	30	20.5	18.5	214	294.5	60	32	6	4500-MC-070	4500A-MC-070			
	60.600 - 70.599	40	24.5	18.5	237	321.5	60	32	6	4500-MC-080	4500A-MC-080			
	70.600 - 79.599	40	24.5	18.5	237	321.5	60	32	6	4500-MC-090	4500A-MC-090			
	79.600 - 90.599	56	28.5	18.5	245	343.5	70	40	6	4500-MC-100	4500A-MC-100			
90.600 - 100.599	56	28.5	18.5	245	343.5	70	40	8	4500-MC-110	4500A-MC-110				
i	0.6929 - 0.8504	0.472	0.433	0.433	4.764	7.165	1.969	0.750	6	94500-MC-010*	94500A-MC-010*			
	0.8505 - 1.0078	0.472	0.433	0.472	4.764	7.165	1.969	0.750	6	94500-MC-020*	94500A-MC-020*			
	1.0079 - 1.2834	0.614	0.433	0.551	6.024	8.425	1.969	0.750	6	94500-MC-030*	94500A-MC-030*			
	1.2835 - 1.5984	0.866	0.551	0.630	7.047	9.803	2.205	1.000	6	94500-MC-040	94500A-MC-040			
	1.5985 - 1.7952	0.866	0.551	0.630	7.047	9.803	2.205	1.000	6	94500-MC-050	94500A-MC-050			
	1.7953 - 1.9527	1.000	0.591	0.630	7.913	10.709	2.205	1.000	6	94500-MC-060	94500A-MC-060			
	1.9528 - 2.3858	1.181	0.807	0.728	8.425	11.594	2.362	1.250	6	94500-MC-070	94500A-MC-070			
	2.3859 - 2.7795	1.575	0.965	0.728	9.331	12.657	2.362	1.250	6	94500-MC-080	94500A-MC-080			
	2.7796 - 3.1338	1.575	0.965	0.728	9.331	12.657	2.362	1.250	6	94500-MC-090	94500A-MC-090			
	3.1339 - 3.5669	2.205	1.122	0.728	9.646	13.524	2.756	1.500	6	94500-MC-100	94500A-MC-100			
	3.5670 - 3.9606	2.205	1.122	0.728	9.646	13.524	2.756	1.500	8	94500-MC-110	94500A-MC-110			

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

m = Metric (mm)
i = Imperial (in)

Ring Style Mandrels


4500 Series | Long Length | Spare Parts



Part No. (Complete Mandrel^)			Spare Parts				
			1		2	3	
	With Flat	Without Flat	Drive Pins	Number of Drive Pins	Conical Ring	Nut	Wrench Size (mm)
m	4500-MC-010	4500A-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10
	4500-MC-020	4500A-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10
	4500-MC-030	4500A-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13
	4500-MC-040	4500A-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19
	4500-MC-050	4500A-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22
	4500-MC-060	4500A-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦
	4500-MC-070	4500A-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦
	4500-MC-080	4500A-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦
	4500-MC-090	4500A-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦
	4500-MC-100	4500A-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦
	4500-MC-110	4500A-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦
i	94500-MC-010	94500A-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10
	94500-MC-020	94500A-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10
	94500-MC-030	94500A-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13
	94500-MC-040	94500A-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19
	94500-MC-050	94500A-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22
	94500-MC-060	94500A-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦
	94500-MC-070	94500A-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦
	94500-MC-080	94500A-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦
	94500-MC-090	94500A-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦
	94500-MC-100	94500A-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦
	94500-MC-110	94500A-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦

^Complete mandrel does not include cutting ring.

♦ Spanner wrench

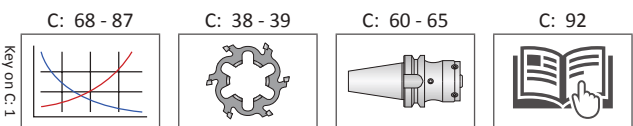


m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels


4505 Series | Long Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

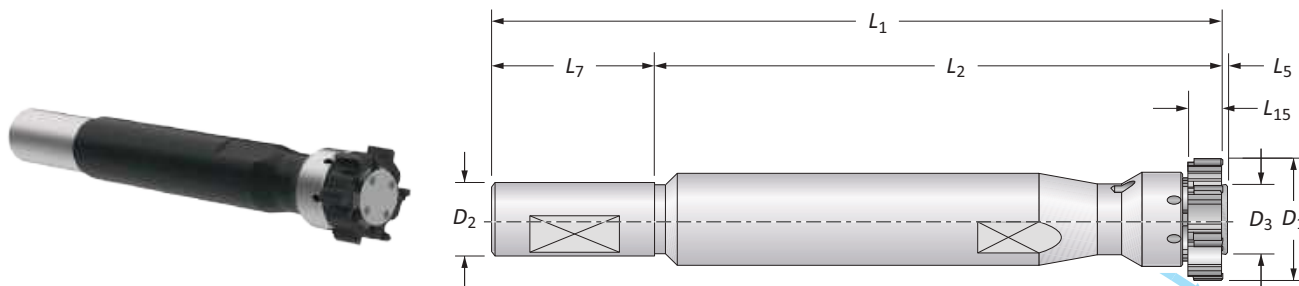

Series		4505		Shank Type		Cylindrical		Application		Blind Holes		Coolant		Radial	
D ₁ Range		Mandrel					Shank		Teeth	Part No. (Complete Mandrel^)					
		D ₃	L ₅	L ₁₅	L ₂	L ₁	L ₇	D ₂		With Flat	Without Flat				
m	17.600 - 21.599	11.2	1	11	121	172	50	20	6	4505-MC-010*	4505A-MC-010*				
	21.600 - 25.599	11.2	1	12	121	172	50	20	6	4505-MC-020*	4505A-MC-020*				
	25.600 - 29.599	15.1	1	14	153	204	50	20	6	4505-MC-030*	4505A-MC-030*				
	29.600 - 32.599	15.1	1	14	153	204	50	20	6	4505-MC-035*	4505A-MC-035*				
	32.600 - 36.599	20.3	1	16	179	236	56	25	6	4505-MC-040	4505A-MC-040				
	36.600 - 40.599	20.3	1	16	179	236	56	25	6	4505-MC-045	4505A-MC-045				
	40.600 - 45.599	24.1	1	16	201	258	56	25	6	4505-MC-050	4505A-MC-050				
	45.600 - 49.599	27.9	1.5	18.5	214	275.5	60	32	6	4505-MC-060	4505A-MC-060				
	49.600 - 55.599	27.9	1.5	18.5	214	275.5	60	32	6	4505-MC-070	4505A-MC-070				
	55.600 - 60.599	27.9	1.5	18.5	214	275.5	60	32	6	4505-MC-075	4505A-MC-075				
	60.600 - 65.599	37.1	1.5	18.5	237	298.5	60	32	6	4505-MC-080	4505A-MC-080				
	65.600 - 70.599	37.1	1.5	18.5	237	298.5	60	32	6	4505-MC-085	4505A-MC-085				
	70.600 - 79.599	37.1	1.5	18.5	237	298.5	60	32	6	4505-MC-090	4505A-MC-090				
79.600 - 90.599	53.1	1.5	18.5	245	316.5	70	40	8	4505-MC-100	4505A-MC-100					
90.600 - 100.599	53.1	1.5	18.5	245	316.5	70	40	8	4505-MC-110	4505A-MC-110					
i	0.6929 - 0.8504	0.441	0.039	0.433	4.764	6.772	1.969	0.750	6	94505-MC-010*	94505A-MC-010*				
	0.8505 - 1.0078	0.441	0.039	0.472	4.764	6.772	1.969	0.750	6	94505-MC-020*	94505A-MC-020*				
	1.0079 - 1.1653	0.594	0.039	0.551	6.024	8.031	1.969	0.750	6	94505-MC-030*	94505A-MC-030*				
	1.1654 - 1.2834	0.594	0.039	0.551	6.024	8.031	1.969	0.750	6	94505-MC-035*	94505A-MC-035*				
	1.2835 - 1.4409	0.799	0.039	0.630	7.047	9.291	2.205	1.000	6	94505-MC-040	94505A-MC-040				
	1.4410 - 1.5984	0.799	0.039	0.630	7.047	9.291	2.205	1.000	6	94505-MC-045	94505A-MC-045				
	1.5985 - 1.7952	0.949	0.039	0.630	7.913	10.157	2.205	1.000	6	94505-MC-050	94505A-MC-050				
	1.7953 - 1.9527	1.098	0.059	0.728	8.425	10.846	2.362	1.250	6	94505-MC-060	94505A-MC-060				
	1.9528 - 2.1889	1.098	0.059	0.728	8.425	10.846	2.362	1.250	6	94505-MC-070	94505A-MC-070				
	2.1890 - 2.3858	1.098	0.059	0.728	8.425	10.846	2.362	1.250	6	94505-MC-075	94505A-MC-075				
	2.3859 - 2.5826	1.461	0.059	0.728	9.331	11.752	2.362	1.250	6	94505-MC-080	94505A-MC-080				
	2.5827 - 2.7795	1.461	0.059	0.728	9.331	11.752	2.362	1.250	6	94505-MC-085	94505A-MC-085				
	2.7796 - 3.1338	1.461	0.059	0.728	9.331	11.752	2.362	1.250	6	94505-MC-090	94505A-MC-090				
3.1339 - 3.5669	2.091	0.059	0.728	9.646	12.461	2.756	1.500	8	94505-MC-100	94505A-MC-100					
3.5670 - 3.9606	2.091	0.059	0.728	9.646	12.461	2.756	1.500	8	94505-MC-110	94505A-MC-110					

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

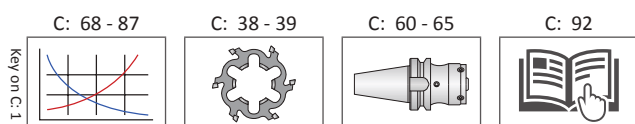

= Metric (mm)
 = Imperial (in)

Ring Style Mandrels

4505 Series | Long Length | Spare Parts



Part No. (Complete Mandrel^)			Spare Parts						
		1		2			3		Wrench Size (mm)
With Flat	Without Flat	Drive Pins	Number of Drive Pins	Conical Ring	Conical Ring (2nd Expansion)	Conical Ring (3rd Expansion)	Adjusting Key		
m	4505-MC-010	4505A-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	4505-MC-020	4505A-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	4505-MC-030	4505A-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4505-MC-035	4505A-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4505-MC-040	4505A-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4505-MC-045	4505A-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4505-MC-050	4505A-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
	4505-MC-060	4505A-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4505-MC-070	4505A-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4505-MC-075	4505A-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4505-MC-080	4505A-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4505-MC-085	4505A-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34	
4505-MC-090	4505A-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34	
4505-MC-100	4505A-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	
4505-MC-110	4505A-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	
i	94505-MC-010	94505A-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	94505-MC-020	94505A-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	94505-MC-030	94505A-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	94505-MC-035	94505A-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	94505-MC-040	94505A-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	94505-MC-045	94505A-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	94505-MC-050	94505A-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
	94505-MC-060	94505A-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	94505-MC-070	94505A-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	94505-MC-075	94505A-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	94505-MC-080	94505A-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
94505-MC-085	94505A-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34	
94505-MC-090	94505A-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34	
94505-MC-100	94505A-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	
94505-MC-110	94505A-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	



^Complete mandrel does not include cutting ring.

C: 68 - 87

C: 38 - 39

C: 60 - 65

C: 92




m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels


4330 Series | Short Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

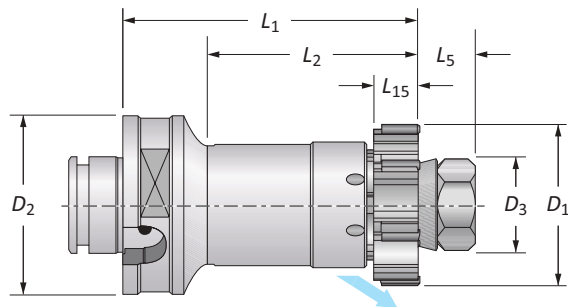

Series		4330	Shank Type		Modular		Application		Through Holes		Coolant		Radial	
D ₁ Range			Mandrel					Shank			Part No. (Complete Mandrel^)			
Metric (mm)		Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth					
m	17.600 - 21.599	0.6929 - 0.8504	12	11	11	55	75	50	6	4330-MC-010*				
	21.600 - 25.599	0.8505 - 1.0078	12	11	12	55	75	50	6	4330-MC-020*				
	25.600 - 32.599	1.0079 - 1.2834	15.6	11	14	60	80	50	6	4330-MC-030*				
	32.600 - 40.599	1.2835 - 1.5984	22	14	16	60	80	50	6	4330-MC-040				
	40.600 - 45.599	1.5985 - 1.7952	25.4	15	16	60	80	50	6	4330-MC-050				
	45.600 - 49.599	1.7953 - 1.9527	30	20.5	18.5	60	80	50	6	4330-MC-060				
	49.600 - 60.599	1.9528 - 2.3858	30	20.5	18.5	60	80	50	6	4330-MC-070				
	60.600 - 70.599	2.3859 - 2.7795	40	24.5	18.5	65	90	63	6	4330-MC-080				
	70.600 - 79.599	2.7796 - 3.1338	40	24.5	18.5	65	90	63	6	4330-MC-090				
	79.600 - 90.599	3.1339 - 3.5669	56	28.5	18.5	65	90	63	8	4330-MC-100				
90.600 - 100.599	3.5670 - 3.9606	56	28.5	18.5	65	90	63	8	4330-MC-110					

[^]Complete mandrel does not include cutting ring.


*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

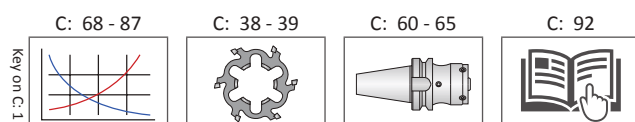

m = Metric (mm)
i = Imperial (in)

Ring Style Mandrels

4330 Series | Short Length | Spare Parts

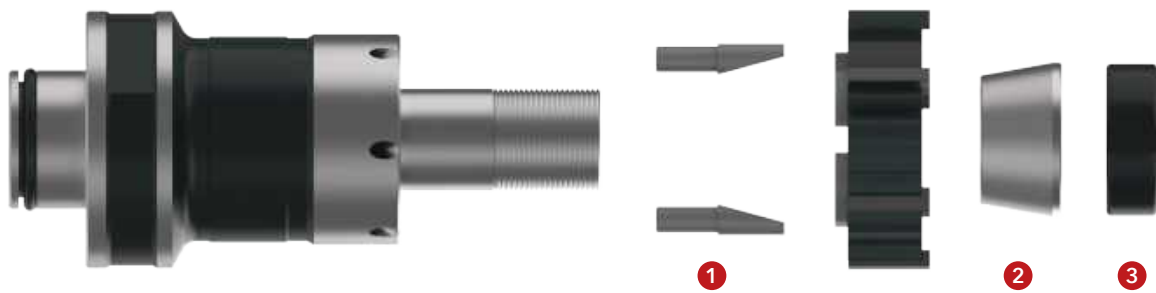

Part No. (Complete Mandrel^)	Spare Parts				
	1		2	3	
	Drive Pins	Number of Drive Pins	Conical Ring	Nut	Wrench Size (mm)
4330-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10
4330-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10
4330-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13
4330-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19
4330-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22
4330-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦
4330-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦
4330-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦
4330-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦
4330-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦
4330-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦

^Complete mandrel does not include cutting ring.


♦ Spanner wrench

C: 68 - 87


C: 38 - 39

C: 60 - 65

C: 92










m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels


4335 Series | Short Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

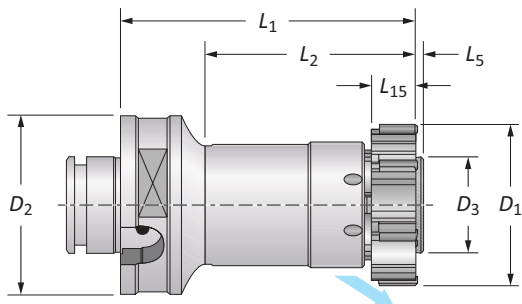

Series		4335	Shank Type		Modular		Application		Blind Holes		Coolant		Radial	
D ₁ Range			Mandrel					Shank						
Metric (mm)		Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth	Part No. (Complete Mandrel^)				
m	17.600 - 21.599	0.6929 - 0.8504	11.2	1	11	55	75	50	6	4335-MC-010*				
	21.600 - 25.599	0.8505 - 1.0078	11.2	1	12	55	75	50	6	4335-MC-020*				
	25.600 - 29.599	1.0079 - 1.1653	15.1	1	14	60	80	50	6	4335-MC-030*				
	29.600 - 32.599	1.1654 - 1.2834	15.1	1	14	60	80	50	6	4335-MC-035*				
	32.600 - 36.599	1.2835 - 1.4409	20.3	1	16	60	80	50	6	4335-MC-040				
	36.600 - 40.599	1.4410 - 1.5984	20.3	1	16	60	80	50	6	4335-MC-045				
	40.600 - 45.599	1.5985 - 1.7952	24.1	1	16	60	80	50	6	4335-MC-050				
	45.600 - 49.599	1.7953 - 1.9527	27.9	1.5	18.5	60	80	50	6	4335-MC-060				
	49.600 - 55.599	1.9528 - 2.1889	27.9	1.5	18.5	60	80	50	6	4335-MC-070				
	55.600 - 60.599	2.1890 - 2.3858	27.9	1.5	18.5	60	80	50	6	4335-MC-075				
	60.600 - 65.599	2.3859 - 2.5826	37.1	1.5	18.5	65	90	63	6	4335-MC-080				
	65.600 - 70.599	2.5827 - 2.7795	37.1	1.5	18.5	65	90	63	6	4335-MC-085				
	70.600 - 79.599	2.7796 - 3.1338	37.1	1.5	18.5	65	90	63	6	4335-MC-090				
79.600 - 90.599	3.1339 - 3.5669	53.1	1.5	18.5	65	90	63	8	4335-MC-100					
90.600 - 100.599	3.5670 - 3.9606	53.1	1.5	18.5	65	90	63	8	4335-MC-110					

[^]Complete mandrel does not include cutting ring.


*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.



m = Metric (mm)
i = Imperial (in)


Ring Style Mandrels

4335 Series | Short Length | Spare Parts

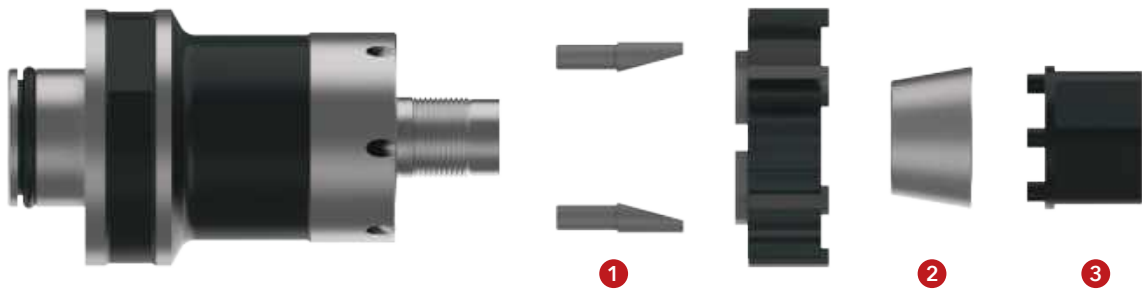

Part No. (Complete Mandrel^)		Spare Parts						
		1		2			3	
		Drive Pins	Number of Drive Pins	Conical Ring	Conical Ring (2nd Expansion)	Conical Ring (3rd Expansion)	Adjusting Key	Wrench Size (mm)
m	4335-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	4335-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	—	4001-CH-015	10
	4335-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4335-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4335-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4335-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4335-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
	4335-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4335-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4335-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4335-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4335-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4335-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4335-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
4335-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	


^Complete mandrel does not include cutting ring.



C: 68 - 87



C: 38 - 39



C: 60 - 65




C: 92

 = Metric (mm)
 = Imperial (in)



Ring Style Mandrels


4350 Series | Standard Length | Diameter Range: 17.600 mm - 200.600 mm (0.6929" - 7.8976")

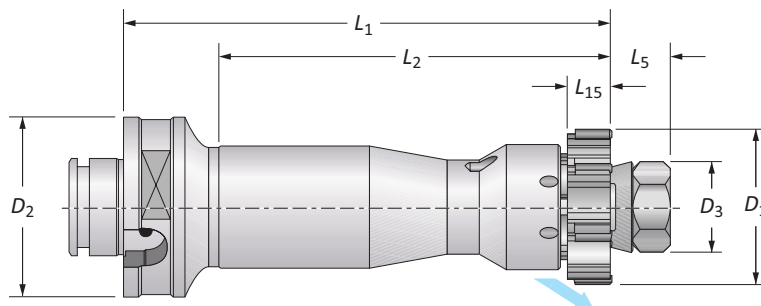


Series		4350	Shank Type	Modular	Application		Through Holes		Coolant	Radial
D ₁ Range			Mandrel					Shank		Part No.
Metric (mm)		Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth	(Complete Mandrel [^])
m	17.600 - 21.599	0.6929 - 0.8504	12	11	11	81	116	50	6	4350-MC-010*
	21.600 - 25.599	0.8505 - 1.0078	12	11	12	81	116	50	6	4350-MC-020*
	25.600 - 32.599	1.0079 - 1.2834	15.6	11	14	102	137	50	6	4350-MC-030*
	32.600 - 40.599	1.2835 - 1.5984	22	14	16	102	137	50	6	4350-MC-040
	40.600 - 45.599	1.5985 - 1.7952	25.4	15	16	102	137	50	6	4350-MC-050
	45.600 - 49.599	1.7953 - 1.9527	30	20.5	18.5	105	140	50	6	4350-MC-060
	49.600 - 60.599	1.9528 - 2.3858	30	20.5	18.5	105	140	50	6	4350-MC-070
	60.600 - 70.599	2.3859 - 2.7795	40	24.5	18.5	105	140	63	6	4350-MC-080
	70.600 - 79.599	2.7796 - 3.1338	40	24.5	18.5	105	140	63	6	4350-MC-090
	79.600 - 90.599	3.1339 - 3.5669	56	28.5	18.5	105	140	63	8	4350-MC-100
90.600 - 100.599	3.5670 - 3.9606	56	28.5	18.5	105	140	63	8	4350-MC-110	

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

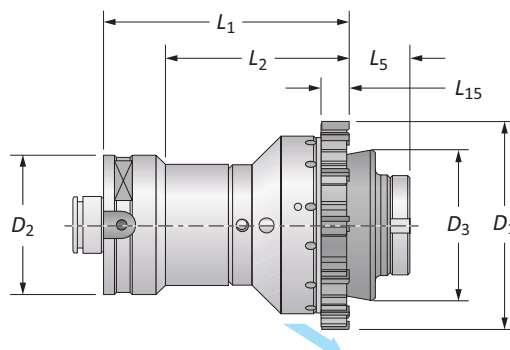

D ₁ Range		Mandrel					Shank	Teeth	Part No.
Metric (mm)	Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂		(Complete Mandrel [^])
100.600 - 110.599	3.9606 - 4.3543	73.8	35.5	18.5	—	140	80	10	4350-MC-120
110.600 - 115.599	4.3544 - 4.5511	80.8	35.5	18.5	—	140	80	12	4350-MC-130
115.600 - 120.599	4.5512 - 4.7480	86.8	35.5	18.5	—	140	80	12	4350-MC-140
120.600 - 125.599	4.7481 - 4.9448	86.8	35.5	18.5	—	140	80	12	4350-MC-150
125.600 - 132.599	4.9449 - 5.2204	90.8	35.5	18.5	—	140	80	12	4350-MC-160
132.600 - 139.599	5.2205 - 5.4960	90.8	35.5	18.5	—	140	80	12	4350-MC-170
m 139.600 - 145.599	5.4961 - 5.7322	102.8	35.5	18.5	—	140	80	12	4350-MC-180
145.600 - 155.599	5.7323 - 6.1259	107.8	35.5	18.5	—	140	80	12	4350-MC-190
155.600 - 165.599	6.1260 - 6.5196	107.8	48.5	18.5	—	140	80	12	4350-MC-200
165.600 - 175.599	6.5197 - 6.9133	117.8	48.5	18.5	—	140	80	12	4350-MC-210
175.600 - 185.599	6.9134 - 7.3070	127.8	48.5	18.5	—	140	80	12	4350-MC-220
185.600 - 195.599	7.3071 - 7.7007	137.8	48.5	18.5	—	140	80	12	4350-MC-230
195.600 - 200.600	7.7008 - 7.8976	145.8	48.5	18.5	—	140	80	12	4350-MC-240

[^]Complete mandrel does not include cutting ring.

m = Metric (mm)
i = Imperial (in)

Ring Style Mandrels


4350 Series | Standard Length | Spare Parts



Part No. (Complete Mandrel [^])	Spare Parts				
	1 Drive Pins	2 Number of Drive Pins	3 Conical Ring	4 Nut	5 Wrench Size (mm)
4350-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10
4350-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10
4350-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13
4350-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19
4350-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22
4350-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30 ♦
4350-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30 ♦
4350-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40 ♦
4350-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40 ♦
4350-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦
4350-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56 ♦

[^]Complete mandrel does not include cutting ring.


♦ Spanner wrench

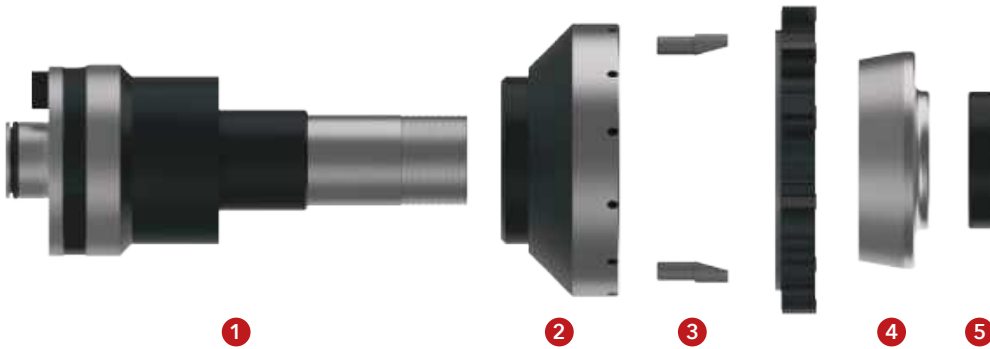

Part No. (Complete Mandrel [^])	Spare Parts						
	1 Mandrel	2 Flange	3 Drive Pins	4 Number of Drive Pins	5 Conical Ring	6 Nut	7 Wrench Size (mm)
4350-MC-120	4350-MA-120	4355-FL-035	2000-CO-090	2	2060-BU-010	2000-GH-095	58 ♦
4350-MC-130	4350-MA-120	4355-FL-045	2000-CO-090	2	2060-BU-020	2000-GH-095	58 ♦
4350-MC-140	4350-MA-120	4355-FL-055	2000-CO-090	2	2060-BU-030	2000-GH-095	58 ♦
4350-MC-150	4350-MA-120	4355-FL-065	2000-CO-090	2	2060-BU-030	2000-GH-095	58 ♦
4350-MC-160	4350-MA-120	4355-FL-075	2000-CO-100	2	2060-BU-040	2000-GH-095	58 ♦
4350-MC-170	4350-MA-120	4355-FL-085	2000-CO-100	2	2060-BU-040	2000-GH-095	58 ♦
4350-MC-180	4350-MA-120	4355-FL-095	2000-CO-100	2	2060-BU-050	2000-GH-095	58 ♦
4350-MC-190	4350-MA-120	4355-FL-105	2000-CO-110	2	2060-BU-060	2000-GH-095	58 ♦
4350-MC-200	4350-MA-200	4355-FL-115	2000-CO-110	2	2060-BU-070	2000-GH-120	90 ♦
4350-MC-210	4350-MA-200	4355-FL-125	2000-CO-110	2	2060-BU-080	2000-GH-120	90 ♦
4350-MC-220	4350-MA-200	4355-FL-135	2000-CO-120	2	2060-BU-090	2000-GH-120	90 ♦
4350-MC-230	4350-MA-200	4355-FL-145	2000-CO-120	2	2060-BU-100	2000-GH-120	90 ♦
4350-MC-240	4350-MA-200	4355-FL-155	2000-CO-120	2	2060-BU-110	2000-GH-120	90 ♦

[^]Complete mandrel does not include cutting ring.

♦ Spanner wrench

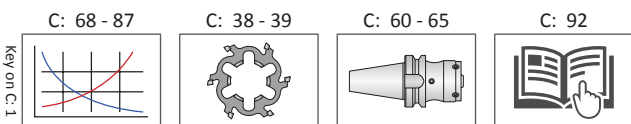


m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels


4355 Series | Standard Length | Diameter Range: 17.600 mm - 200.600 mm (0.6929" - 7.8976")

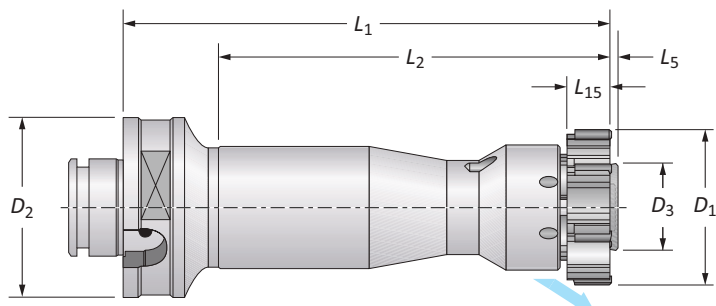


Series		4355	Shank Type		Modular		Application		Blind Holes		Coolant		Radial	
D ₁ Range			Mandrel					Shank				Part No.		
Metric (mm)		Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth	(Complete Mandrel [^])				
m	17.600 - 21.599		0.6929 - 0.8504	11.2	1	11	81	116	50	6	4355-MC-010*			
	21.600 - 25.599		0.8505 - 1.0078	11.2	1	12	81	116	50	6	4355-MC-020*			
	25.600 - 29.599		1.0079 - 1.1653	15.1	1	14	102	137	50	6	4355-MC-030*			
	29.600 - 32.599		1.1654 - 1.2834	15.1	1	14	102	137	50	6	4355-MC-035*			
	32.600 - 36.599		1.2835 - 1.4409	20.3	1	16	102	137	50	6	4355-MC-040			
	36.600 - 40.599		1.4410 - 1.5984	20.3	1	16	102	137	50	6	4355-MC-045			
	40.600 - 45.599		1.5985 - 1.7952	24.1	1	16	102	137	50	6	4355-MC-050			
	45.600 - 49.599		1.7953 - 1.9527	27.9	1.5	18.5	105	140	50	6	4355-MC-060			
	49.600 - 55.599		1.9528 - 2.1889	27.9	1.5	18.5	105	140	50	6	4355-MC-070			
	55.600 - 60.599		2.1890 - 2.3858	27.9	1.5	18.5	105	140	50	6	4355-MC-075			
	60.600 - 65.599		2.3859 - 2.5826	37.1	1.5	18.5	105	140	63	6	4355-MC-080			
	65.600 - 70.599		2.5827 - 2.7795	37.1	1.5	18.5	105	140	63	6	4355-MC-085			
	70.600 - 79.599		2.7796 - 3.1338	37.1	1.5	18.5	105	140	63	6	4355-MC-090			
	79.600 - 90.599		3.1339 - 3.5669	53.1	1.5	18.5	105	140	63	8	4355-MC-100			
	90.600 - 100.599		3.5670 - 3.9606	53.1	1.5	18.5	105	140	63	8	4355-MC-110			

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

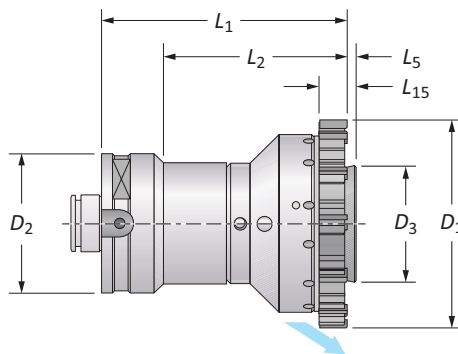

D ₁ Range		Mandrel					Shank	Teeth	Part No.
Metric (mm)	Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂		(Complete Mandrel [^])
100.600 - 110.599	3.9606 - 4.3543	70.3	1.5	18.5	—	140	80	10	4355-MC-120
110.600 - 115.599	4.3544 - 4.5511	76.3	1.5	18.5	—	140	80	12	4355-MC-130
115.600 - 120.599	4.5512 - 4.7480	83.3	1.5	18.5	—	140	80	12	4355-MC-140
120.600 - 125.599	4.7481 - 4.9448	87.3	1.5	18.5	—	140	80	12	4355-MC-150
125.600 - 132.599	4.9449 - 5.2204	87.3	1.5	18.5	—	140	80	12	4355-MC-160
132.600 - 139.599	5.2205 - 5.4960	87.3	1.5	18.5	—	140	80	12	4355-MC-170
139.600 - 145.599	5.4961 - 5.7322	99.3	1.5	18.5	—	140	80	12	4355-MC-180
145.600 - 155.599	5.7323 - 6.1259	104.3	1.5	18.5	—	140	80	12	4355-MC-190
155.600 - 165.599	6.1260 - 6.5196	104.3	1.5	18.5	—	140	80	12	4355-MC-200
165.600 - 175.599	6.5197 - 6.9133	114.3	1.5	18.5	—	140	80	12	4355-MC-210
175.600 - 185.599	6.9134 - 7.3070	124.3	1.5	18.5	—	140	80	12	4355-MC-220
185.600 - 195.599	7.3071 - 7.7007	134.3	1.5	18.5	—	140	80	12	4355-MC-230
195.600 - 200.600	7.7008 - 7.8976	142.3	1.5	18.5	—	140	80	12	4355-MC-240

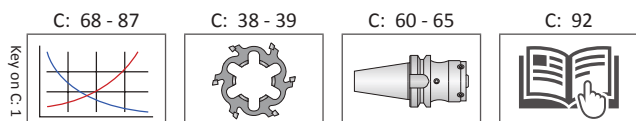[^]Complete mandrel does not include cutting ring.

= Metric (mm)
 = Imperial (in)


Ring Style Mandrels

4355 Series | Standard Length | Spare Parts




Part No. (Complete Mandrel^)		Spare Parts						
		1		2			3	
		Drive Pins	Number of Drive Pins	Conical Ring	Conical Ring (2nd Expansion)	Conical Ring (3rd Expansion)	Adjusting Key	Wrench Size (mm)
m	4355-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
	4355-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
	4355-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4355-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
	4355-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4355-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
	4355-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
	4355-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4355-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4355-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
	4355-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4355-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4355-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
	4355-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
4355-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46	

[^]Complete mandrel does not include cutting ring.

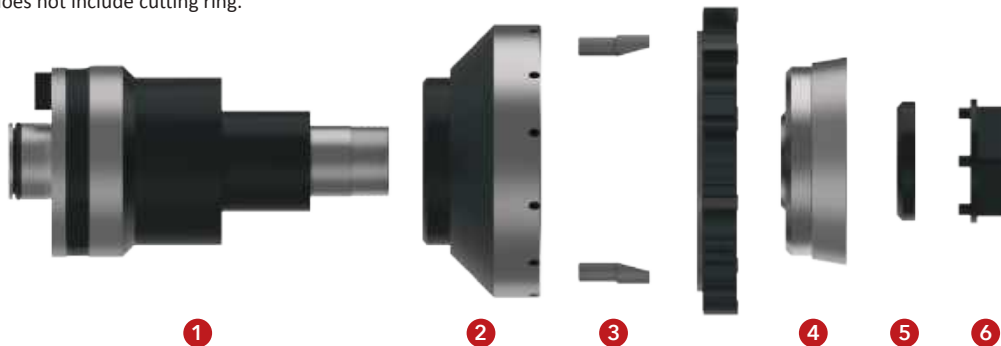

Part No. (Complete Mandrel [^])	Spare Parts							Wrench Size (mm)
	1 Mandrel	2 Flange	3 Drive Pins	Number of Drive Pins	4 Conical Ring	5 Nut	6 Adjusting Key	
4355-MC-120	4355-MA-120	4355-FL-035	2000-CO-090	2	4001-AC-116	4001-GH-035	4001-CH-135	46
4355-MC-130	4355-MA-120	4355-FL-045	2000-CO-090	2	4001-AC-126	4001-GH-035	4001-CH-135	46
4355-MC-140	4355-MA-120	4355-FL-055	2000-CO-090	2	4001-AC-136	4001-GH-035	4001-CH-135	46
4355-MC-150	4355-MA-120	4355-FL-065	2000-CO-090	2	4001-AC-136	4001-GH-035	4001-CH-135	46
4355-MC-160	4355-MA-120	4355-FL-075	2000-CO-100	2	4001-AC-146	4001-GH-035	4001-CH-135	46
4355-MC-170	4355-MA-120	4355-FL-085	2000-CO-100	2	4001-AC-146	4001-GH-035	4001-CH-135	46
4355-MC-180	4355-MA-120	4355-FL-095	2000-CO-100	2	4001-AC-156	4001-GH-035	4001-CH-135	46
4355-MC-190	4355-MA-120	4355-FL-105	2000-CO-110	2	4001-AC-166	4001-GH-035	4001-CH-135	46
4355-MC-200	4355-MA-200	4355-FL-115	2000-CO-110	2	4001-AC-176	4001-GH-115	4001-CH-115	46
4355-MC-210	4355-MA-200	4355-FL-125	2000-CO-110	2	4001-AC-186	4001-GH-115	4001-CH-115	46
4355-MC-220	4355-MA-200	4355-FL-135	2000-CO-120	2	4001-AC-196	4001-GH-115	4001-CH-115	46
4355-MC-230	4355-MA-200	4355-FL-145	2000-CO-120	2	4001-AC-117	4001-GH-115	4001-CH-115	46
4355-MC-240	4355-MA-200	4355-FL-155	2000-CO-120	2	4001-AC-127	4001-GH-115	4001-CH-115	46

[^]Complete mandrel does not include cutting ring.




m = Metric (mm)
i = Imperial (in)



Ring Style Mandrels

4300 Series | Long Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

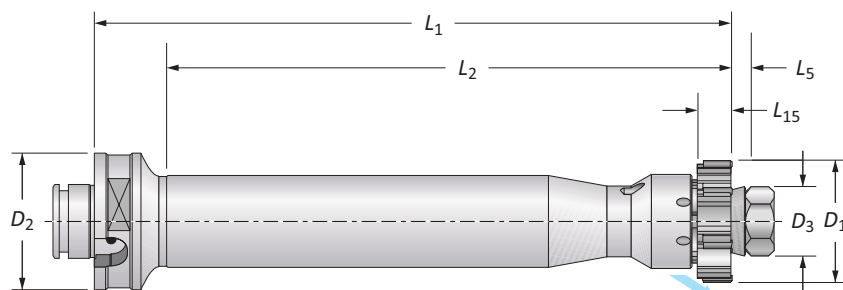

Series		4300	Shank Type		Modular	Application		Through Holes	Coolant		Radial
D ₁ Range			Mandrel								
Metric (mm)		Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth	Part No. (Complete Mandrel [^])	
m	17.600 - 21.599	0.6929 - 0.8504	12	11	11	121	156	50	6	4300-MC-010*	
	21.600 - 25.599	0.8505 - 1.0078	12	11	12	121	156	50	6	4300-MC-020*	
	25.600 - 32.599	1.0079 - 1.2834	15.6	11	14	153	188	50	6	4300-MC-030*	
	32.600 - 40.599	1.2835 - 1.5984	22	14	16	179	214	50	6	4300-MC-040	
	40.600 - 45.599	1.5985 - 1.7952	25.4	15	16	201	236	50	6	4300-MC-050	
	45.600 - 49.599	1.7953 - 1.9527	30	20.5	18.5	214	249	50	6	4300-MC-060	
	49.600 - 60.599	1.9528 - 2.3858	30	20.5	18.5	214	249	50	6	4300-MC-070	
	60.600 - 70.599	2.3859 - 2.7795	40	24.5	18.5	237	272	63	6	4300-MC-080	
	70.600 - 79.599	2.7796 - 3.1338	40	24.5	18.5	237	272	63	6	4300-MC-090	
	79.600 - 90.599	3.1339 - 3.5669	56	28.5	18.5	245	280	63	8	4300-MC-100	
90.600 - 100.599	3.5670 - 3.9606	56	28.5	18.5	245	280	63	8	4300-MC-110		

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.

C: 68 - 87

C: 38 - 39

C: 60 - 65

C: 92

m = Metric (mm)
i = Imperial (in)


Ring Style Mandrels

4300 Series | Long Length | Spare Parts



Part No. (Complete Mandrel^)	Spare Parts				
	1 Drive Pins	Number of Drive Pins	2 Conical Ring	3 Nut	Wrench Size (mm)
4300-MC-010	2000-CO-010	3	2010-AC-010	2000-DA-010	10
4300-MC-020	2000-CO-020	3	2010-AC-010	2000-DA-010	10
4300-MC-030	2000-CO-030	3	2010-AC-020	2000-DA-020	13
4300-MC-040	2000-CO-040	2	2010-AC-030	2000-DA-060	19
4300-MC-050	2000-CO-060	2	2010-AC-040	2000-DA-090	22
4300-MC-060	2000-CO-060	2	2010-AC-050	2000-GH-880	30
4300-MC-070	2000-CO-070	2	2010-AC-050	2000-GH-880	30
4300-MC-080	2000-CO-080	2	2010-AC-060	2000-GH-900	40
4300-MC-090	2000-CO-090	2	2010-AC-060	2000-GH-900	40
4300-MC-100	2000-CO-090	2	2010-AC-070	2000-GH-920	56
4300-MC-110	2000-CO-090	2	2010-AC-070	2000-GH-920	56


^Complete mandrel does not include cutting ring.



C: 68 - 87



C: 38 - 39



C: 60 - 65




C: 92

 = Metric (mm)
 = Imperial (in)



Ring Style Mandrels

4305 Series | Long Length | Diameter Range: 17.600 mm - 100.599 mm (0.6929" - 3.9606")

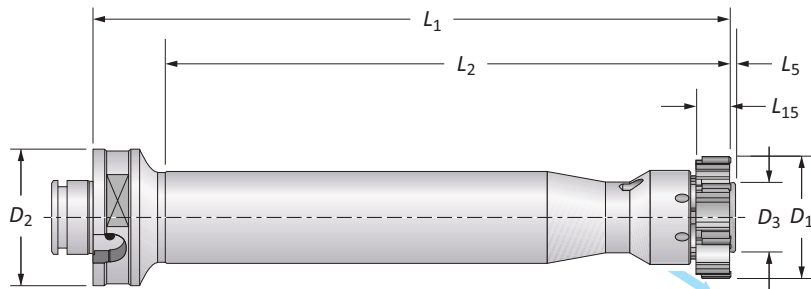


Series		4305	Shank Type	Modular	Application	Blind Holes		Coolant	Radial	
D ₁ Range			Mandrel							
	Metric (mm)	Imperial (inch)	D ₃	L ₅	L ₁₅	L ₂	L ₁	D ₂	Teeth	Part No. (Complete Mandrel [^])
m	17.600 - 21.599	0.6929 - 0.8504	11.2	1	11	121	156	50	6	4305-MC-010*
	21.600 - 25.599	0.8505 - 1.0078	11.2	1	12	121	156	50	6	4305-MC-020*
	25.600 - 29.599	1.0079 - 1.1653	15.1	1	14	153	188	50	6	4305-MC-030*
	29.600 - 32.599	1.1654 - 1.2834	15.1	1	14	153	188	50	6	4305-MC-035*
	32.600 - 36.599	1.2835 - 1.4409	20.3	1	16	179	214	50	6	4305-MC-040
	36.600 - 40.599	1.4410 - 1.5984	20.3	1	16	179	214	50	6	4305-MC-045
	40.600 - 45.599	1.5985 - 1.7952	24.1	1	16	201	236	50	6	4305-MC-050
	45.600 - 49.599	1.7953 - 1.9527	27.9	1.5	18.5	214	249	50	6	4305-MC-060
	49.600 - 55.599	1.9528 - 2.1889	27.9	1.5	18.5	214	249	50	6	4305-MC-070
	55.600 - 60.599	2.1890 - 2.3858	27.9	1.5	18.5	214	249	50	6	4305-MC-075
	60.600 - 65.599	2.3859 - 2.5826	37.1	1	18.5	237	272	63	6	4305-MC-080
	65.600 - 70.599	2.5827 - 2.7795	37.1	1	18.5	237	272	63	6	4305-MC-085
	70.600 - 79.599	2.7796 - 3.1338	37.1	1	18.5	237	272	63	6	4305-MC-090
79.600 - 90.599	3.1339 - 3.5669	53.1	1.5	18.5	245	280	63	8	4305-MC-100	
	90.600 - 100.599	3.5670 - 3.9606	53.1	1.5	18.5	245	280	63	8	4305-MC-110

[^]Complete mandrel does not include cutting ring.

*17.600 mm - 32.599 mm (0.6929" - 1.2834") diameter cutting rings are available as specials by contacting Application Engineering.


C: 68 - 87



C: 38 - 39



C: 60 - 65



C: 92



= Metric (mm)
 = Imperial (in)

Ring Style Mandrels

4305 Series | Long Length | Spare Parts



Part No. (Complete Mandrel^)	Spare Parts						
	1	Number of Drive Pins	2			3	Wrench Size (mm)
	Drive Pins		Conical Ring	Conical Ring (2nd Expansion)	Conical Ring (3rd Expansion)	Adjusting Key	
4305-MC-010	2000-CO-010	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
4305-MC-020	2000-CO-020	3	4001-AC-115	4001-AC-215	–	4001-CH-015	10
4305-MC-030	2000-CO-030	3	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
4305-MC-035	2000-CO-040	2	4001-AC-125	4001-AC-225	4001-AC-325	4001-CH-025	13
4305-MC-040	2000-CO-040	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
4305-MC-045	2000-CO-050	2	4001-AC-135	4001-AC-235	4001-AC-335	4001-CH-035	18
4305-MC-050	2000-CO-060	2	4001-AC-145	4001-AC-245	4001-AC-345	4001-CH-045	22
4305-MC-060	2000-CO-060	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4305-MC-070	2000-CO-070	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4305-MC-075	2000-CO-080	2	4001-AC-155	4001-AC-255	4001-AC-355	4001-CH-055	26
4305-MC-080	2000-CO-080	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4305-MC-085	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4305-MC-090	2000-CO-090	2	4001-AC-165	4001-AC-265	4001-AC-365	4001-CH-065	34
4305-MC-100	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46
4305-MC-110	2000-CO-090	2	4001-AC-185	4001-AC-285	4001-AC-385	4001-CH-085	46



^Complete mandrel does not include cutting ring.

C: 68 - 87

C: 38 - 39

C: 60 - 65

C: 92



 = Metric (mm)
 = Imperial (in)

Radial Adjusting Shanks



Large range of shanks for different machine types




Highly adjustable for improved concentricity



All shanks are available with through coolant

All the Pieces You Need

Modular System courtesy of

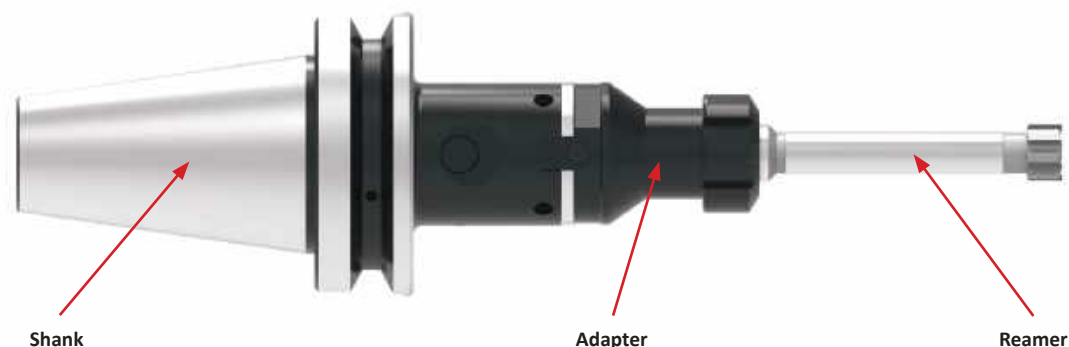

DIN 69871/1 B and A



HSK-A DIN 69893/1



JMTBA MAS-403
BT B and BT



Straight



Collet Chuck Adapter



Cylindrical Shank
Adapter

Radial Adjusting Shanks

Setup Information

Radial Adjusting Shanks and Ring Style Arbors

The following is a quick guide for setting up a radial adjusting shank and a ring style reamer. The ring reamer arbor does not contain the tang needed to connect to the shank. The tang must first be removed from the shank and then installed into the reamer arbor (demonstrated below).




Step 1:

The tang comes installed with the shank. Loosen the clamping screw on each side and remove the tang from the shank.



Step 2:

Thread the tang into the back end of the ring arbor. Use a bench vise and wrench to tighten.

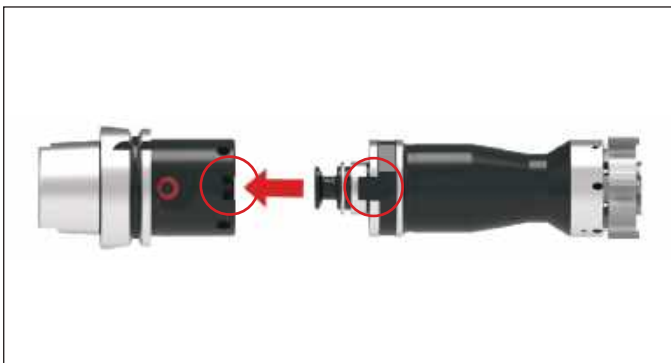

Step 3:

Assemble the ring arbor to the shank. With the clamping screws still loosened, align the key on the arbor to the keyway on the shank.



Step 4:

Once the ring arbor is connected with the shank, tighten the clamping screws to secure the tang back into place.

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING



X

SPECIALS



Radial Adjusting Shanks

DIN 69871/1 B and A

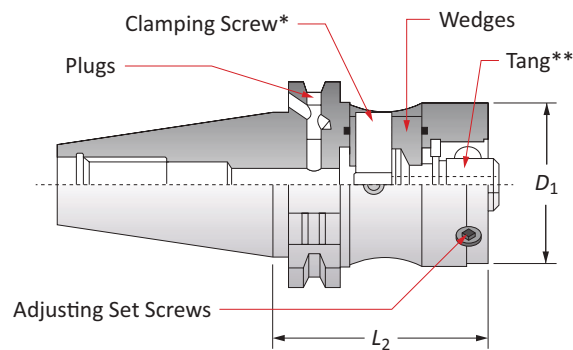Maximum radial adjustment is 0.20 mm (± 0.008 ") on diameter.

Shank				Part No.	Spare Parts					
ISO Taper	D ₁	L ₂	Retention Knob Thread Size		Wedges + O-Ring	Clamping Screw*	Adjusting Set Screws	Plugs	Replacement Tang**	Clamping Screw Key
40	50	65	M16 x 2	02B.40.50L.65	ATR14102.2.3	ATR14102.1	M8x1x10G	M5x5TG	ATT14103	6 mm
40	63	85	M16 x 2	02B.40.63L.85	ATR14108.2.3	ATR14108.1	M8x1x14G	M5x5TG	ATT14104	6 mm
45	50	70	M20 x 2.5	02B.45.50L.70	ATR14102.2.3	ATR14102.1	M8x1x10G	M5x5TG	ATT14103	6 mm
45	63	70	M20 x 2.5	02B.45.63L.70	ATR14108.2.3	ATR14108.1	M8x1x14G	M5x5TG	ATT14104	6 mm
50	50	70	M24 x 3	02B.50.50L.70	ATR14102.2.3	ATR14102.1	M8x1x10G	M5x5TG	ATT14103	6 mm
50	63	70	M24 x 3	02B.50.63L.70	ATR14108.2.3	ATR14108.1	M8x1x14G	M5x5TG	ATT14104	6 mm
50	80	70	M24 x 3	❖ 02B.50.80L.70	ATR18775.2.3	ATR18775.1	M8x1x20G	M5x5TG	ATT14104	6 mm

* Light torque exerted on the clamping screw transmits high axial forces, which provide stiffness and extreme accuracy to the assembly.

** Tang must be fitted to all reamer arbors and adapters prior to assembly.

❖ Could cause interference with tool changer mechanism.

NOTE: Shanks can be converted into DIN 69871/1A coolant by screwing the two plugs clockwise to the end of their stroke.

C: 60



Modular System courtesy of




Reference Key

Symbol	Attribute
D ₁	Modular shank size
L ₂	Gage length

Radial Adjusting Shanks

JMTBA MAS-403 BT B and BT

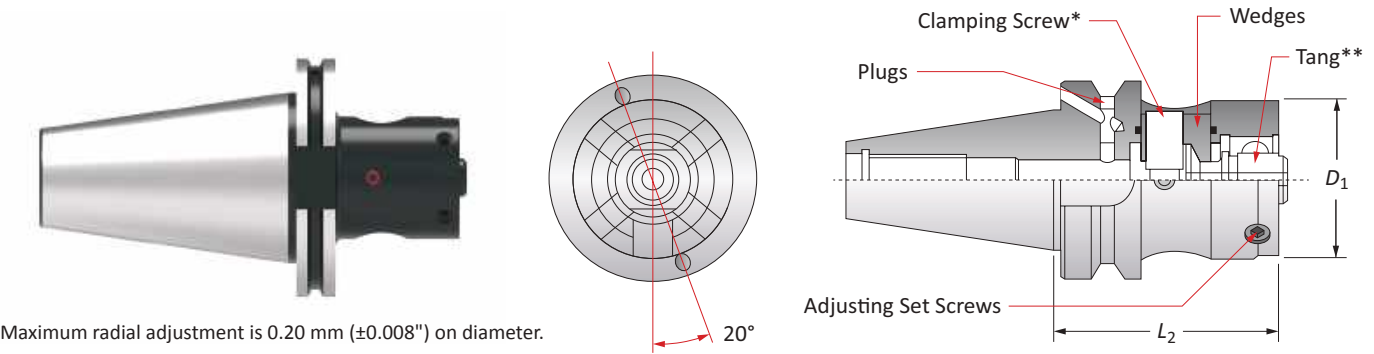


Shank				Spare Parts						
BT Taper	D ₁	L ₂	Retention Knob Thread Size	Part No.	Wedges + O-ring	Clamping Screw*	Adjusting Set Screws	Plugs	Replacement Tang**	Clamping Screw Key
40	50	70	M16 x 2	BTB.40.50L.70	ATR14102.2.3	ATR14102.1	M8x1x10G	M5x5TG	ATT14103	6 mm
40	63	80	M16 x 2	BTB.40.63L.80	ATR14108.2.3	ATR14108.1	M8x1x14G	M5x5TG	ATT14104	6 mm
50	50	90	M24 x 3	BTB.50.50L.90	ATR14102.2.3	ATR14102.1	M8x1x10G	M5x5TG	ATT14103	6 mm
50	63	90	M24 x 3	BTB.50.63L.90	ATR14108.2.3	ATR14108.1	M8x1x14G	M5x5TG	ATT14104	6 mm
50	80	90	M24 x 3	BTB.50.80L.90	ATR18775.2.3	ATR18775.1	M8x1x20G	M5x5TG	ATT14104	6 mm

* Light torque exerted on the clamping screw transmits high axial forces, which provide stiffness and extreme accuracy to the assembly.

** Tang must be fitted to all ring arbors and adapters prior to assembly.

NOTE: Shanks can be converted into MAS-403 BT coolant by screwing the two plugs clockwise to the end of their stroke.





Modular System courtesy of 

Reference Key	
Symbol	Attribute
D ₁	Modular shank size
L ₂	Gage length



Radial Adjusting Shanks

HSK-A DIN 69893/1

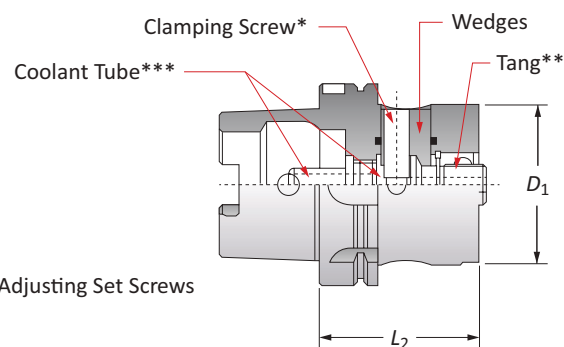

Shank			Spare Parts							
HSK	D_1	L_2	Part No.	Wedges + O-Ring	Clamping Screw*	Adjusting Set Screws	Replacement Tang**	Clamping Screw Key	Coolant Tube Key	Coolant Tube***
63	50	70	HSKA.63.50L.70	ATR14102.2.3	ATR14102.1	M8x1x10G	ATT14103	6 mm	ATR23856	ATT23728
63	63	75	HSKA.63.63L.75	ATR.41613.4	ATR14108.1	M8x1x14G	ATT14104	6 mm	ATR23856	ATT23728
100	50	80	HSKA.100.50L.80	ATR14102.2.3	ATR14102.1	M8x1x10G	ATT14103	6 mm	ATR23856	ATT23656
100	63	80	HSKA.100.63L.80	ATR14108.2.3	ATR14108.1	M8x1x14G	ATT14104	6 mm	ATR23856	ATT23656
100	80	80	HSKA.100.80L.80	ATR18775.2.3	ATR18775.1	M8x1x20G	ATT14104	6 mm	ATR23856	ATT23656

* Light torque exerted on the clamping screw transmits high axial forces, which provide stiffness and extreme accuracy to the assembly.

** Tang must be fitted to all ring arbors and adapters prior to assembly.

*** Coolant tube sold separately.

C: 60



Modular System courtesy of




Reference Key

Symbol	Attribute
D_1	Modular shank size
L_2	Gage length


Radial Adjusting Shanks

Straight

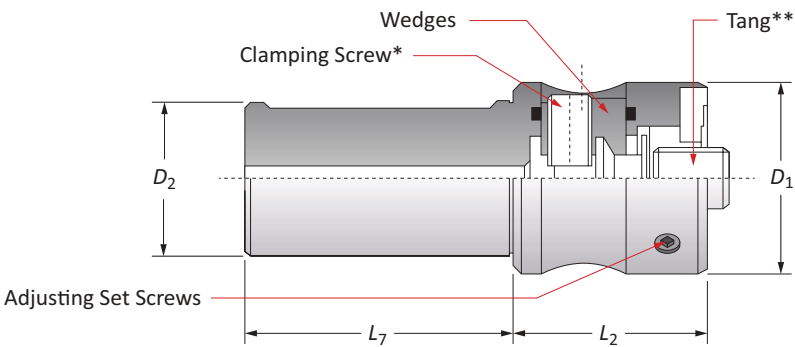

Shank				Part No.	Spare Parts				
D_1	D_2	L_2	L_7		Wedges + O-Ring	Clamping Screw*	Adjusting Set Screws	Replacement Tang**	Clamping Screw Key
50	25	50	70	CIL.25.50.50	ATR14102.2.3	ATR14102.1	M8x1x10G	ATT14103	6 mm
50	32	50	70	CIL.32.50.50	ATR14102.2.3	ATR14102.1	M8x1x10G	ATT14103	6 mm
50	40	50	70	CIL.40.50.50	ATR14102.2.3	ATR14102.1	M8x1x10G	ATT14103	6 mm

* Light torque exerted on the clamping screw transmits high axial forces, which provide stiffness and extreme accuracy to the assembly.
** Tang must be fitted to all ring arbors and adapters prior to assembly.




Modular System courtesy of 

Reference Key	
Symbol	Attribute
D_1	Modular shank size
D_2	Shank diameter
L_2	Gage length
L_7	Shank length



Radial Adjusting Adapters

Collet Chuck Adapters

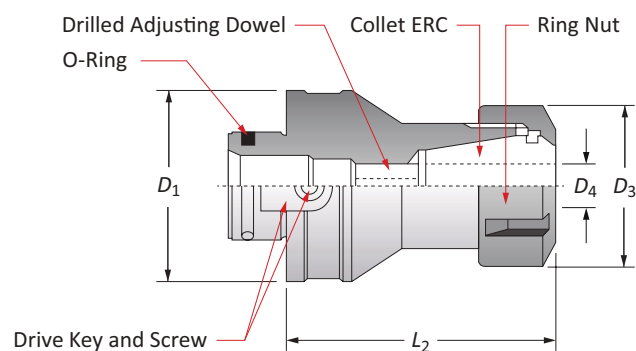

Collet Sleeve Size*	Adapter				Part No.	Spare Parts						
	D_1	D_3	D_4	L_2		Clamping Screw	Ring Nut	Adjusting Dowel	Drive Key	Ring Nut Wrench	Adjusting Dowel Key	
ERC25	50	42	0.5 - 16 mm	70	30.50R.25.70	M4x8V	G25S	M12x16GF	TAB3924	CH25S	6 mm	
ERC32	50	50	1 - 20 mm	70	30.50R.32.70	M4x8V	G32S	M16x15x18GF	TAB3924	CH32S	8 mm	
ERC32	63	50	1 - 20 mm	90	30.63R.32.90	M6x12V	G32S	M12x16GF	TAB3923.1	CH32S	6 mm	
ERC40	63	63	2 - 30 mm	90	30.63R.40.90	M6x12V	G40S	M20x2x20GF	TAB3923.1	CH40S	10 mm	
ERC32	80	50	1 - 20 mm	90	30.80R.32.90	M6x16V	G32S	M12x16GF	TAB3923.2	CH32S	6 mm	
ERC40	80	63	2 - 30 mm	90	30.80R.40.90	M6x16V	G40S	M20x2x20GF	TAB3923.2	CH40S	10 mm	

*Collet sleeve not included

Reference Key

Symbol	Attribute
D_1	Modular shank size
D_3	Body diameter
D_4	Shank diameter
L_2	Gage length

C: 60




Modular System courtesy of



Radial Adjusting Adapters

Cylindrical Shank Adapters

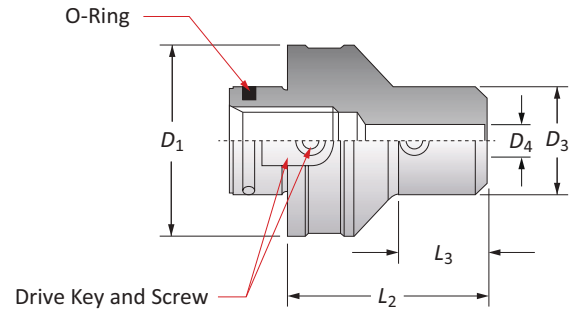

Adapter					Part No.	Spare Parts			
D_1	D_4	D_3	L_2	L_3		Drive Key	Screw	Set Screw	Set Screw Key
50	6	25	50	22.5	35.50R.06.50	TAB3924	M4x8V	M6x8G	3 mm
50	8	28	50	24.5	35.50R.08.50	TAB3924	M4x8V	M8x8G	4 mm
50	10	35	50	26.5	35.50R.10.50	TAB3924	M4x8V	M10x10G	5 mm
50	12	42	60	38.5	35.50R.12.60	TAB3924	M4x8V	M12x12G	6 mm
50	14	44	60	42	35.50R.14.60	TAB3924	M4x8V	M12x12G	6 mm
50	16	48	60	40	35.50R.16.60	TAB3924	M4x8V	M14x14G	6 mm
50	18	50	60	—	35.50R.18.60	TAB3924	M4x8V	M14x14G	6 mm
50	20	52	60	41	35.50R.20.60	TAB3924	M4x8V	M16x2x14G	8 mm
63	8	28	60	28	35.63R.08.60	TAB3923.1	M6x12V	M8x8G	4 mm
63	10	35	70	40	35.63R.10.70	TAB3923.1	M6x12V	M10x10G	5 mm
63	12	42	70	42	35.63R.12.70	TAB3923.1	M6x12V	M12x12G	6 mm
63	14	44	60	32	35.63R.14.60	TAB3923.1	M6x12V	M12x12G	6 mm
63	16	48	70	44	35.63R.16.70	TAB3923.1	M6x12V	M14x14G	6 mm
63	18	50	70	40	35.63R.18.70	TAB3923.1	M6x12V	M14x14G	6 mm
63	20	52	70	45	35.63R.20.70	TAB3923.1	M6x12V	M16x2x14G	8 mm
50	25	65	80	61	40.50R.25.80	TAB3924	M4x8V	M18x2x18G	8 mm
50	32	72	80	65	40.50R.32.80	TAB3924	M4x8V	M20x2x18G	10 mm
63	25	65	80	58	40.63R.25.80	TAB3923.1	M6x12V	M18x2x18G	8 mm
63	32	72	80	—	40.63R.32.80	TAB3923.1	M6x12V	M20x2x18G	10 mm
80	25	65	80	50.5	40.80R.25.80	TAB3923.2	M6x12V	M18x2x18G	8 mm
80	32	72	80	54	40.80R.32.80	TAB3923.2	M6x12V	M20x2x18G	10 mm

C: 60



Modular System courtesy of



Reference Key

Symbol	Attribute
D_1	Modular shank size
D_3	Body diameter
D_4	Shank diameter
L_2	Gage length
L_3	Reference length



Recommended Cutting Data | Metric (mm)

Replaceable Head Style | 7000 Series

ISO	Material	Hardness (BHN)	Speed (m/min)			Recommended Feed (mm/rev) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	11.80 mm - 21.60 mm		21.61 mm - 39.60 mm		39.61 mm - 80.60 mm	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 250	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 275	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 325	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180 - 375	4 - 8	40 - 50	60 - 120	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	4 - 8	40 - 50	60 - 120	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	Structural Steel A36, A285, A516	125 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 350	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		200 - 250	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	4 - 10	30 - 50	—	0.20 - 0.40	—	0.30 - 0.50	—	0.40 - 0.60	—
	Titanium Alloy	140 - 310	4 - 15	30 - 50	—	0.20 - 0.40	—	0.30 - 0.50	—	0.40 - 0.60	—
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	20 - 40	120 - 200	—	0.20 - 0.60	0.50 - 1.00	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
	Spheroidal Cast Iron (Pearlitic)	> 200	15 - 30	120 - 200	—	0.20 - 0.60	0.50 - 1.00	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
	Spheroidal Cast Iron (Ferritic)	260 - 320	10 - 15	—	90 - 140	0.20 - 0.60	0.50 - 0.60	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
N	Copper and Alloys Brass	< 500	60 - 200	100 - 200	—	0.20 - 0.40	—	0.30 - 0.60	—	0.40 - 0.80	—
	Bronze	< 180	20 - 40	80 - 160	100 - 300	0.30 - 0.60	0.40 - 1.00	0.30 - 0.60	0.50 - 1.20	0.30 - 0.60	0.60 - 1.50
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	20 - 100	—	—	0.30 - 0.60	—	0.40 - 1.00	—	0.40 - 1.00	—

Formulas

1. $RPM = m/min \cdot 3.82 \cdot DIA$ where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of reamer (mm)	2. $mm/min = RPM \cdot mm/rev$ where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. $m/min = RPM \cdot 0.003 \cdot DIA$ where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (mm)
---	--	--

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Metric (mm)

Replaceable Head Style | 7000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (mm) by Reamer Diameter*		
				11.80 mm - 21.60 mm	21.61 mm - 39.60 mm	39.61 mm - 80.60 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. *email: engineering.eu@alliedmachine.com*



Recommended Cutting Data | Metric (mm)

Replaceable Head Style | 9000 Series

ISO	Material	Hardness (BHN)	Speed (m/min)			Recommended Feed (mm/rev) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	11.80 mm - 21.60 mm		21.61 mm - 39.60 mm		39.61 mm - 40.60 mm	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 250	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 275	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 325	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180 - 375	4 - 8	60 - 120	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	4 - 8	60 - 120	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	Structural Steel A36, A285, A516	125 - 180	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		180 - 350	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	10 - 20	60 - 80	90 - 300	0.25 - 0.60	0.50 - 1.00	0.30 - 0.80	0.60 - 1.20	0.60 - 1.00	0.70 - 1.50
		200 - 250	7 - 15	40 - 70	80 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	6 - 10	15 - 30	-	0.20 - 0.40	-	0.30 - 0.50	-	0.40 - 0.60	-
	Titanium Alloy	140 - 310	6 - 10	15 - 30	-	0.20 - 0.40	-	0.30 - 0.50	-	0.40 - 0.60	-
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	6 - 10	40 - 60	50 - 60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	20 - 40	120 - 200	-	0.20 - 0.60	0.50 - 1.00	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
		> 200	15 - 30	120 - 200	-	0.20 - 0.60	0.50 - 1.00	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
	Spheroidal Cast Iron (Ferritic)	260 - 320	10 - 15	-	90 - 140	0.20 - 0.60	0.50 - 1.00	0.30 - 0.70	0.60 - 1.20	0.40 - 0.80	0.80 - 1.60
N	Copper and Alloys Brass	< 500	60 - 200	100 - 200	-	0.20 - 0.40	-	0.30 - 0.60	-	0.40 - 0.80	-
	Bronze	< 180	20 - 40	80 - 160	100 - 300	0.30 - 0.60	0.40 - 1.00	0.30 - 0.60	0.50 - 1.20	0.30 - 0.60	0.60 - 1.50
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	20 - 100	-	-	0.30 - 0.60	-	0.40 - 1.00	-	0.40 - 1.00	-

Formulas

1. RPM = m/min • 3.82 • DIA where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of reamer (mm)	2. mm/min = RPM • mm/rev where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. m/min = RPM • 0.003 • DIA where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (mm)
--	---	---

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Metric (mm)

Replaceable Head Style | 9000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (mm) by Reamer Diameter*		
				11.80 mm - 21.60 mm	21.61 mm - 39.60 mm	39.61 mm - 40.60 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
S	Structural Steel A36, A285, A516	125 - 180	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	180 - 350				
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200				
M	High-Temp Alloy Hastelloy B, Inconel 600, etc.	200 - 250	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Titanium Alloy	140 - 310				
K	Stainless Steel 400 Series 416, 420, etc.	140 - 310	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 350				
N	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Spheroidal Cast Iron (Ferritic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Recommended Cutting Data | Metric (mm)

Replaceable Head Style | 5000 Series

ISO Material	Hardness (BHN)	Speed (m/min)				Recommended Feed (mm/rev) by Reamer Diameter					
		Uncoated Carbide	Coated Carbide	Coated Cermet	Uncoated Cermet	9.61 mm - 17.60 mm		17.61 mm - 26.60 mm		26.61 mm - 32.60 mm	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100-180	15 - 20	60 - 80	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180-250	20 - 40	80 - 100	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85-180	15 - 20	60 - 80	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180-275	20 - 40	80 - 100	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125-180	15 - 20	60 - 80	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180-325	20 - 40	80 - 100	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Alloy Steel 4140, 5140, 8640, etc.	125-180	10 - 15	60 - 80	-	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180-375	8 - 10	60 - 80	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	High-Strength Alloy 4340, 4330V, 300M, etc.	240-450	8 - 10	60 - 80	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	Structural Steel A36, A285, A516	125-180	15 - 20	60 - 80	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		180-350	20 - 40	80 - 100	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150-200	15 - 20	60 - 80	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
		200-250	20 - 40	80 - 100	120 - 200	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140-310	5 - 7	20 - 30	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	Titanium Alloy	140-310	10 - 15	-	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
M	Stainless Steel 400 Series 416, 420, etc.	135-350	8 - 10	-	50 - 60	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135-275	8 - 10	30 - 40	-	0.25 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80	0.40 - 0.70	0.50 - 1.00
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	20 - 30	150 - 200	-	0.30 - 0.60	0.50 - 1.00	0.30 - 0.60	0.60 - 1.20	0.40 - 0.80	0.60 - 1.20
		> 200	15 - 20	-	100 - 200	0.30 - 0.60	0.50 - 1.00	0.30 - 0.60	0.60 - 1.20	0.40 - 0.80	0.60 - 1.20
	Spheroidal Cast Iron (Ferritic)	260-320	15 - 20	-	100 - 120	0.30 - 0.60	0.50 - 1.00	0.30 - 0.60	0.60 - 1.20	0.40 - 0.80	0.60 - 1.20
N	Copper and Alloys	< 500	80 - 100	100 - 200	-	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Brass										
	Bronze	< 180	40 - 80	80 - 160	-	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.50 - 0.90	0.60 - 1.20
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	100 - 300	100 - 300	100 - 300	0.30 - 0.60	0.50 - 1.00	0.30 - 0.60	0.60 - 1.20	0.40 - 0.80	0.60 - 1.20

Formulas

1. RPM = m/min • 3.82 • DIA where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of reamer (mm)	2. mm/min = RPM • mm/rev where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. m/min = RPM • 0.003 • DIA where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (mm)
--	---	---

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Metric (mm)

Replaceable Head Style | 5000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (mm) by Reamer Diameter*		
				9.61 mm - 17.60 mm	17.61 mm - 26.60 mm	26.61 mm - 32.60 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.15 - 0.25	0.20 - 0.40	0.30 - 0.40
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Recommended Cutting Data | Metric (mm)

Monobloc Style

ISO	Material	Hardness (BHN)	Speed (m/min)			Recommended Feed (mm/rev) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	5.80 mm - 10.00 mm		10.01 mm - 22.00 mm		22.01 mm - 32.10 mm	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	7 - 15	60 - 80	90 - 300	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
		180 - 250	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	7 - 15	60 - 80	90 - 300	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
		180 - 275	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	7 - 15	60 - 80	90 - 300	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
		180 - 325	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
		180 - 375	4 - 8	30 - 50	60 - 150	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	3 - 6	15 - 30	60 - 120	0.15 - 0.30	0.20 - 0.40	0.20 - 0.50	0.30 - 0.60	0.30 - 0.60	0.40 - 0.80
	Structural Steel A36, A285, A516	125 - 180	7 - 15	60 - 80	90 - 300	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
S		180 - 350	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	7 - 15	60 - 80	90 - 300	0.20 - 0.40	0.30 - 0.60	0.40 - 0.60	0.40 - 1.00	0.50 - 0.80	0.60 - 1.20
		200 - 250	6 - 10	40 - 70	80 - 200	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	4 - 10	30 - 50	—	0.15 - 0.30	—	0.20 - 0.40	—	0.30 - 0.50	—
	Titanium Alloy	140 - 310	4 - 15	30 - 50	—	0.15 - 0.30	—	0.20 - 0.40	—	0.30 - 0.50	—
	Stainless Steel 400 Series 416, 420, etc.	135 - 350	4 - 10	30 - 50	60 - 150	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	4 - 10	30 - 50	60 - 150	0.20 - 0.40	0.30 - 0.50	0.30 - 0.60	0.30 - 0.80	0.40 - 0.70	0.40 - 1.00
	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	15 - 30	50 - 70	—	0.20 - 0.40	0.30 - 0.60	0.35 - 0.60	0.50 - 0.80	0.40 - 1.00	0.60 - 1.50
	Spheroidal Cast Iron (Pearlitic)	> 200	10 - 20	50 - 70	—	0.20 - 0.40	0.30 - 0.60	0.35 - 0.60	0.50 - 0.80	0.40 - 1.00	0.60 - 1.50
	Spheroidal Cast Iron (Ferritic)	260 - 320	8 - 12	30 - 50	60 - 120	0.20 - 0.40	0.30 - 0.60	0.35 - 0.60	0.50 - 0.80	0.40 - 1.00	0.60 - 1.50
N	Copper and Alloys Brass	< 500	10 - 18	100 - 200	—	0.20 - 0.40	—	0.40 - 0.70	—	0.50 - 0.80	—
	Bronze	< 180	10 - 20	80 - 160	100 - 300	0.15 - 0.30	—	0.20 - 0.40	—	0.30 - 0.60	—
	Bronze Phosphorous	< 180	10 - 20	80 - 160	100 - 300	0.15 - 0.30	—	0.20 - 0.40	—	0.30 - 0.60	—
	Aluminum and Alloys	< 150	15 - 30	100 - 200	—	0.20 - 0.40	—	0.40 - 0.70	—	0.50 - 0.80	—

Formulas

1. RPM = m/min • 3.82 • DIA where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of reamer (mm)	2. mm/min = RPM • mm/rev where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. m/min = RPM • 0.003 • DIA where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (mm)
--	---	---

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Metric (mm)

Monobloc Style

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (mm) by Reamer Diameter*		
				5.80 mm - 10.00 mm	10.01 mm - 22.00 mm	22.01 mm - 32.10 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.08 - 0.15	0.15 - 0.25	0.15 - 0.30
		180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
		180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
		180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
		180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	Water Soluble / Cutting Oil	0.10 - 0.20	0.15 - 0.25	0.20 - 0.40
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.08 - 0.15	0.15 - 0.25	0.15 - 0.30
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.08 - 0.15	0.15 - 0.25	0.15 - 0.30
		> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys	< 500	Water Soluble	0.08 - 0.15	0.15 - 0.25	0.15 - 0.30
	Brass					
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous					
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

A
DRILLING

B
BORING

C
REAMING

D
BURNISHING

E
THREADING

X
SPECIALS



Recommended Cutting Data | Metric (mm)

Cutting Ring Style

ISO	Material	Hardness (BHN)	Speed (m/min)			Recommended Feed (mm/rev) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	17.60 mm - 40.00 mm		40.01 mm - 80.00 mm		80.01 mm - 200.00 mm	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	7 - 15	60 - 80	90 - 300	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		180 - 250	6 - 10	40 - 70	80 - 200	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	7 - 15	60 - 80	90 - 300	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		180 - 275	6 - 10	40 - 70	80 - 200	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	7 - 15	60 - 80	90 - 300	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		180 - 325	6 - 10	40 - 70	80 - 200	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	6 - 10	40 - 70	80 - 200	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		180 - 375	4 - 8	30 - 50	60 - 150	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	3 - 6	15 - 30	60 - 120	0.30 - 0.60	0.40 - 0.80	0.40 - 0.80	0.50 - 1.00	0.60 - 1.00	0.70 - 1.40
S	Structural Steel A36, A285, A516	125 - 180	7 - 15	60 - 80	90 - 300	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		180 - 350	6 - 10	40 - 70	80 - 200	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
T	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	7 - 15	60 - 80	90 - 300	0.50 - 0.80	0.60 - 1.20	0.50 - 1.00	0.80 - 1.60	0.80 - 1.50	1.00 - 2.20
		200 - 250	6 - 10	40 - 70	80 - 200	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
H	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	4 - 8	30 - 50	—	0.30 - 0.50	—	0.40 - 0.60	—	0.50 - 0.70	—
	Titanium Alloy	140 - 310	4 - 8	30 - 50	—	0.30 - 0.50	—	0.40 - 0.60	—	0.50 - 0.70	—
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	4 - 8	30 - 50	60 - 150	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	4 - 8	30 - 50	60 - 150	0.40 - 0.70	0.40 - 1.00	0.50 - 0.80	0.60 - 1.40	0.80 - 1.20	1.00 - 2.00
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	15 - 30	50 - 70	—	0.40 - 1.00	0.60 - 1.50	0.60 - 1.30	0.80 - 1.60	0.80 - 1.70	1.00 - 2.25
		> 200	10 - 20	50 - 70	—	0.40 - 1.00	0.60 - 1.50	0.60 - 1.30	0.80 - 1.60	0.80 - 1.70	1.00 - 2.25
	Spheroidal Cast Iron (Ferritic)	260 - 320	8 - 12	30 - 50	60 - 120	0.40 - 1.00	0.60 - 1.50	0.60 - 1.30	0.80 - 1.60	0.80 - 1.70	1.00 - 2.25
N	Copper and Alloys Brass	< 500	10 - 18	100 - 200	—	0.50 - 0.80	—	0.60 - 1.00	—	0.80 - 1.40	—
	Bronze	< 180	10 - 20	80 - 160	100 - 300	0.30 - 0.60	—	0.40 - 0.80	—	0.60 - 1.00	—
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	15 - 30	100 - 200	—	0.50 - 0.80	—	0.60 - 1.00	—	0.80 - 1.40	—

Formulas

1. RPM = m/min • 3.82 • DIA where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of reamer (mm)	2. mm/min = RPM • mm/rev where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. m/min = RPM • 0.003 • DIA where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (mm)
--	---	---

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Metric (mm)

Cutting Ring Style

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (mm) by Reamer Diameter*		
				17.60 mm - 40.00 mm	40.01 mm - 80.00 mm	80.01 mm - 200.00 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.15 - 0.30	0.20 - 0.40	0.25 - 0.50
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.15 - 0.30	0.20 - 0.40	0.25 - 0.50
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.15 - 0.30	0.20 - 0.40	0.25 - 0.50
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.15 - 0.30	0.20 - 0.40	0.25 - 0.50
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.15 - 0.30	0.20 - 0.40	0.25 - 0.50
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Recommended Cutting Data | Imperial (inch)

Replaceable Head Style | 7000 Series

ISO	Material	Hard- ness (BHN)	Speed (SFM)			Recommended Feed (IPR) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	0.4646" - 0.8504"		0.8505" - 1.5590"		1.5591" - 3.1732"	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 250	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 275	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 325	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
		180 - 375	13 - 26	131 - 164	197 - 394	0.010 - 0.020	0.012 - 0.024	0.012 - 0.024	0.016 - 0.031	0.016 - 0.028	0.020 - 0.039
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	13 - 26	131 - 164	197 - 394	0.010 - 0.020	0.012 - 0.024	0.012 - 0.024	0.016 - 0.031	0.016 - 0.028	0.020 - 0.039
	Structural Steel A36, A285, A516	125 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 350	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		200 - 250	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	13 - 33	98 - 164	—	0.008 - 0.016	—	0.012 - 0.020	—	0.016 - 0.024	—
	Titanium Alloy	140 - 310	13 - 49	98 - 164	—	0.008 - 0.016	—	0.012 - 0.020	—	0.016 - 0.024	—
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	66 - 131	394 - 656	—	0.008 - 0.024	0.020 - 0.039	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
		> 200	49 - 98	394 - 656	—	0.008 - 0.024	0.020 - 0.039	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
	Spheroidal Cast Iron (Ferritic)	260 - 320	33 - 49	—	295 - 459	0.008 - 0.024	0.020 - 0.024	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
N	Copper and Alloys Brass	< 500	197 - 656	328 - 656	—	0.008 - 0.016	—	0.012 - 0.024	—	0.016 - 0.031	—
	Bronze	< 180	66 - 131	262 - 525	328 - 984	0.012 - 0.024	0.016 - 0.039	0.012 - 0.024	0.020 - 0.047	0.012 - 0.024	0.024 - 0.059
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	66 - 328	—	—	0.012 - 0.024	—	0.016 - 0.039	—	0.016 - 0.039	—

Formulas

1. RPM = (SFM • 3.82) / DIA where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of reamer (inch)	2. IPM = RPM • IPR where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. SFM = RPM • 0.262 • DIA where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (inch)
---	---	--

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Imperial (inch)

Replaceable Head Style | 7000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (inch) by Reamer Diameter*		
				0.4646" - 0.8504"	0.8505" - 1.5590"	1.5591" - 3.1732"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. *email: engineering.eu@alliedmachine.com*

A
DRILLING

B
BORING

C
REAMING

D
BURNISHING

E
THREADING

X
SPECIALS



Recommended Cutting Data | Imperial (inch)

Replaceable Head Style | 9000 Series

ISO	Material	Hard- ness (BHN)	Speed (SFM)			Recommended Feed (IPR) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	0.4646" - 0.8504"		0.8505" - 1.5590"		1.5591" - 1.5984"	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 250	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 275	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 325	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
		180 - 375	13 - 26	197 - 394	-	0.010 - 0.020	0.012 - 0.024	0.012 - 0.024	0.016 - 0.031	0.016 - 0.028	0.020 - 0.039
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	13 - 26	197 - 394	-	0.010 - 0.020	0.012 - 0.024	0.012 - 0.024	0.016 - 0.031	0.016 - 0.028	0.020 - 0.039
	Structural Steel A36, A285, A516	125 - 180	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		180 - 350	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	33 - 66	197 - 262	295 - 984	0.010 - 0.024	0.020 - 0.039	0.012 - 0.031	0.024 - 0.047	0.024 - 0.039	0.028 - 0.059
		200 - 250	23 - 49	131 - 230	262 - 656	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	20 - 33	49 - 98	-	0.008 - 0.016	-	0.012 - 0.020	-	0.016 - 0.024	-
	Titanium Alloy	140 - 310	20 - 33	49 - 98	-	0.008 - 0.016	-	0.012 - 0.020	-	0.016 - 0.024	-
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	20 - 33	131 - 197	164 - 197	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.020 - 0.035	0.024 - 0.047
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	66 - 131	394 - 656	-	0.008 - 0.024	0.020 - 0.039	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
		> 200	49 - 98	394 - 656	-	0.008 - 0.024	0.020 - 0.039	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
	Spheroidal Cast Iron (Ferritic)	260 - 320	33 - 49	-	295 - 459	0.008 - 0.024	0.020 - 0.039	0.012 - 0.028	0.024 - 0.047	0.016 - 0.031	0.031 - 0.063
N	Copper and Alloys Brass	< 500	197 - 656	328 - 656	-	0.008 - 0.016	-	0.012 - 0.024	-	0.016 - 0.031	-
	Bronze	< 180	66 - 131	262 - 525	328 - 984	0.012 - 0.024	0.016 - 0.039	0.012 - 0.024	0.020 - 0.047	0.012 - 0.024	0.024 - 0.059
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	66 - 328	-	-	0.012 - 0.024	-	0.016 - 0.039	-	0.016 - 0.039	-

Formulas

1. RPM = (SFM • 3.82) / DIA where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of reamer (inch)	2. IPM = RPM • IPR where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. SFM = RPM • 0.262 • DIA where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (inch)
---	---	--

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Stock Allowance and Coolant | Imperial (inch)

Replaceable Head Style | 9000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (inch) by Reamer Diameter*		
				0.4646" - 0.8504"	0.8505" - 1.5590"	1.5591" - 1.5984"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
		180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
		180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
		180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
		180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron,	< 200	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys	< 500	Water Soluble	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Brass					
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous					
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Recommended Cutting Data | Imperial (inch)

Replaceable Head Style | 5000 Series

ISO Material		Hardness (BHN)	Speed (SFM)				Recommended Feed (IPR) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Coated Cermet	Uncoated Cermet	0.4646" - 0.8504"		0.8505" - 1.5590"		1.5591" - 1.5984"	
							Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100-180	49-66	197-262	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		180-250	66-131	262-328	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85-180	49-66	197-262	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		180-275	66-131	262-328	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125-180	49-66	197-262	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		180-325	66-131	262-328	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Alloy Steel 4140, 5140, 8640, etc.	125-180	33-49	197-262	-	328-492	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		180-375	26-33	197-262	-	-	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
	High-Strength Alloy 4340, 4330V, 300M, etc.	240-450	26-33	197-262	-	-	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
	Structural Steel A36, A285, A516	125-180	49-66	197-262	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		180-350	66-131	262-328	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150-200	49-66	197-262	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
		200-250	66-131	262-328	394-656	394-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140-310	16-23	66-98	-	-	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
	Titanium Alloy	140-310	33-49	-	-	-	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
M	Stainless Steel 400 Series 416, 420, etc.	135-350	26-33	-	-	164-197	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135-275	26-33	98-131	-	-	0.010-0.020	0.012-0.024	0.012-0.024	0.016-0.031	0.016-0.028	0.020-0.039
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	66-98	492-656	-	-	0.012-0.024	0.020-0.039	0.012-0.024	0.024-0.047	0.016-0.031	0.024-0.047
		> 200	49-66	-	328-656	-	0.012-0.024	0.020-0.039	0.012-0.024	0.024-0.047	0.016-0.031	0.024-0.047
	Spheroidal Cast Iron (Ferritic)	260-320	49-66	-	328-394	-	0.012-0.024	0.020-0.039	0.012-0.024	0.024-0.047	0.016-0.031	0.024-0.047
N	Copper and Alloys	< 500	262-328	328-656	-	-	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Brass											
	Bronze	< 180	131-262	262-525	-	492-656	0.012-0.024	0.016-0.031	0.016-0.031	0.020-0.039	0.020-0.035	0.024-0.047
	Bronze Phosphorous											
	Aluminum and Alloys	< 150	328-984	328-984	328-984	328-984	0.012-0.024	0.020-0.039	0.012-0.024	0.024-0.047	0.016-0.031	0.024-0.047

Formulas

1. RPM = (SFM • 3.82) / DIA	2. IPM = RPM • IPR	3. SFM = RPM • 0.262 • DIA
where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of reamer (inch)	where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (inch)

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Imperial (inch)

Replaceable Head Style | 5000 Series

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (inch) by Reamer Diameter*		
				0.4646" - 0.8504"	0.8505" - 1.5590"	1.5591" - 2.3858"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.006 - 0.010	0.008 - 0.016	0.012 - 0.016
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Recommended Cutting Data | Imperial (inch)

Monobloc Style

ISO	Material	Hardness (BHN)	Speed (SFM)			Recommended Feed (IPR) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	0.2283" - 0.3940"		0.3941" - 0.7090"		0.7091" - 1.2638"	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	25 - 50	200 - 260	300 - 980	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		180 - 250	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	25 - 50	200 - 260	300 - 980	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		180 - 275	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	25 - 50	200 - 260	300 - 980	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		180 - 325	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		180 - 375	15 - 25	100 - 160	200 - 490	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	10 - 20	50 - 100	200 - 390	0.006 - 0.012	0.008 - 0.016	0.008 - 0.020	0.012 - 0.024	0.012 - 0.024	0.016 - 0.031
	Structural Steel A36, A285, A516	125 - 180	25 - 50	200 - 260	300 - 980	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		180 - 350	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	25 - 50	200 - 260	300 - 980	0.008 - 0.016	0.012 - 0.024	0.016 - 0.024	0.016 - 0.047	0.020 - 0.031	0.024 - 0.047
		200 - 250	20 - 35	130 - 230	260 - 660	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	15 - 25	60 - 200	—	0.006 - 0.012	—	0.008 - 0.016	—	0.012 - 0.020	—
	Titanium Alloy	140 - 310	15 - 25	60 - 200	—	0.006 - 0.012	—	0.008 - 0.016	—	0.012 - 0.020	—
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	15 - 25	100 - 160	200 - 490	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	15 - 25	100 - 160	200 - 490	0.008 - 0.016	0.012 - 0.020	0.012 - 0.024	0.012 - 0.031	0.016 - 0.028	0.016 - 0.047
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	50 - 100	160 - 230	—	0.008 - 0.016	0.012 - 0.024	0.014 - 0.024	0.020 - 0.031	0.016 - 0.047	0.024 - 0.059
		> 200	35 - 65	160 - 230	—	0.008 - 0.016	0.012 - 0.024	0.014 - 0.024	0.020 - 0.031	0.016 - 0.047	0.024 - 0.059
	Spheroidal Cast Iron (Ferritic)	260 - 320	25 - 40	100 - 160	200 - 400	0.008 - 0.016	0.012 - 0.024	0.014 - 0.024	0.020 - 0.031	0.016 - 0.047	0.024 - 0.059
N	Copper and Alloys Brass	< 500	35 - 60	330 - 660	—	0.008 - 0.016	—	0.016 - 0.028	—	0.020 - 0.031	—
	Bronze	< 180	35 - 65	260 - 520	330 - 980	0.006 - 0.012	—	0.008 - 0.016	—	0.012 - 0.024	—
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	50 - 100	330 - 660	—	0.008 - 0.016	—	0.016 - 0.028	—	0.020 - 0.031	—

Formulas

1. RPM = (SFM • 3.82) / DIA where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of reamer (inch)	2. IPM = RPM • IPR where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. SFM = RPM • 0.262 • DIA where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (inch)
---	---	--

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Imperial (inch)

Monobloc Style

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (inch) by Reamer Diameter*		
				0.2283" - 0.3940"	0.3941" - 0.7090"	0.7091" - 1.2638"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	85 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 325				
	Structural Steel A36, A285, A516	125 - 180				
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	180 - 375				
		240 - 450				
		125 - 180				
		180 - 350				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	Water Soluble / Cutting Oil	0.008 - 0.016	0.012 - 0.016	0.012 - 0.020
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Spheroidal Cast Iron (Ferritic)	> 200				
		260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous		Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. *email: engineering.eu@alliedmachine.com*



Recommended Cutting Data | Imperial (inch)

Cutting Ring Style

ISO	Material	Hard- ness (BHN)	Speed (SFM)			Recommended Feed (IPR) by Reamer Diameter					
			Uncoated Carbide	Coated Carbide	Cermet	0.6929" - 1.5750"		1.5751" - 3.1500"		3.1501" - 7.8972"	
						Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M	Lead A, G	Lead E, N, M
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	25 - 50	200 - 260	300 - 980	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		180 - 250	20 - 35	130 - 230	260 - 660	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180	25 - 50	200 - 260	300 - 980	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		180 - 275	20 - 35	130 - 230	260 - 660	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180	25 - 50	200 - 260	300 - 980	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		180 - 325	20 - 35	130 - 230	260 - 660	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180	20 - 35	130 - 230	260 - 660	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		180 - 375	15 - 25	100 - 160	200 - 490	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450	10 - 20	50 - 100	200 - 390	0.012 - 0.024	0.016 - 0.031	0.016 - 0.031	0.020 - 0.039	0.024 - 0.039	0.028 - 0.055
	Structural Steel A36, A285, A516	125 - 180	25 - 50	200 - 260	300 - 980	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		180 - 350	20 - 35	130 - 230	260 - 660	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	25 - 50	200 - 260	300 - 980	0.020 - 0.031	0.024 - 0.047	0.020 - 0.039	0.031 - 0.063	0.031 - 0.059	0.039 - 0.087
		200 - 250	20 - 35	130 - 230	260 - 660	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	15 - 25	60 - 200	—	0.012 - 0.020	—	0.016 - 0.024	—	0.020 - 0.028	—
	Titanium Alloy	140 - 310	15 - 25	60 - 200	—	0.012 - 0.020	—	0.016 - 0.024	—	0.020 - 0.028	—
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	15 - 25	100 - 160	200 - 490	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	15 - 25	100 - 160	200 - 490	0.016 - 0.028	0.016 - 0.039	0.020 - 0.031	0.024 - 0.055	0.031 - 0.047	0.039 - 0.079
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	50 - 100	160 - 230	—	0.016 - 0.039	0.024 - 0.059	0.024 - 0.051	0.031 - 0.063	0.031 - 0.067	0.039 - 0.088
	Spheroidal Cast Iron (Pearlitic)	> 200	35 - 65	160 - 230	—	0.016 - 0.039	0.024 - 0.059	0.024 - 0.051	0.031 - 0.063	0.031 - 0.067	0.039 - 0.088
	Spheroidal Cast Iron (Ferritic)	260 - 320	25 - 40	100 - 160	200 - 400	0.016 - 0.039	0.024 - 0.059	0.024 - 0.051	0.031 - 0.063	0.031 - 0.067	0.039 - 0.088
N	Copper and Alloys Brass	< 500	35 - 60	330 - 660	—	0.020 - 0.031	—	0.024 - 0.039	—	0.031 - 0.055	—
	Bronze	< 180	35 - 65	260 - 520	330 - 980	0.012 - 0.024	—	0.016 - 0.031	—	0.024 - 0.039	—
	Bronze Phosphorous										
	Aluminum and Alloys	< 150	50 - 100	330 - 660	—	0.020 - 0.031	—	0.024 - 0.039	—	0.031 - 0.055	—

Formulas

1. RPM = (SFM • 3.82) / DIA where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of reamer (inch)	2. IPM = RPM • IPR where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. SFM = RPM • 0.262 • DIA where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of reamer (inch)
---	---	--

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com

Stock Allowance and Coolant | Imperial (inch)

Cutting Ring Style

ISO	Material	Hardness (BHN)	Coolant	Recommended Stock (inch) by Reamer Diameter*		
				0.6929" - 1.5750"	1.5751" - 3.1500"	3.1501" - 7.8972"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 180	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	180 - 250				
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 180				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	180 - 275				
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 180				
	Alloy Steel 4140, 5140, 8640, etc.	180 - 325				
	Alloy Steel 4140, 5140, 8640, etc.	125 - 180				
	High-Strength Alloy 4340, 4330V, 300M, etc.	180 - 375				
	High-Strength Alloy 4340, 4330V, 300M, etc.	240 - 450				
	Structural Steel A36, A285, A516	125 - 180				
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	180 - 350	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Titanium Alloy	140 - 310				
	Titanium Alloy	140 - 310				
M	Stainless Steel 400 Series 416, 420, etc.	135 - 350	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275				
K	Grey Cast Iron, Ductile Cast Iron, Spheroidal Cast Iron (Pearlitic)	< 200	Water Soluble / Cutting Oil	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Spheroidal Cast Iron (Pearlitic)	> 200				
	Spheroidal Cast Iron (Ferritic)	260 - 320				
N	Copper and Alloys Brass	< 500	Water Soluble	0.006 - 0.012	0.008 - 0.016	0.010 - 0.020
	Bronze	< 180	Water Soluble / Cutting Oil			
	Bronze Phosphorous	< 180	Water Soluble / Cutting Oil			
	Aluminum and Alloys	< 150	Water Soluble / Cutting Oil			

*Stock value is on diameter.

IMPORTANT: The speeds and feeds listed on these pages are a general starting point for all applications. Factory technical assistance is also available for specific applications through our Application Engineering department. email: engineering.eu@alliedmachine.com



Setup Information

Replaceable Head Style | 7000 Series

Fixed Head Style



Tolerance: Fixed reamers are manufactured at 2/3 of the tolerance.

Recommended Tightening Torque

Metric		Imperial	
D ₁ Range (mm)	Torque (N-m)	D ₁ Range (inch)	Torque (in-lbs)
11.800 - 14.609	2.5	0.4646 - 0.5751	22.13
14.610 - 17.609	3.5	0.5752 - 0.6932	30.98
17.610 - 21.609	5.0	0.6933 - 0.8507	44.25
21.610 - 26.609	7.0	0.8508 - 1.0475	61.96
26.610 - 32.609	10.0	1.0476 - 1.2838	88.51
32.610 - 40.609	12.0	1.2839 - 1.5987	106.21
40.610 - 50.609	16.0	1.5988 - 1.9924	141.61
50.610 - 60.609	20.0	1.9925 - 2.3862	177.01

Expandable Head Style



Tolerance: Expandable reamers are manufactured to the middle of the tolerance.

Expanding Heads Adjustment


When the size reaches its lower tolerance, the head can be adjusted to compensate for wear to the cutting edges. This operation can be repeated several times until the surface finish of the hole deteriorates to an unacceptable level.

Adjustment Procedure

Slowly turn the right-hand threaded screw clockwise while checking the diameter setting of the reamer with a micrometer. When the required diameter is achieved, the tool is ready for use.

Replaceable Head Reamer 7000 Series Assembly

Fixed and Expandable Styles

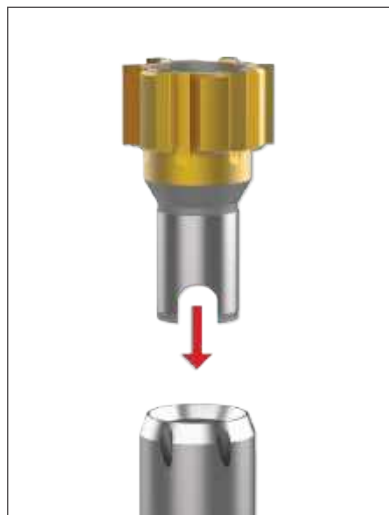

Step 1:
Insert the replaceable reamer head into the mandrel.



Step 2:
Insert the screw into the reamer head opening to secure it to the mandrel.




Step 3:
Tighten the screw.

NOTE: We recommend lubricating the thread and the conical surface of contact between the reamer head and the screw with antifriction Molycote® grease.

Setup Information

Replaceable Head Style | 9000 Series

Fixed Head Style

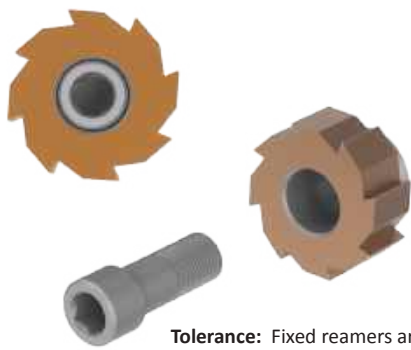


Tolerance: Fixed reamers are manufactured at 2/3 of the tolerance.


Recommended Tightening Torque

Metric		Imperial	
D ₁ Range (mm)	Torque (N-m)	D ₁ Range (inch)	Torque (in-lbs)
11.800 - 14.609	2.5	0.4646 - 0.5751	22.13
14.610 - 17.609	3.5	0.5752 - 0.6932	30.98
17.610 - 21.609	4.5	0.6933 - 0.8507	39.83
21.610 - 26.609	6.0	0.8508 - 1.0475	53.10
26.610 - 32.609	10.0	1.0476 - 1.2838	88.51
32.610 - 40.600	12.0	1.2839 - 1.5984	106.21

Replaceable Head Reamer 9000 Series Assembly

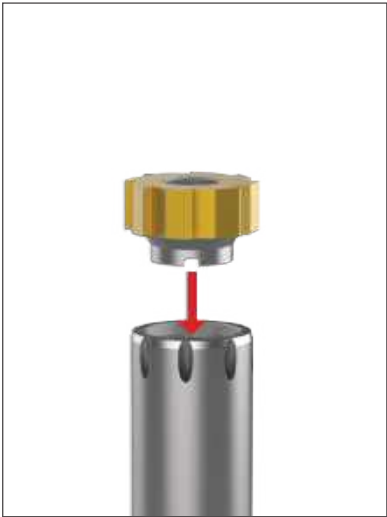

Step 1:
Carefully clean the connecting surfaces and insert the replaceable reamer head into the mandrel.

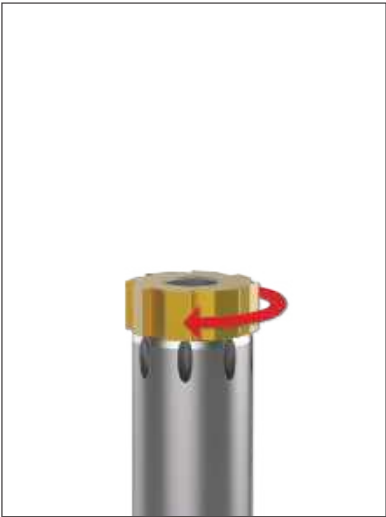

Step 2:
Screw the head in by hand clockwise until it makes contact with the mandrel.



Step 3:
Tighten the screw according to the predetermined value in the table.

NOTE: We recommend lubricating the thread of the screw with antifriction Molycote® grease.



Setup Information

Replaceable Head Style | 5000 Series

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING

X

SPECIALS

Expandable Head Style



Tolerance: Expandable reamers are manufactured to the middle of the tolerance.

Expanding Heads Adjustment


When the size reaches its lower tolerance, the head can be adjusted to compensate for wear to the cutting edges. This operation can be repeated several times until the surface finish of the hole deteriorates to an unacceptable level.

Replaceable Head Reamer 5000 Series Assembly



Step 1:

Carefully clean the connecting surfaces and insert the replaceable reamer head into the mandrel. Screw it in by hand clockwise.

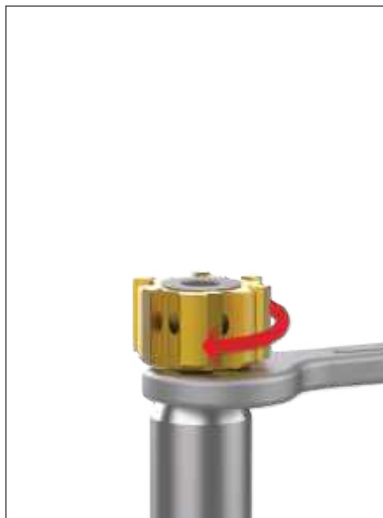

Step 2:

Tighten the replaceable head down with a wrench until the flat surface of the head is in complete contact with the mandrel.



Step 3:

Compensate for wear by adjusting the front expansion screw while using a wrench to keep the head still.

Setup Information

Monobloc Style



Tolerance

All monobloc reamers are ground to the requested diameter and set in the middle of the hole tolerance ready for use.

Adjustment

The adjustment must be made to compensate for wear to the cutting edges when the size reaches its lower tolerance. This operation can be repeated several times until the surface finish of the hole deteriorates to an unacceptable level. Then the reamer must be reground. The maximum expansion is about 1% of the diameter.

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING

X

SPECIALS




Setup Information

Cutting Ring Style


Drive Pin
(11:00 position)

Dimples
(12:00 position)




Step 1:

With the drive pins assembled, insert the cutting ring onto the mandrel. Make sure the dimples are at the 12:00 position with the drive pin at the 11:00 position.

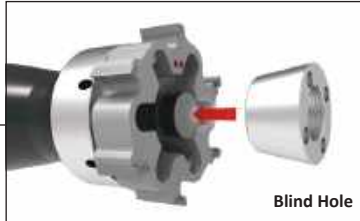

Blind Hole

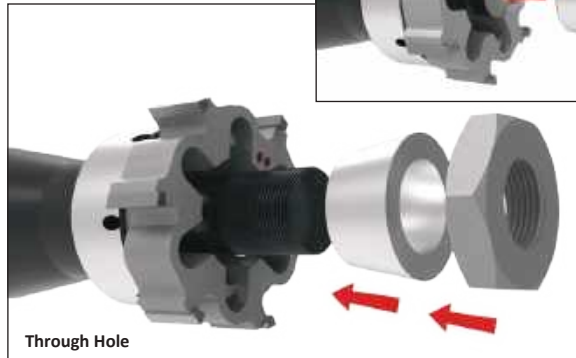


Through Hole

Step 2:

Insert the conical ring. Tighten the lock nut to set the desired reamer size (left-hand thread). Then loosen the lock nut slightly until it "clicks" against the drive wall.

NOTE: We recommend lubricating the thread and the conical surface of contact between the cutting ring and the conical ring with antifriction Molycote® grease.

For Diameter Range: 100.600 mm - 200.600 mm

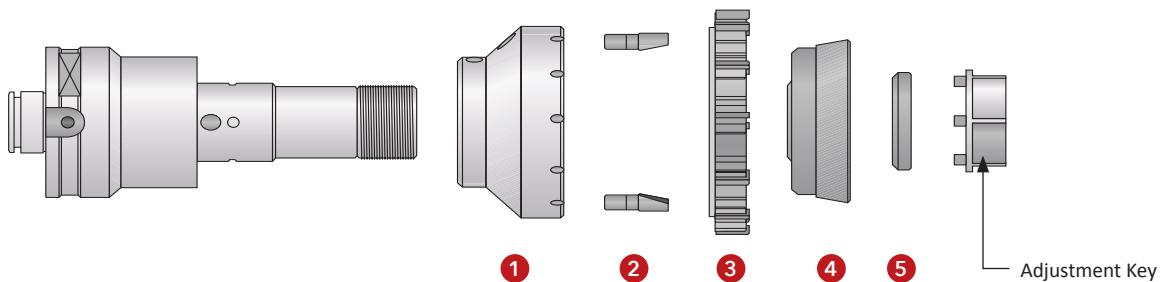

Assembly

1. With the drive pins (2) assembled, mount the flange (1) onto the mandrel. Assemble the cutting ring (3) so the slot on the left side of the dimple is mounted onto the drive pins (2). Insert the conical ring (4).
2. Screw the ring nut (5) onto the mandrel and tighten manually so the conical ring (4) makes contact with the cutting ring (3). The thread is left handed.

NOTE: We recommend lubricating the thread and the conical surface of contact between the cutting ring and the conical ring with antifriction Molycote grease.

Adjustment Procedure


1. Turn the ring nut (5) slowly using a pin spanner.
2. Check the diameter setting of the cutting ring with a micrometer. Make sure the drive pins (2) are in traction and in the opposite direction of the cutting action of the reamer.
3. When the required diameter is achieved, the tool is ready to use.



Adjustment Procedure

1. Turn the conical ring slowly using an adjustment key (left-hand thread). Adjustment keys are supplied with reamers from diameter 17.600 mm to 40.599 mm.
2. Check the diameter setting of the cutting ring with a micrometer.
3. When the required diameter is achieved, unscrew the conical ring until there is a click and the drive pins are in traction in the opposite direction to the cutting action of the reamer. The reamer is ready for use.

Diameter Measurement


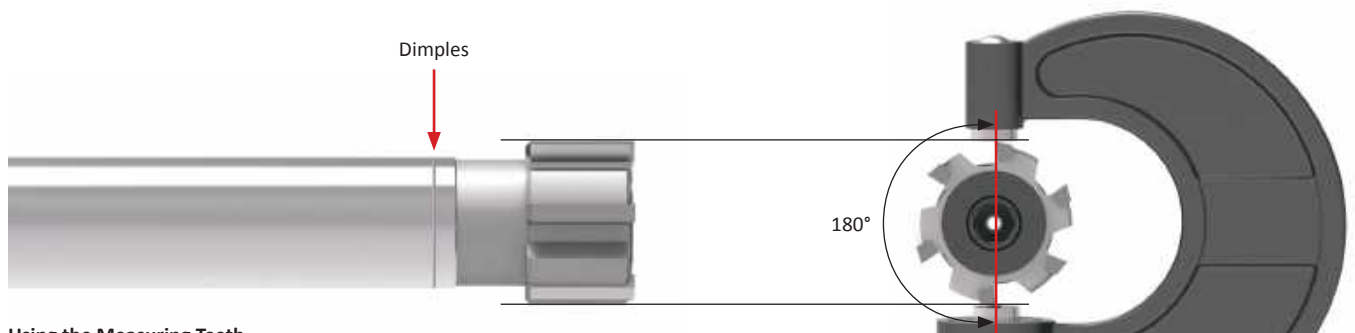


Using the Measuring Teeth

With the reamer assembled, use a presetter or micrometers to measure the reamer diameter using the opposing 180° teeth. A presetter (with at least 2 μm resolution) is preferred to avoid chipping the cutting edges.

NOTE: Only two cutting teeth are 180° opposed. The asymmetric spacing of the other cutting teeth will not induce harmonics, which prevents the tool from creating chatter.


The red dimples indicate which two opposing teeth are the measuring teeth. All S.C.A.M.I. Reamers have a dimple to indicate the 180° opposing teeth.

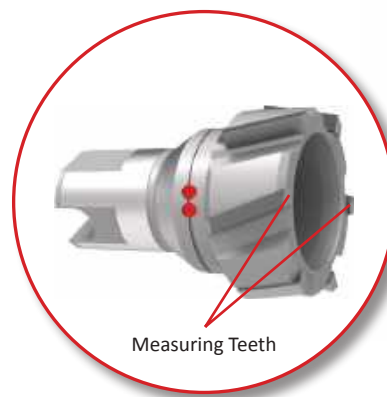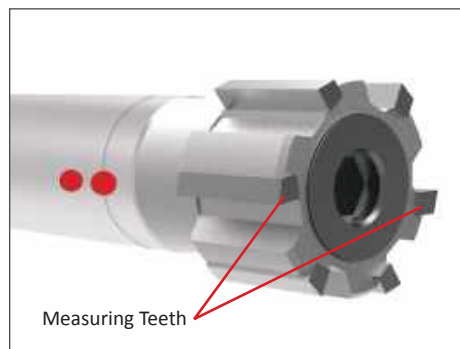

Where to Take the Measurement

When measuring the diameter, take the measurement from the area of the cutting tooth just below the transition from the lead angle to the OD edge. See the illustration below.

The back side of the OD edge has a back taper. This is why measuring from the location just below the lead angle/OD edge transition point results in the most accurate measurement (before the taper begins).

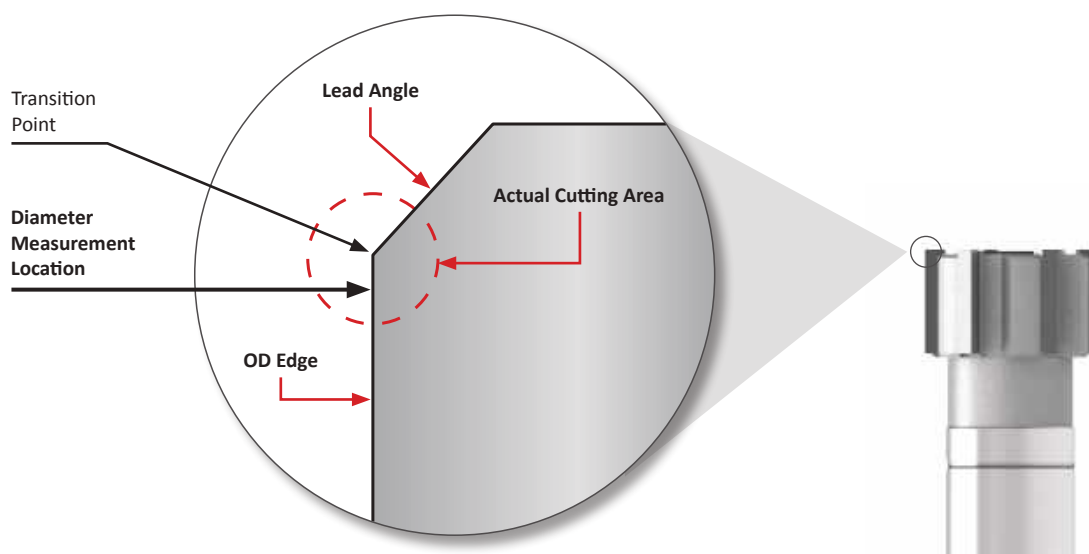



TIR Measurement


What is TIR?

Total indicator runout (TIR) refers to the distance to which the reamer is cutting off-centre. In an ideal situation, the tool would begin in the exact centre of the hole, and it would then rotate and cut in a perfect circle. This would result in a TIR of 0.


Because a perfect TIR of 0 is not practical, the goal is to maintain a TIR as close to 0 as possible. The closer the TIR is to 0, the better the reamer will perform.

Allied Machine recommends a TIR of < 0.013 mm (0.0005").

Think of attempting to draw a perfect circle with a drafting compass, but the pencil runs slightly outside the point where the circle began because the centre point shifted during the pencil's path. This slight area of overlap would be the TIR.

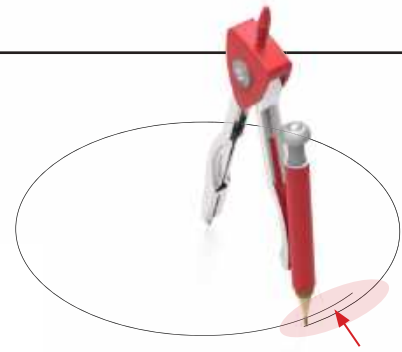


TIR: How far from centre the tool will move during its path.

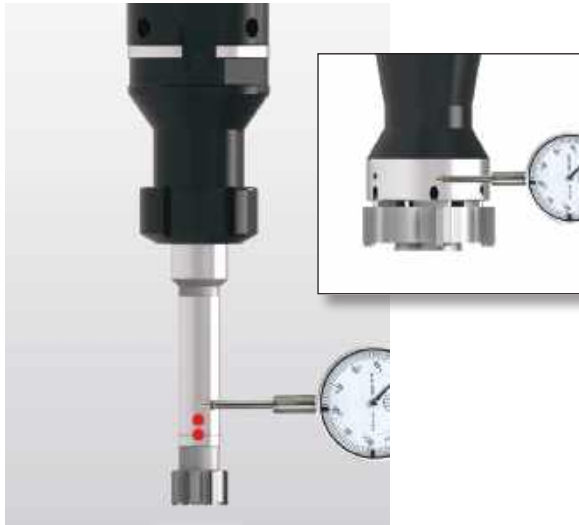

Step 1:

Check the TIR first on the mandrel (or ground) area of the reamer. Centre the indicator in line with the dimple.

Measure the TIR by rotating the tool until the indicator reaches the highest value.

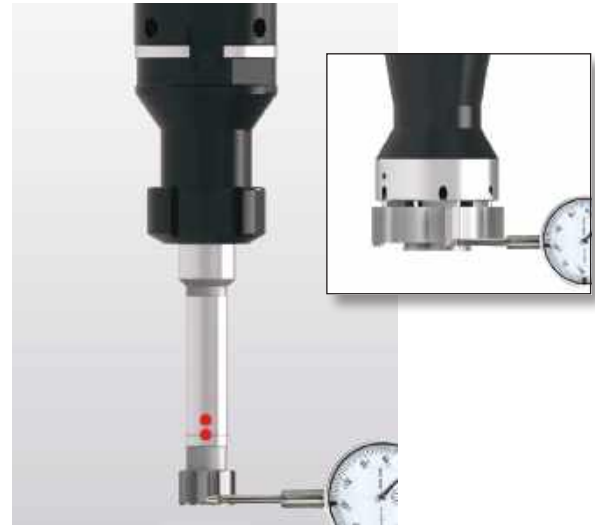


Step 2:

Next, check the TIR on the cutting teeth of the reamer.

NOTE: Rotate the tool counterclockwise to avoid chipping the cutting teeth with the indicator.

TIR Adjustment

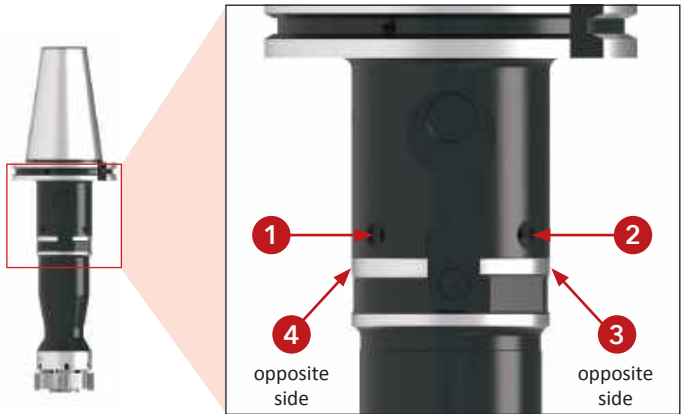

Step 1:

Place the tool into the machine spindle. Make contact with the four radial adjustment screws in a concentric fashion (this results in equal pressure surrounding the tool).

Tighten #1, then #3, followed by #2 and #4.



Step 2:

Swipe the dial indicator around the ground portion of the arbor near the coolant outlet holes to verify the TIR.

The TIR should be within 0.013 mm (0.0005") (as close to 0 as possible). This will ensure the TIR check on the cutting teeth will be more true. It also means the arbor is running true to the shank.

Step 3:

Once the TIR is checked on the arbor, check the TIR on the cutting teeth. Rotate the tool counterclockwise to avoid chipping the cutting teeth.



Clamping Screw

Step 4:


Tighten down the central clamping screws. During the tightening, the tool body will shift slightly. Repeat the TIR check on the cutting teeth and adjust as necessary.



Troubleshooting Guide

A

DRILLING




Oversized Hole

- Reamer is running eccentric to the centre of the machine spindle. ▶ Use modular system with radial adjustment.
- Excessive misalignment causing reamer to cut on back taper. ▶ Fix the misalignment.
- Material buildup on cutting edges. ▶ Replace the coolant or change the cutting speed.
- Reamer diameter is too large. ▶ Use smaller reamer or regrind existing reamer.

B

BORING




Undersized Hole

- The reamer diameter is too small. ▶ Use larger reamer.
- The reamer diameter is worn. ▶ Expand, regrind, or replace the reamer.
- The coolant is not suitable. ▶ Replace the coolant.
- Stock allowance is too small. ▶ Increase the stock allowance.
- The cutting speed is too low. ▶ Increase the cutting speed.


C

REAMING




Tapered Hole

- Excessive misalignment. ▶ Correct the misalignment.



Burr at Hole Entry

- Excessive misalignment. ▶ Correct the misalignment.




Hole is Not Straight

- Concentricity and alignment error between the workpiece and the tool. ▶ Correct the misalignment and use the modular system with radial adjustment.
- Asymmetrical cutting or angled surfaces. ▶ Create a chamfer on the lead-in.

D

BURNISHING




Poor Hole Finish

- One cutting edge is chipped. ▶ Regrind the reamer.
- The lead-in is irregular. ▶ Regrind the reamer.
- Back taper on the cutting edge is too great. ▶ Regrind the reamer.
- Excessive misalignment. ▶ Correct the misalignment or use the modular system.
- Cutting data is not correct. ▶ Verify the cutting data.
- Poor chip evacuation. ▶ Verify the coolant volume and pressure or use through-tool coolant.

E

THREADING



Reamer Creates Excessive Torque Loading

- Back taper on the cutting edge is too small. ▶ Regrind the reamer.
- The radially ground land is too wide. ▶ Regrind the reamer.
- The coolant is not suitable. ▶ Replace the coolant.

X

SPECIALS

SPECIALS

Boring, Reaming & Roller Burnishing Guaranteed Application Form

*The following must be filled out completely before your test will be considered

CONTACT DETAILS

Trial P.O. No.* Date* Proposed Test Date*
Favoured Distributor* Distributor Contact*
Customer Name* Industry..... Contact Name*

Current Process List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing

Test Objective List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.)

APPLICATION INFORMATION

Hole Diameter:	_____ mm/in	Tolerance:	_____	Material:	_____
					(4150, A36, cast iron, etc.)
Pre-existing Diameter:	_____ mm/in	Depth of Cut:	_____ mm/in	Hardness:	_____
					(Rc, BHN, Kg)
Required Finish:	_____ µm	☐ Blind	☐ Through Hole	State:	_____
					(Casting, hot rolled, forging)

MACHINE INFORMATION

Machine Type:	_____	Builder:	_____	Model #:	_____
	(Lathe, screw machine, machine center, etc.)		(Haas, Mori Seiki, etc.)		
Shank Required:	_____			Power:	_____ KW/HP
	(DIN50, Morse taper, etc.)				
Rigidity:	Orientation:	Tool Rotating:		Thrust:	_____ kN
☐ Excellent	☐ Vertical	☐ Yes		Max RPM:	_____ RPM
☐ Good	☐ Horizontal	☐ No			
☐ Poor					

COOLANT INFORMATION

Coolant Delivery:	_____	Coolant Pressure:	_____ Bar / PSI
	(Through tool, flood)		
Coolant Type:	_____	Coolant Volume:	_____ LPM / GPM
	(Air mist, oil, synthetic, water soluble, etc.)		

REQUESTED TOOLING

QTY	Item Number

QTY	Item Number

QTY	Item Number

FOR OFFICE USE ONLY
Application Engineer:

Number:

Status:

engineering.eu@alliedmachine.com
Allied Machine & Engineering Co. (Europe) Ltd
93 Vantage Point, Pensnett Estate,
Kingswinford, DY6 7FR, United Kingdom
+44 (0)1384 400 900
www.alliedmachine.com



ALLIED MACHINE
& ENGINEERING

WOHLHAUPTER
Holmaking Solutions for Today's Manufacturing

Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine &
Engineering Co. Europe
Ltd. is registered to
ISO 9001:2015 by bsi.



Allied Machine &
Engineering is registered to
ISO 9001:2015 by DQS.



Wohlhaupter GmbH is
registered to ISO 9001:2015
by QUACERT.

Europe

Allied Machine & Engineering Co. (Europe) Ltd

93 Vantage Point
Pensnett Estate
Kingswinford
West Midlands
DY6 7FR England

Phone:

+44 (0) 1384 400 900

Wohlhaupter® GmbH

Maybachstrasse 4
Postfach 1264
72636 Frickenhausen
Germany

Phone:

+49 (0) 7022 408-0

United States

Allied Machine & Engineering

120 Deeds Drive
Dover OH 44622
United States

Phone:

+1.330.343.4283

Toll Free USA and Canada:

800.321.5537

Toll Free USA and Canada:

800.223.5140

Allied Machine & Engineering

485 W Third Street
Dover OH 44622
United States

Phone:

+1.330.343.4283

Toll Free USA and Canada:

800.321.5537

Asia

Wohlhaupter® India Pvt. Ltd.

B-23, 3rd Floor
B Block Community Centre
Janakpuri, New Delhi - 110058
India

Phone:

+91 (0) 11.41827044

Your local Allied Machine representative:

www.alliedmachine.com

Allied Machine & Engineering Co. Europe Ltd is registered to **ISO 9001:2015** by bsi.

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS.

Wohlhaupter GmbH is registered to **ISO 9001:2015** by QUACERT.

