



Are you looking for more from your tooling?

After facing problems with chatter and chipping inserts, our customer, who machines fueling machine head rotors from ASTM A276 - 304L in the nuclear power industry, sought a better solution to their machining process.

The customer turned to Allied for help finding a new solution. Once the causes of insert failure and chatter were identified, our experienced team was able to create the best assembly suitable for the application. Using **Wohlhaupter's analog balanced fine boring head** paired with the **NOVI^{TECH} vibration damper module**, they were able to eliminate the issues our customers were facing.

With the previous tooling, the customer achieved only 12 minutes of tool life, but with Allied's Wohlhaupter assembly, they achieved more than 4 times the life for 65 minutes!


Allied's Wohlhaupter assembly improved the machining process by making it more consistent and saved the customer money by reducing cost per hole. If you are looking to save time and money, **give us a call, and we will help you find the right solution.**



		Measure	Competitor Boring Head	Wohlhaupter Fine Boring Head with NOVI ^{TECH}
Product:	Wohlhaupter analog balanced fine boring head with NOVI ^{TECH}	RPM	106	372
Objectives:	(1) Decrease cycle time (2) Improve process	Speed Rate	131.234 SFM (40 M/min)	459.318 SFM (140 M/min)
Industry:	Renewable energy/energy	Feed Rate	0.003 IPR (0.076 mm/rev)	0.006 IPR (0.16 mm/rev)
Part:	Nuclear fueling machine head rotor	Penetration Rate	0.315 IPM (8 mm/min)	2.362 IPM (60 mm/min)
Material:	ASTM A276-304L	Cycle Time	2 hr 10 min	17 min
Hole Ø:	4.7244" (120 mm)	Tool Life	12 min	65 min
Hole Depth:	40.9449" (1040 mm)	Wohlhaupter offered 93.32% cost per hole savings over the competitor tooling.		

- ▶ Analog balanced fine boring head
- ▶ Boring insert
Item No. 297994WHC111
- ▶ NOVI^{TECH} vibration damper intermediate module
Item No. 519004

86.92%
cycle time reduction

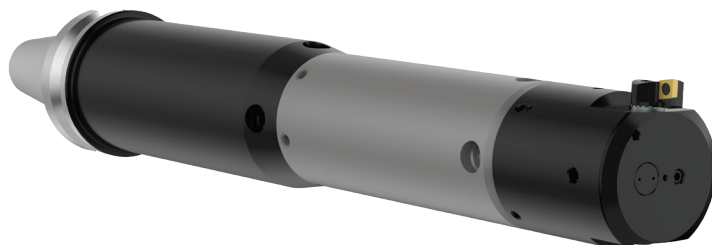

The Wohlhaupter boring head with the NOVI^{TECH} vibration damper module provided:

- ✓ Increased penetration rate
- ✓ Decreased cycle time
- ✓ Increased tool life
- ✓ Decreased cost per hole